

Certified, Filed and or Recorded on
Nov. 06, 2008 AT 08:49AM


Signed: CK
MARILYN J NOVAK G V J
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 18, Township 37 N, Range 29 W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/20/2008 found a 1/2" IRON PIPE ± 0.2' BELOW SURFACE ± 1.0'
SOUTH OF TRAVELED CENTERLINE.
- left monument as found lowered monument removed monument (explain)
- On _____ placed on _____

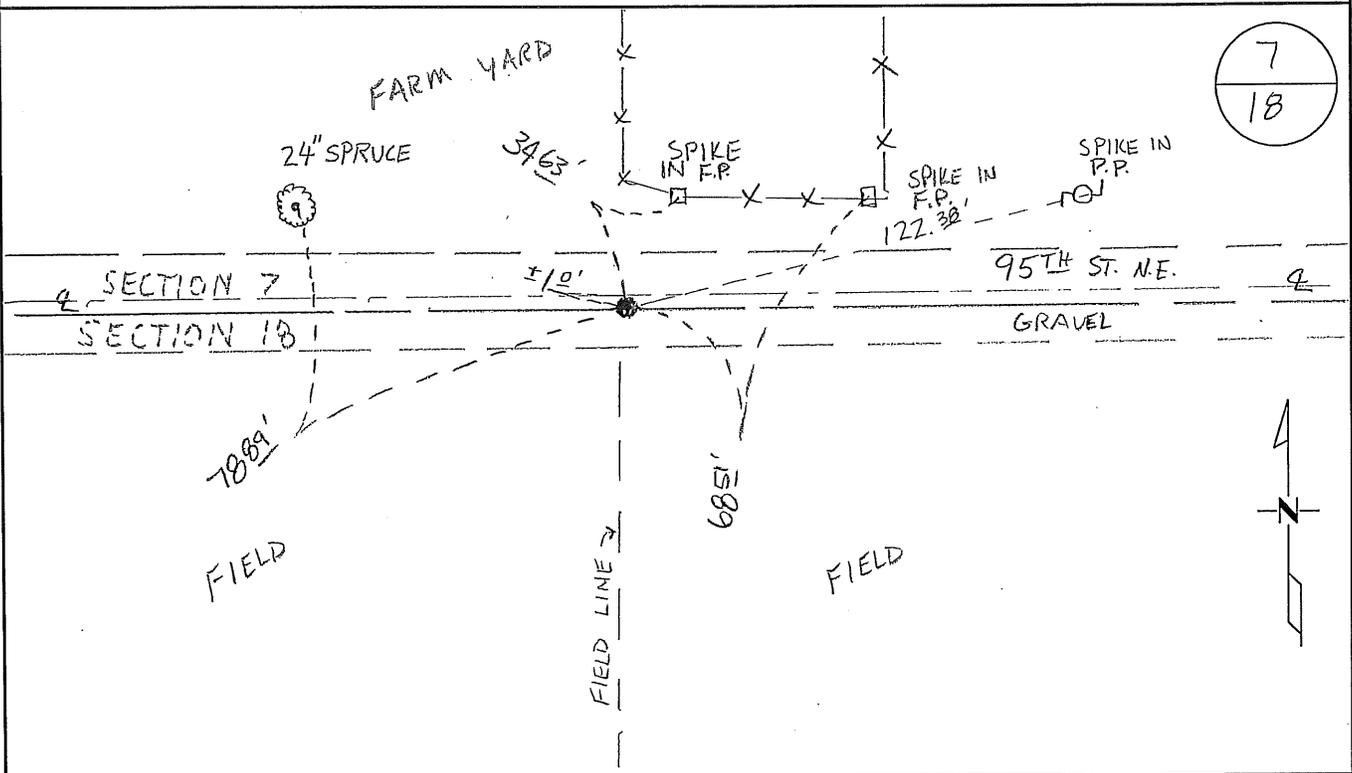

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oly
Deputy Benton County Surveyor
License No. 45872

Date: 11/03/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**H181**

North Quarter Corner of Section 18, Township 37 North, Range 29 West, Gilmanton Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked with a wood post with bearing trees noted as:

9" Blk Ash	S 54 E	8 links
12" Lynnwood	N 40 W	24 links

1899 Road Survey Report by John E. Whilt, County Surveyor, shows survey running west to east on section line with a distance of 81.05 chains for the north line of Sec. 18, with no mention of the ¼ corner.

1977 William Lunser, LS 9394, set a ½ " iron pipe in centerline of road east-west and fence line north. He filed a Certificate of Location (Doc. No. 147077).

2008 The County Surveyor's Office searched and found a ½" open iron pipe 0.2' below an east-west gravel road (95th St. NE) at 1± ft. south of the traveled centerline. The position fits a long standing fenceline to the north and a field line to the south. The power pole tie appears to agree with Lunser's tie from 1977. Distances to the NW Cor. and NE Cor. give 2669.54 ft. and 2652.34 ft. for a total length of the north line of Sec. 18 at 5321.88 ft. (80.63 ch.), which is reasonably close to Whilt's measurements in 1899 (81.05 ch.). The Surveyor accepts the ½" iron pipe as the best evidence and updated ties to same.

County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-153469.784
 E-513513.910

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 18, Township 37, Range 29, _____ P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On 6-20-1977 found a Marker by Occupation of road East and West, fence to North

left monument as found, lowered monument, removed monument (explain)

On _____ placed a 1/2 inch iron pipe

SKETCH OF REFERENCE TIES



Refer to next page

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William F. Lunsar 6-20-1977
SIGNATURE DATE

Registration No. 9394

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS ^{County Recorder}
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 9 .M. on the 20th day of December A.D., 1977


Register of Deeds F. A. Johnson
By County Recorder, Deputy

DOCUMENT NO. 147077

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 20th day of June, 1977
I did Find the North Quarter corner of Section 18,
Twp. 37, Rg. 29, Benton County, Minnesota, which
was evidenced by Occupation of road East & West, fence to
North

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of 1/2 inch iron pipe and that
I did establish witness or reference monuments as shown below:

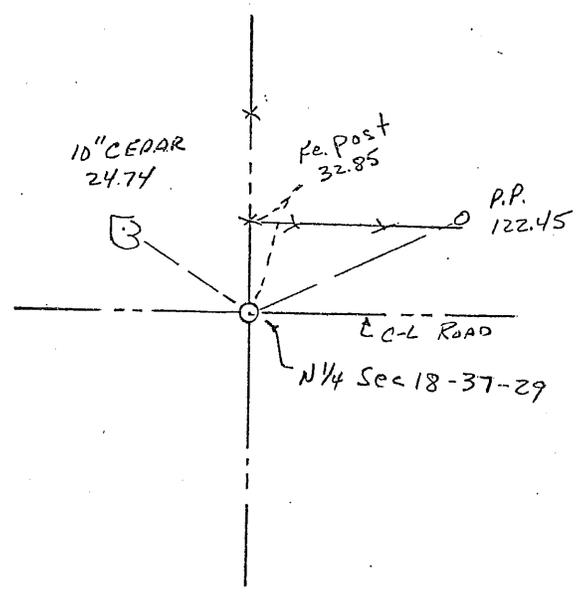

147077

I hereby certify that the
above is true and correct
and that I am a registered
Land Surveyor under the laws
of the State of Minnesota.
William F. Jensen

Minn. Registration No. 9394

County Recorder
Office of the ~~Register~~ of Deeds,
Benton County, Minn.

I hereby certify that the within
instrument was filed for record
in this office on the 20 day of
December, 1977 at 9 A.M.

F.G. Johnson
Register of Deeds *County Recorder*

By _____ Deputy.