

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH 1/4 Corner of Section 26, Township 37N, Range 29 W, 4TH P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 29 AUG 1988 found a FLAT TOP STONE 3 FEET BELOW BITUMINOUS SURFACE  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 29 AUG 1988 placed a CAST IRON MONUMENT  
DATE

### SKETCH OF REFERENCE TIES

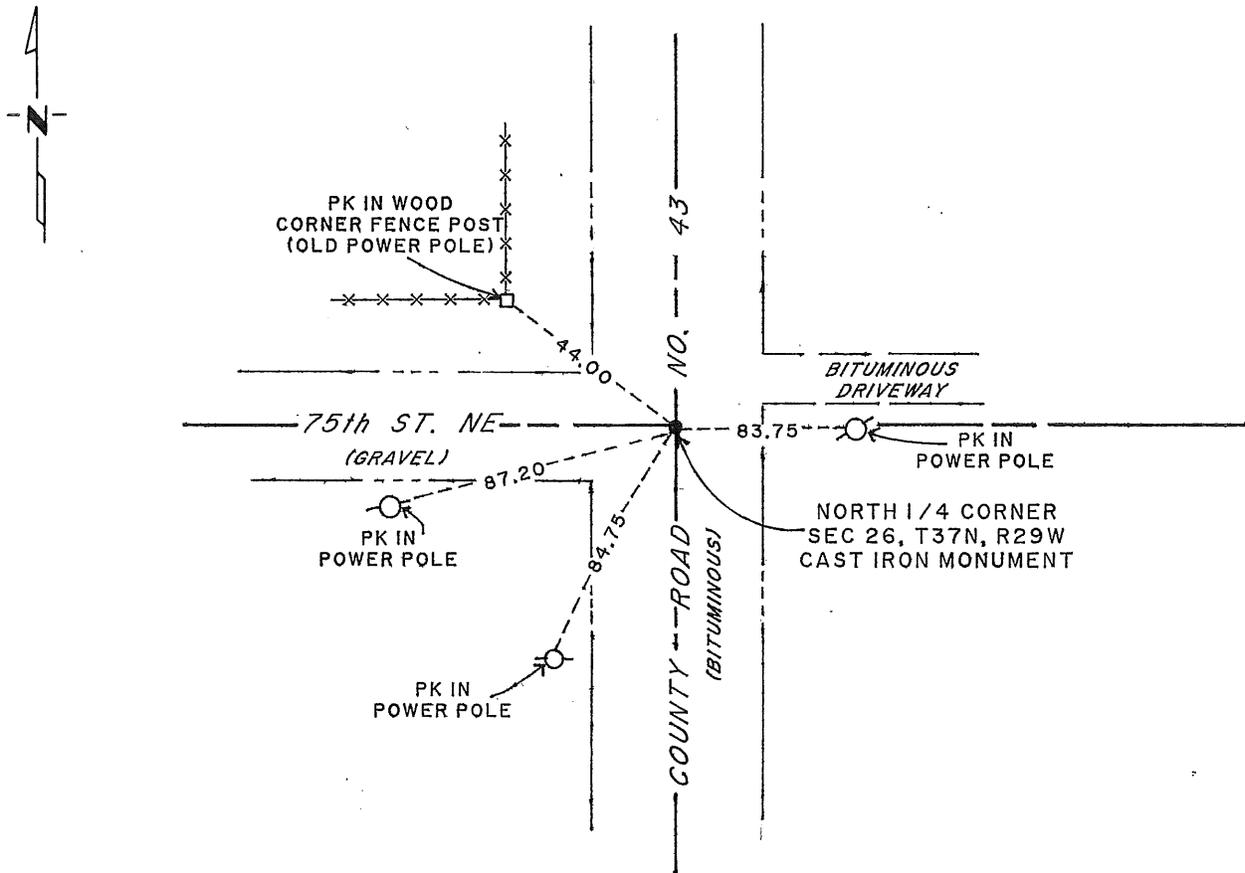

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Bruce W. Shenton* 12-20-88  
SIGNATURE DATE

Registration No. 17768

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

#### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

NORTH QUARTER CORNER, SECTION 26, T37N, R29W, 4TH P.M.

1. During the G.L.O. Survey of 1858, Mr. Oscar F. Davis, a U.S. Deputy surveyor, set a wood post to mark this corner.
2. Benton County's old surveyor's books provided no information to relocate said corner.
3. On August 29, 1988, Paul E. Wellen & Associates Inc., dug with a backhoe at the location of said corner and found a flat top stone 3 feet below the existing bituminous road surface. We set a cast iron monument above this stone, flush with the existing bituminous surface.

191332

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 20 9 03 AM '89

ALICE G. ENGBERMYER  
COUNTY RECORDER

BY Al DEPUTY

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH 1/4 Corner of Section 26, Township 37N, Range 29W, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 29 AUG 1988 found a FLAT TOP STONE 3 FEET BELOW BITUMINOUS SURFACE.  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 29 AUG 1988 placed a CAST IRON MONUMENT OVER STONE AND FLUSH  
DATE WITH EXISTING BITUMINOUS

### SKETCH OF REFERENCE TIES

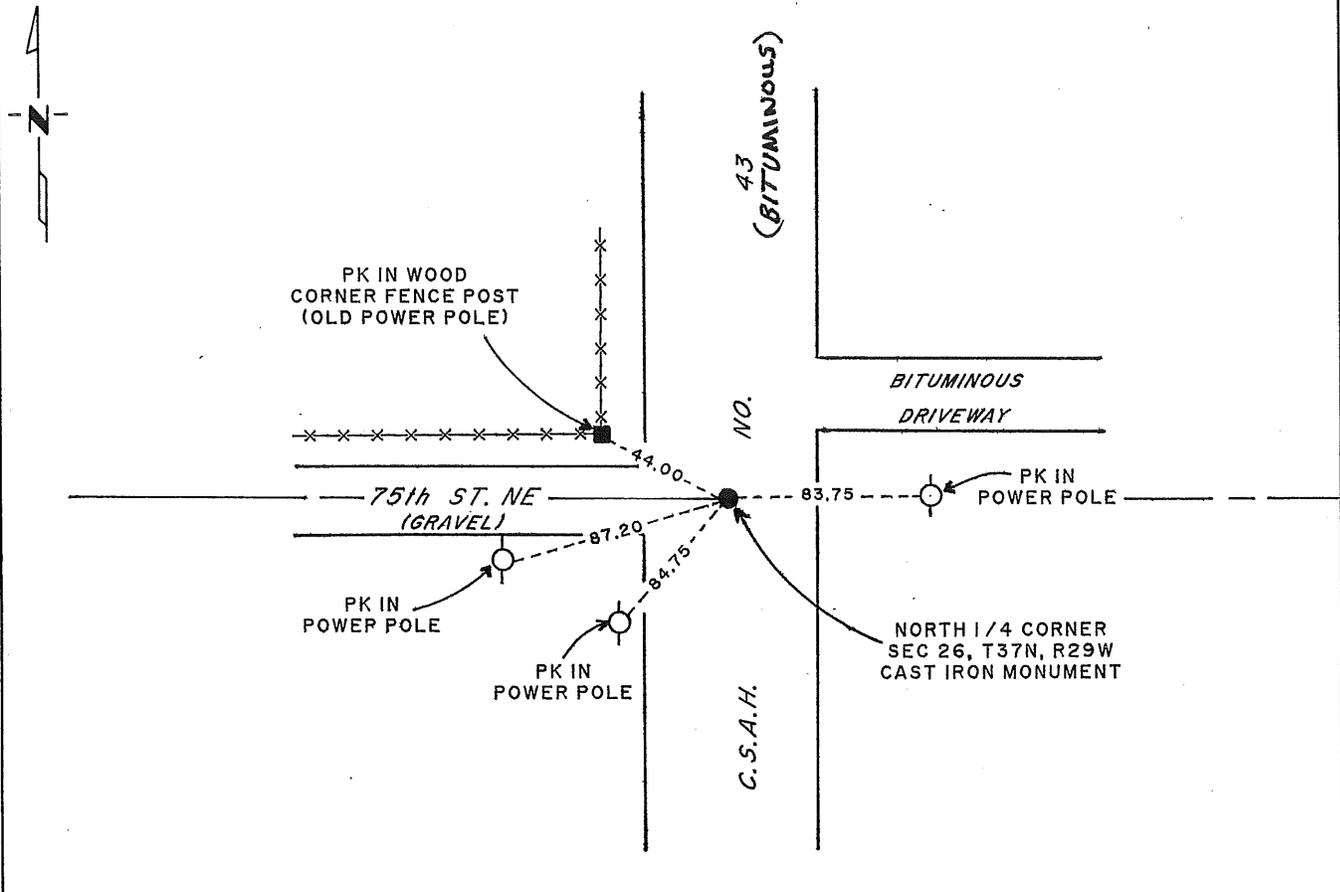

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Shipton 11-22-88  
SIGNATURE DATE

Registration No. 17768

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

1. The original survey was accomplished in July of 1855 by Oscar F. Davis.
2. The old County surveyor's books provided no information about said corner.
3. On August 29, 1988, Paul E. Wellen and Assoc. found a flat top stone in the centerlines of the north-south County Road & centerline of Township road west. Said stone was 3 feet below the bituminous surface. We placed a cast iron monument over said stone and made reference ties as indicated.

191225

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 12 11 42 AM '89

ALICE G. ENGELMEYER  
COUNTY RECORDER

BY *Alice C. Engelmeier*  
[Signature]