


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 3, Township 37, Range 29, \_\_\_\_\_ P.M.  
STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On 4-27-93 found a 1/2" SOLID IRON  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 6-17-93 placed a STANDARD CAST IRON MONUMENT  
DATE

### SKETCH OF REFERENCE TIES

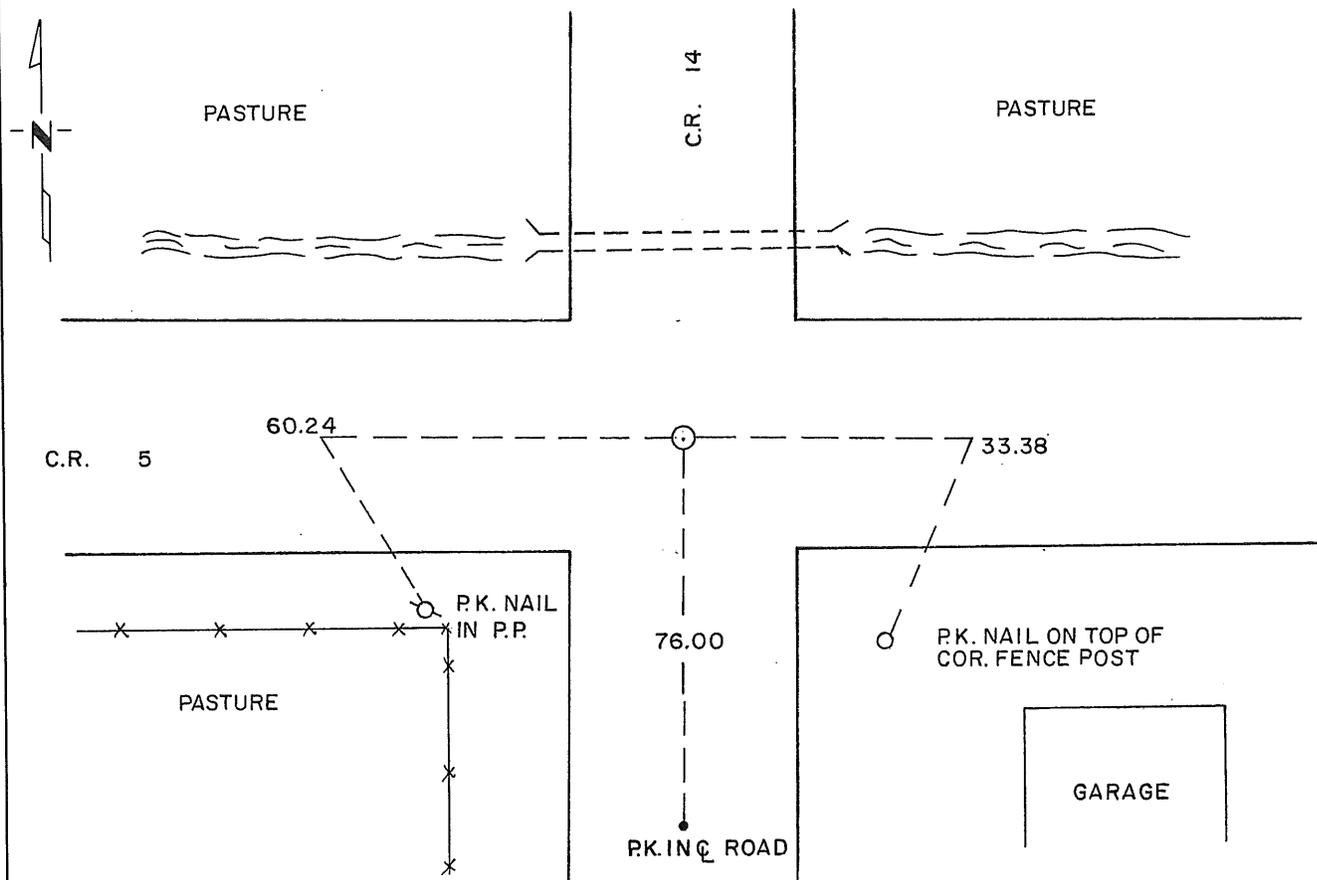

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sidney P. Williamson 5/24/94  
SIGNATURE DATE

Registration No. 10918

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

1. The original government survey was performed in 1855.
2. On April 22, 1895 Felix Parent found the original government corner.
3. The 1960 road plans indicate one iron over a stone monument.
4. On April 27th 1993 Williamson-Kotsmith, Inc. found a  $\frac{1}{2}$  inch solid iron.
5. On June 17th 1993 Williamson-Kotsmith, Inc. removed iron and set a Standard Benton County Cast Iron Monument at the same location.

223490

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JUN 17 1 10 PM '94

ALICE S. ENFELMEYER  
COUNTY RECORDER

BY  DEPUTY

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North NORTHEAST Corner of Section 3, Township 37, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 4-24-91 found a 1" solid pin over a Stone Monument at intersection of center line roads North, South, East, and West
  - left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_

### SKETCH OF REFERENCE TIES

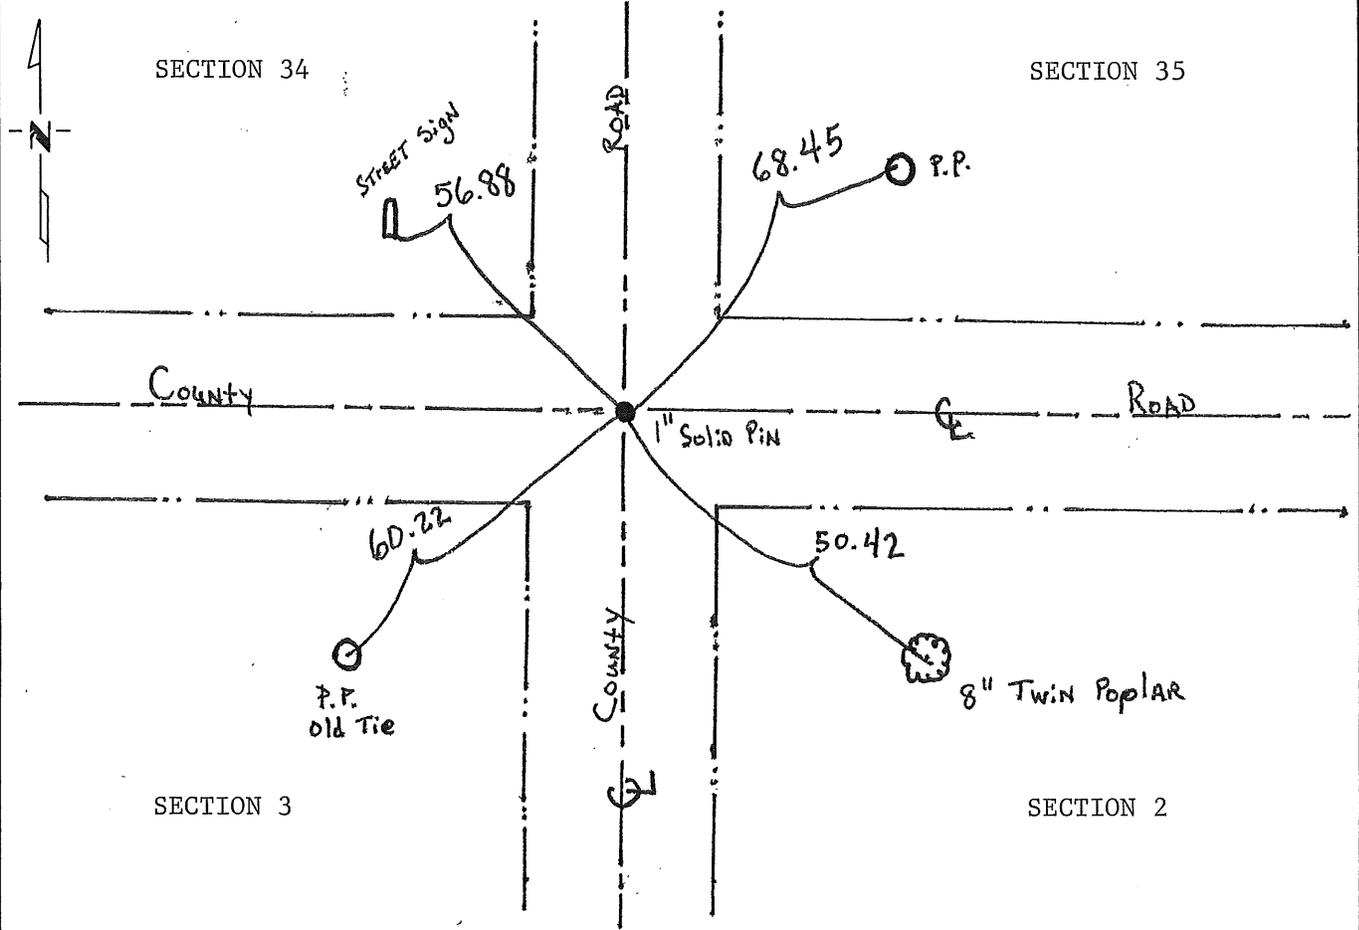

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David P. Regan 5/12/94  
SIGNATURE DATE

Registration No. 12236

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

The G.L.O. survey was done in 1849 by Theodore Conkey.

The County Surveyors records in Book 1, Page 465 show a "iron monument over a stone" at this corner...

On 4/91, Regan Land Surveyors, Inc. searched the area and found a 1 inch solid pin over a stone monument at the intersection of centerline roads North, South, East, and West.

223470

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JUN 17 1 02 PM '94

ALICE O. FISCHMEYER  
COUNTY RECORDER

BY Jed DEPUTY