

Certified, Filed and or Recorded on
Nov. 07, 2008 AT 02:29PM


Signed: MJ
MARILYN J NOVAK
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 14, Township 37N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
- left monument as found lowered monument removed monument (explain)
- On 10/29/08 placed an 1/2" IRON PIPE WITH CAP #19552 DOWN 0.3'

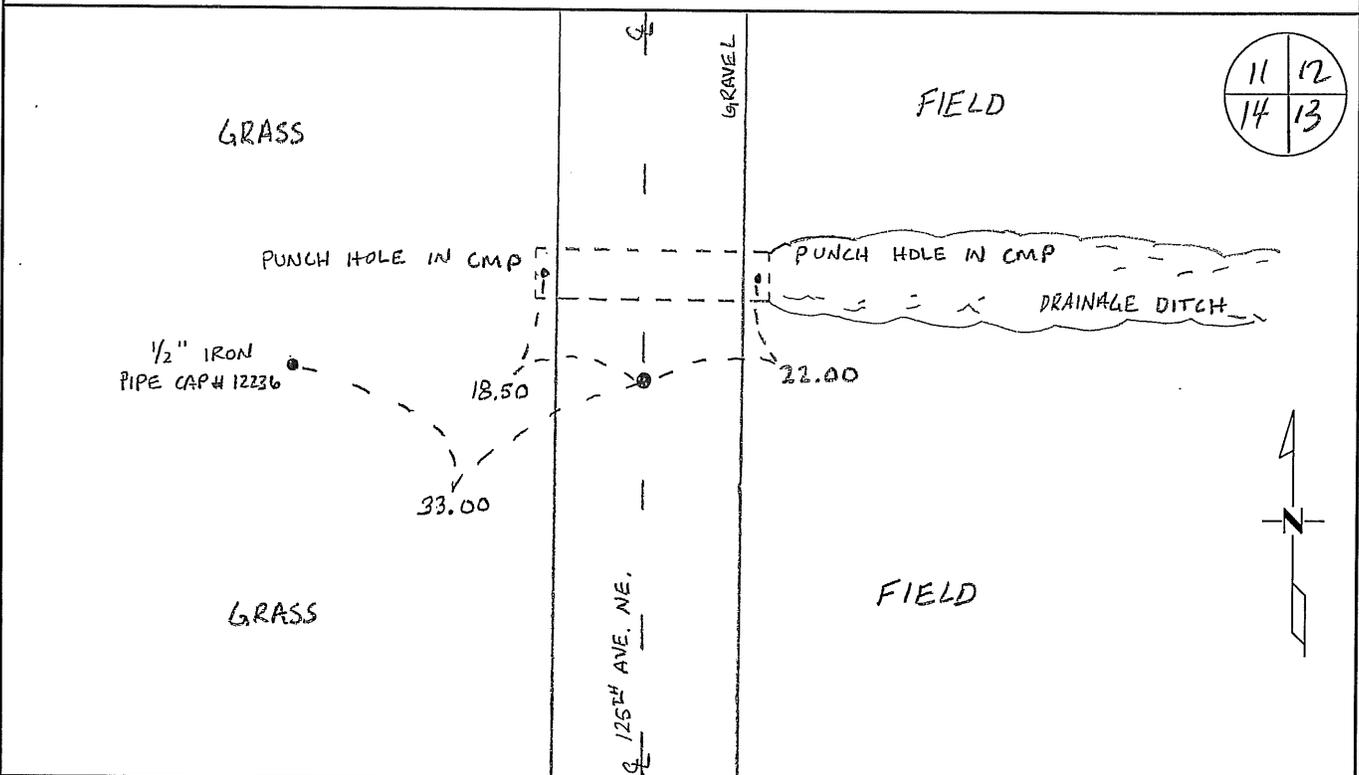

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jean W. [Signature]
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008
PAGE 1 OF 2

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

H142

Northeast Corner of Section 14, Township 37 North, Range 29 West, Gilmanton Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.

5" Tamarack	N 13 ½ E	27 links
5" Tamarack	S 17 W	12 links

1901? County Surveyor's Record Book 1, page 485, and Record Book A, Map No. 34, shows a survey by John Whilt for Section 13 with a distance of 39.36 chains to the North ¼ corner Sec 13 and a distance of 40.65 chains to the East ¼ corner Sec 14.

2008 The County Surveyor's Office searched and found a ½" iron pipe capped 12236 33.00 ft. west of the centerline of a north-south gravel road (125th Ave NE). A further search to the west revealed a long standing fenceline running westerly toward the N ¼ Cor. position. Projecting a line easterly through the old fenceline and iron pipe toward the point of centerline of said north-south road gives distances to the E ¼ Cor. of Sec. 14 as 2681.63 ft. (40.63 ch.) and to the N ¼ Cor. of Sec. 13 as 2597.31 ft. (39.35 ch.), which agrees well with Whilt's 1901 measurements. The corner is accepted as marking the obliterated position and ties were made.

County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-153738.798
 E-537220.424