

Certified, Filed and or Recorded on  
Nov. 07, 2008 AT 02:21PM

Signed: JU  
MARILYN J NOVAK  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 17, Township 37N, Range 29W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10/29/08 found a PK NAIL IN ROAD FLUSH TO ROAD SURFACE

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

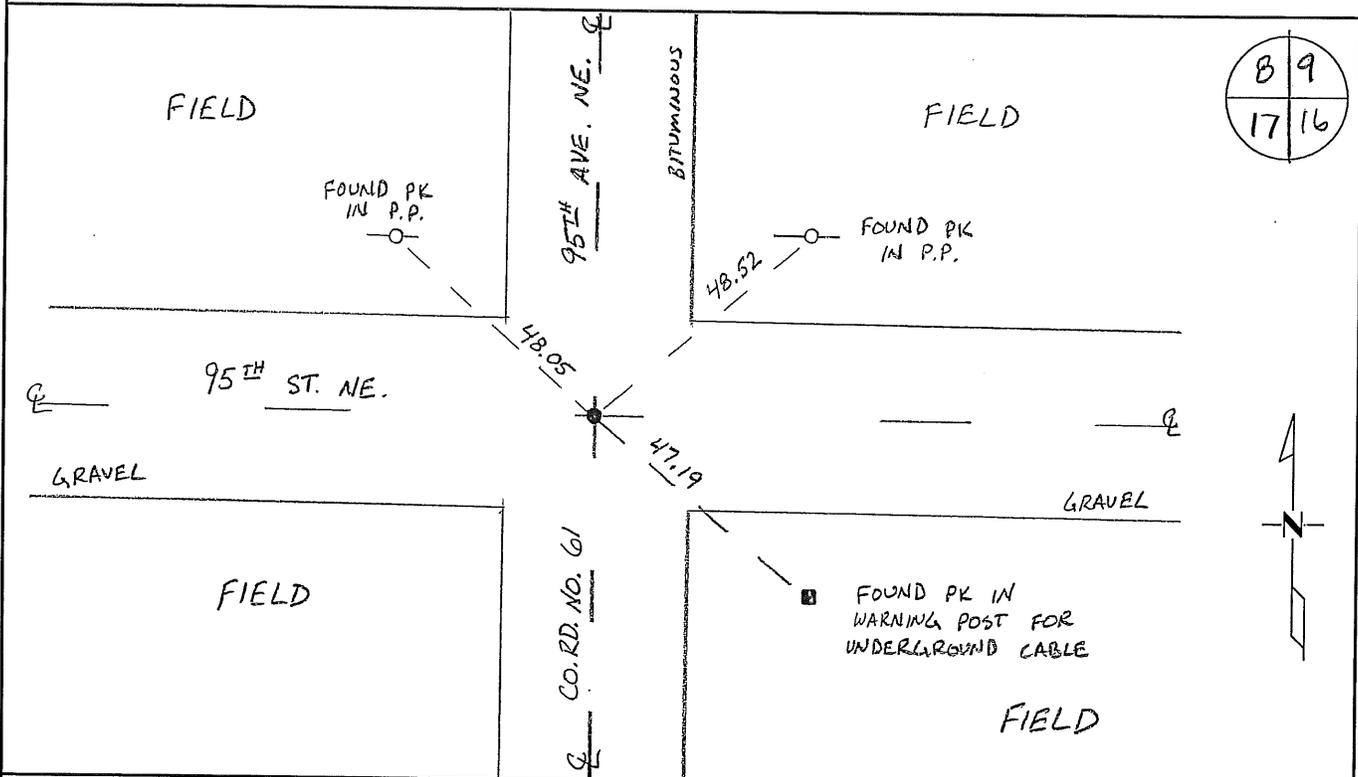

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oley  
Deputy Benton County Surveyor  
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

Statement of Evidence:

H172

Northeast Corner of Section 17, Township 37 North, Range 29 West, Gilmanton Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked with a wood post with bearing trees noted as:

16" Sugar	N 80 ½ E	61 links
30" W Oak	N 19 W	64 links

1949 County Highway Engineer's Notebook No. 169 contains road survey for CAR 37 running from south to north on the section line. Corner is shown marked by a stake in the center of road with town road east and west. Ties are the same as listed below.

1949 County Surveyor's Record Book 1, page 493, shows Elletson's ties to a stake:

10" Maple	SE	88.5'
12" Elm	SE	135.5'

1987 Paul Wellen, LS 10461, found a ¾" iron pipe in centerline of roads north-south and east-west. He replaced the pipe with a cast iron monument and filed a Certificate of Location (Doc. No. 184287). His notes give measurements of 2624.11 feet to the East ¼ corner and 2668.00 feet to the North ¼ corner of Section 17.

2008 The County Surveyor's Office searched and found a PK Nail over Wellen's 1987 cast iron monument position, at the intersection of County Road 61 and 95<sup>th</sup> Ave. NE. Distances to the N ¼ Cor. of Sec. 17 and the E ¼ Cor. of Sec. 17 yield 2668.01 ft. and 2624.27 ft., respectively. The Surveyor accepts the position as marking the best evidence and ties were updated.

County Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-153604.843  
 E-521501.422


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 17, Township 37, Range 29, 4th P.M.  
STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 4-14-87 found a 3/4 inch iron pipe at the intersection of the Center Line of County Road 61 and 95th St NE  
 left monument as found,  lowered monument,  removed monument (explain)
- On 6-8-87 placed a Cast Iron Monument

## SKETCH OF REFERENCE TIES

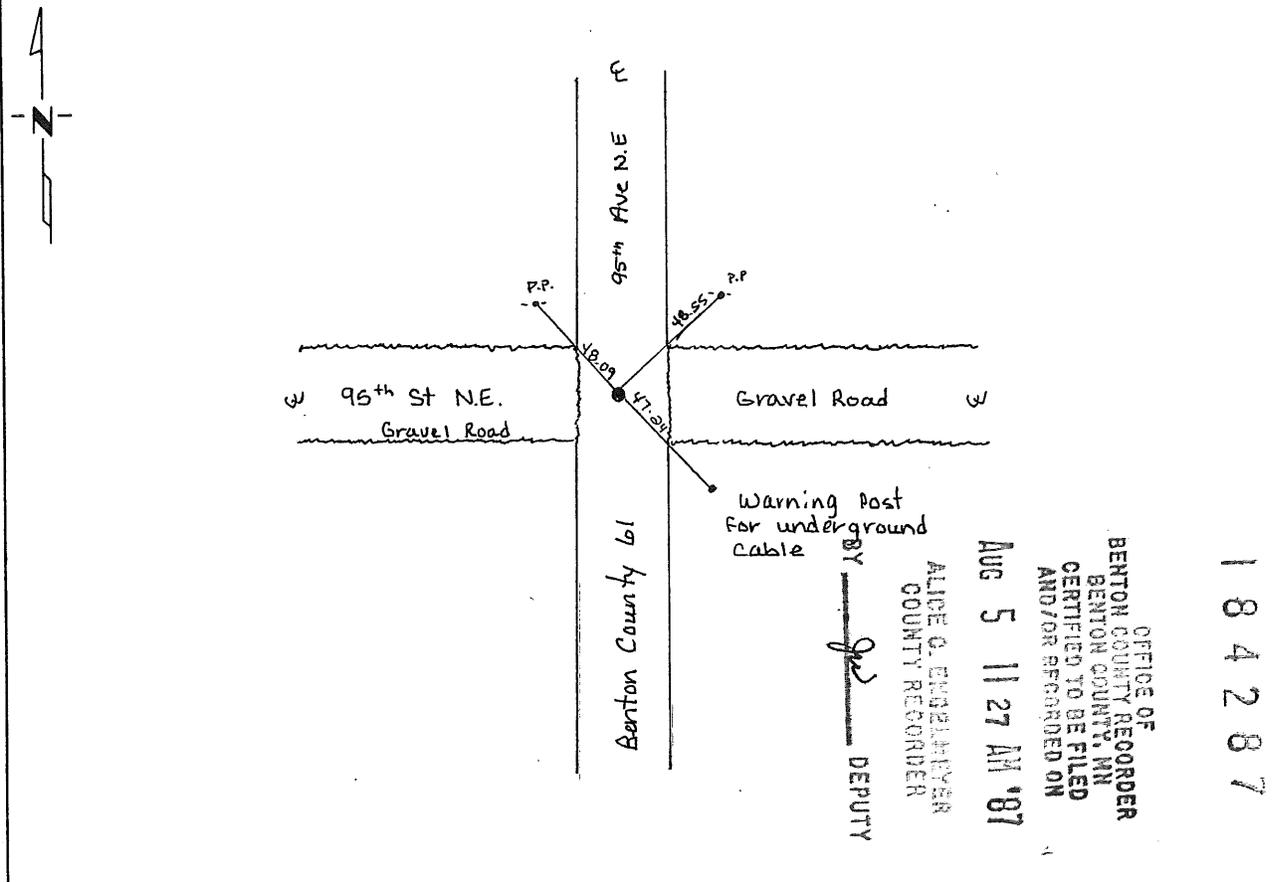

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 6-29-87  
SIGNATURE DATE

Registration No. 10461

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_