

Certified, Filed and or Recorded on  
Nov. 07, 2008 AT 02:22PM


Signed: Ju  
MARILYN J NOVAK  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 18, Township 37N, Range 29W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/29/08 found a 1/2" IRON PIPE OPEN DOWN 0.8'
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

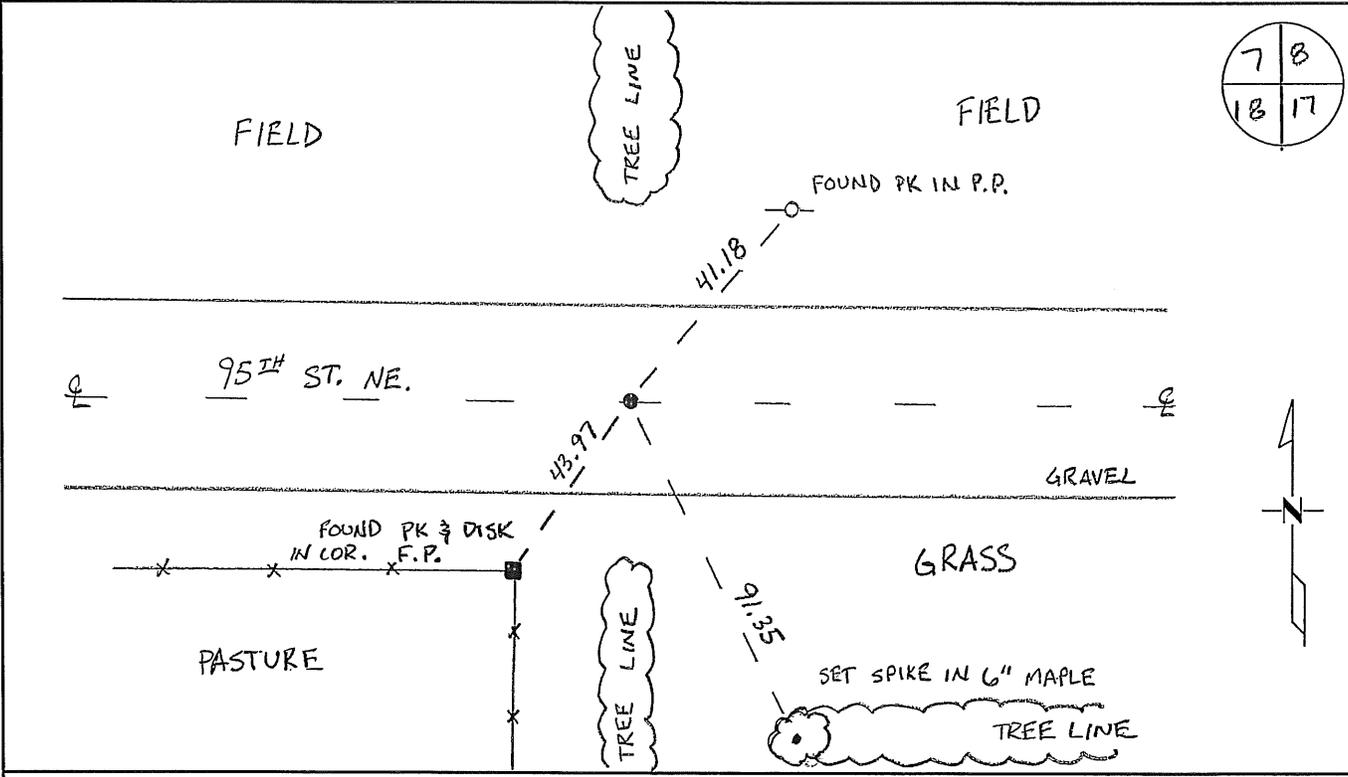

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Ju W. Oly  
Deputy Benton County Surveyor  
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:****H182**

Northeast Corner of Section 18, Township 37 North, Range 29 West, Gilmanton Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked with a wood post with bearing trees noted as:

24" Maple	S 58 W	7 links
18" Maple	S 61 E	28 links

1899 Road Survey Report by John E. Whilt, County Surveyor, shows survey running west to east on section line with a distance of 81.05 chains for the north line of Sec. 18. Road survey terminated 12.50 chains west of this corner, which is shown in an east-west cartway.

1977 William Lunser, LS 9394, set a ½ " iron pipe in centerline of road east-west and fence line north. He filed a Certificate of Location (Doc. No. 147078).

1980 Paul Wellen, LS 10461, measured 2646.01 feet to the East ¼ corner of Section 18.

1987 Paul Wellen measured 5241.13 feet to the NE corner of Section 19.

2008 The County Surveyor's Office searched and found a ½" iron pipe as set by Lunser in 1977. Position falls along centerline of an east-west gravel road (95<sup>th</sup> St. NE) and on line with north-south tree lines. Distance to the NW Corner measures 5321.83 ft. (80.63 ch.), which falls 27.47 ft. (.42. ch.) short of Whilt's 1899 distance. Distances to the E ¼ Cor. of Sec. 18 and the NE Cor. of Sec. 19 measure 2646.73 ft. and 5241.45 ft., respectively, which agree with Wellen's measurements.

County Coordinates Obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-153481.830  
 E-516166.218

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 18, Township 37, Range 29, \_\_\_\_\_ P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On 6-20-1977 found a \_\_\_\_\_ by occupation of road East & West, fence to North. DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a 1/2 inch iron pipe  
DATE

### SKETCH OF REFERENCE TIES



Refer to next page

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William F. Lunser 6-20-1977  
SIGNATURE DATE

Registration No. 7394

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS County Recorder  
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 9 .M. on the 20th day of December A.D., 1977

Register of Deeds F. G. Johnson  
By County Recorder, Deputy


DOCUMENT NO. 147078

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 20<sup>th</sup> day of June, 1977  
I did Find Set the Northeast corner of Section 18,  
Twp. 37, Rg. 29, Benton County, Minnesota, which  
was evidenced by Occupation of road East & West, fence to North.

\_\_\_\_\_  
\_\_\_\_\_

I further certify that in order to perpetuate said corner I did  
at the exact location thereof place a permanent marker consisting  
of 1/2 inch iron pipe and that  
I did establish witness or reference monuments as shown below:

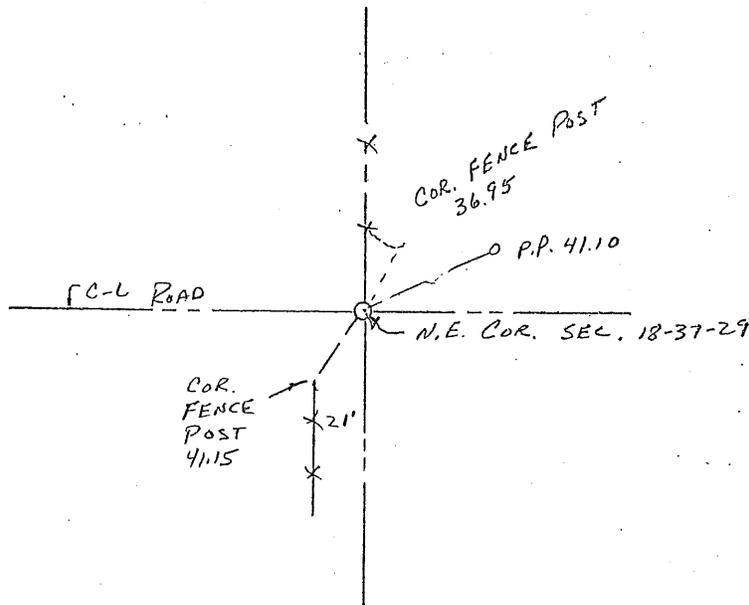

147078

I hereby certify that the  
above is true and correct  
and that I am a registered  
Land Surveyor under the laws  
of the State of Minnesota.

William F. Linn

Minn. Registration No. 9394

County Recorder  
Office of the ~~Register of Deeds~~,  
Benton County, Minn.

I hereby certify that the within  
instrument was filed for record  
in this office on the 20<sup>th</sup> day of  
December, 1977.

F.A. Johnson  
~~Register of Deeds~~ County Recorder

By \_\_\_\_\_ Deputy.