

Certified, Filed and or Recorded on
Nov. 07, 2008 AT 02:20PM


Signed: MJ
MARILYN J NOVAK 5 V 7
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 20, Township 37N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/29/08 found a CAST IRON MONUMENT DOWN 0.1'
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

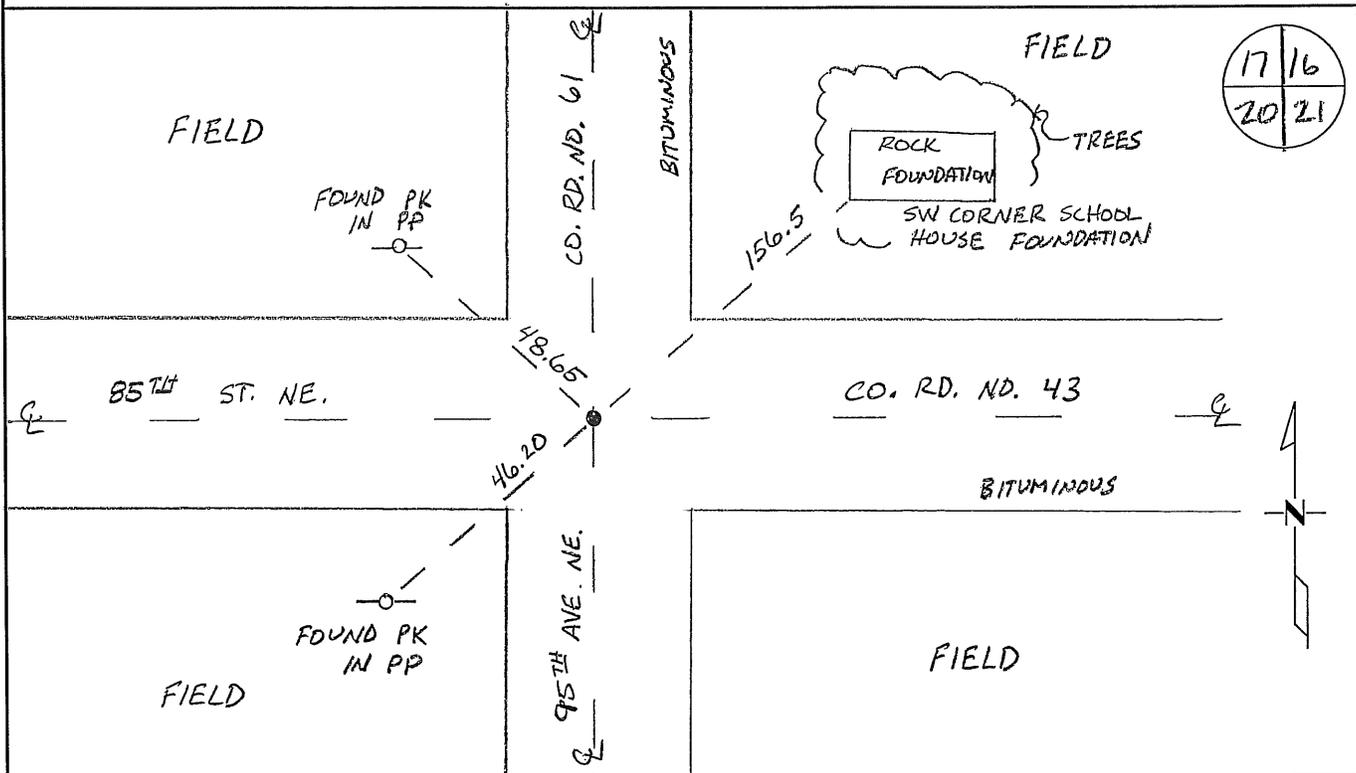

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 11/06/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**H202**

Northeast Corner of Section 20, Township 37 North, Range 29 West, Gilmanton Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked with a wood post with bearing trees noted as:

16" Sugar	S 30 W	28 links
18" Sugar	N 35 E	25 links

1939 County Engineer's Notebook No. 158 contains road survey for CAR No. 20 running east to west along the section line. Corner is shown as a spike set in center of road with CAR 37 north and south. Ties:

S. end Culv.	SW	27.15'
N. end Culv.	NW	29.1'

1949 County Highway Engineer's Notebook No. 169 contains road survey for CAR 37 running from south to north on the section line. Corner is shown marked by a hub set in the center of CAR 20. Ties are the same as listed below.

1949 County Surveyor's Record Book 1, page 499, lists ties to a hub by H. G. Elletson:

PP	SW	46.5
SW Cor Sch Hse	NE	155.6

1953 Ties in Notebook 158:

S. end Culv.	SW	53.6'
N. end Culv.	NW	52.75'

(Same ties listed in Notebbok No. 169 dated 1957.)

1987 Paul Wellen, LS 10461, found a 1/2" iron pipe in the intersection of roads north/south and east/west. He replaced it with a cast iron monument and filed a Certificate of Location (#184289).

2008 The County Surveyor's Office searched and found Wellen's 1987 cast iron monument at the intersection of north-south (County Road 61) and east-west (County Road 43) roads. The tie to the SW corner of the old School House measured 156.5 ft., and a PP SW measured 46.2 ft. which agrees with 1949 ties. The Surveyor accepts the position as marking the best evidence and updated ties.

County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-148336.038
 E-521359.016


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 20, Township 37, Range 29, 4th P.M.
 STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 4-14-87 found a 1/2 inch iron pipe at the intersection of the Center Lines of County Road 43 and County Road 61
DATE
 left monument as found, lowered monument, removed monument (explain)
- On 6-8-87 placed a Cast Iron Monument
DATE

SKETCH OF REFERENCE TIES

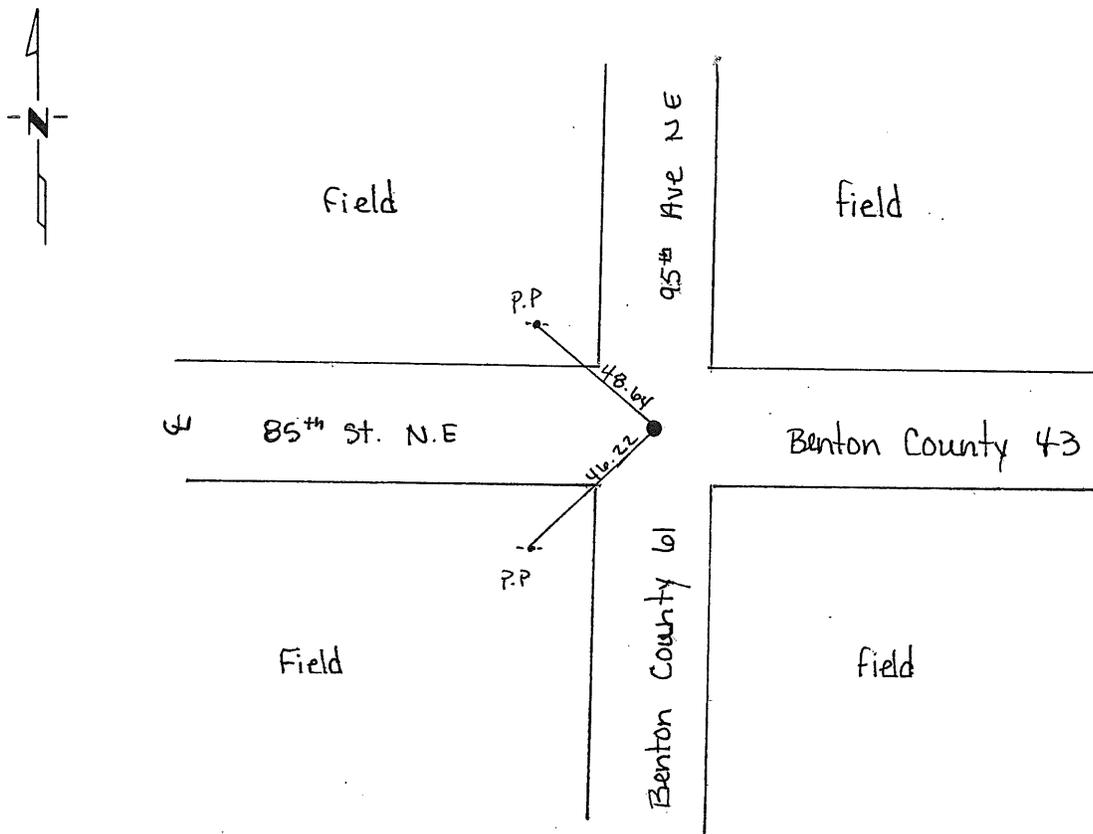

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] SIGNATURE 6-29-87 DATE

Registration No. 10461
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
 County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____
 By _____, Deputy
 DOCUMENT NO. _____

Statement of Evidence:

1 8 4 2 8 9

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MI
CERTIFIED TO BE FILED
AND/OR RECORDED ON

AUG 5 11 27 AM '87

ALICE G. ENGELMEYER
COUNTY RECORDER

BY *gw* DEPUTY