

Certified, Filed and or Recorded on
Nov. 06, 2008 AT 08:52AM


Signed: CK
MARILYN J NOVAK G V ✓
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 21, Township 37N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 23 OCT 2006 found a PK NAIL @ CIM LOCATION.
- left monument as found lowered monument removed monument (explain)
- On 23 OCT 2008 placed an PK NAIL & BENTON COUNTY BRASS DISC

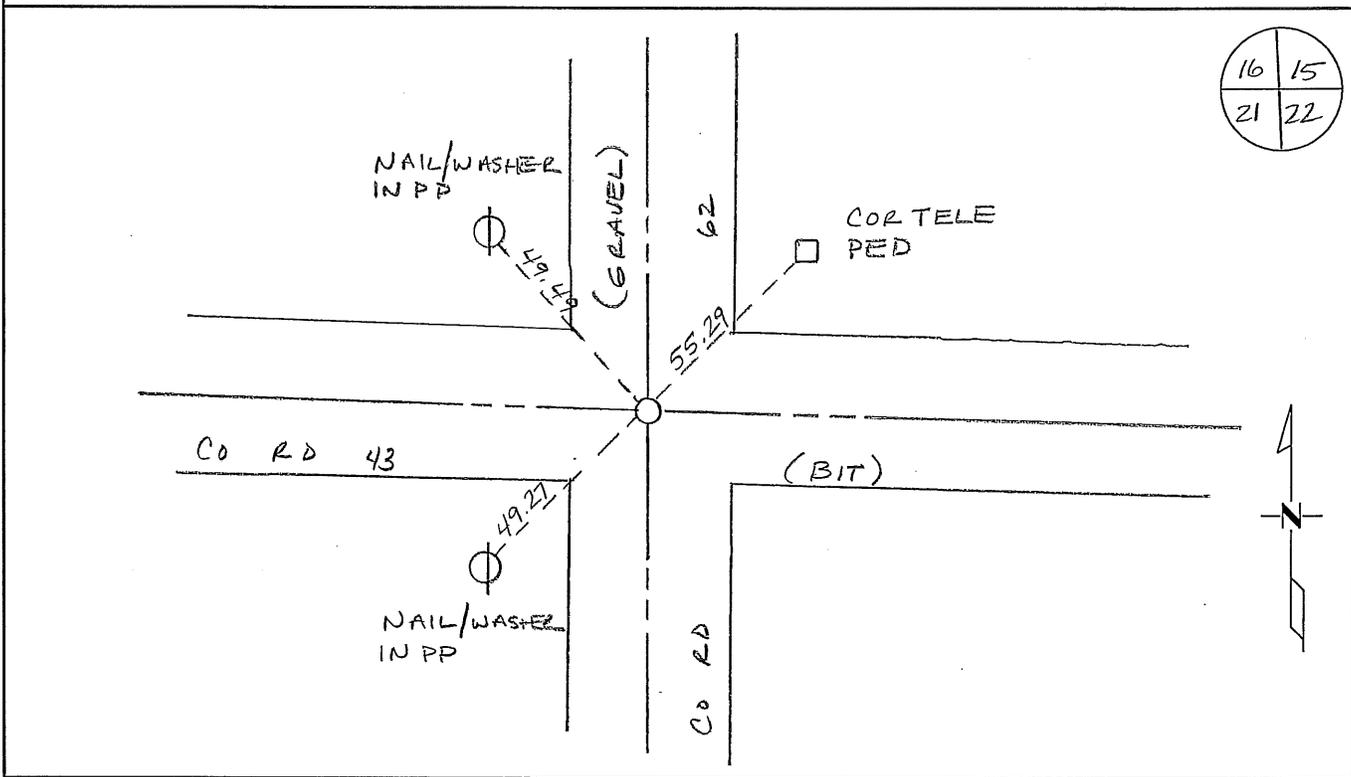

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 11/03/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

H212


Northeast Corner of Section 21, Township 37 North, Range 29 West, Gilmanton Township, 4th
 Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey established corner marked with a wood post with bearing trees noted as:
- | | | |
|-------------|--------|----------|
| 20" Linden | N 83 W | 11 links |
| 7" Ironwood | N 34 E | 10 links |
- 1937 County Engineer's Notebook No. 99 contains a road survey for CAR No. 28 running south to north. Notes show corner marked by a spike with town road east and west. Ties:
- | | | |
|---------------|----|------|
| Twin Boxelder | NE | 37.4 |
| FP | NW | 49.3 |
- 1939 County Engineer's Notebook No. 158 contains road survey for CAR No. 20 running east to west along the section line. Corner is shown as a spike set in center of road intersection with CAR 28 running north-south. Ties:
- | | | |
|-----------------|----|-------|
| FP | NE | 47.0' |
| NW Cor Twp Hall | SE | 61.8' |
- 1981 Paul Wellen, LS 10461, found a ¾" I.P. in the centerline of roads north/south and east/west. He replaced it with a cast iron monument. He filed a Certificate of Location (#160213). Notes give a distance of 2720.63 feet to the East ¼ corner of Section 16. (Compares well with 1937 distance of 2719.4 feet.) Gives tie of 145.05 feet SW to the NE corner of town hall. (Assume town hall was moved.)
- 1995 Comstock and Davis performed GPS work under contract with Benton County and Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a CIM:
- | |
|----------------|
| N- 148263.407 |
| E - 526656.891 |
- 2003 County Coordinates Obtained by GPS to PK Nail
 NAD 83 (1996 Adjustment)
 N- 148263.650
 E- 526656.573
- 2008 The County Surveyor's Office searched and found the PK nail referenced in 2003 flush with the surface at the intersection of a north-south gravel road (County Road No. 62) and an east-west bituminous road (County Road No. 43). PK nail was removed to check for CIM, but nothing was found. Position of PK nail gives distance of 2720.61 feet to the E ¼ corner of Section 16, which agrees with distance reported by Wellen in 1981 of 2720.63 feet. The tie to the Town Halls also check with Wellen's 1981 information. The Surveyor accepts the PK nail as marking the CIM set by Wellen and perpetuating the obliterated position of the corner. Ties were updated.
- County Coordinates to PK Nail by GPS
 NAD 83 (1996 Adjustment)
 N- 148263.596
 E- 526656.555

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 6th day of April, 19 81
 I did find the northeast corner of Section 21,
 Twp. 37N, Rg. 29W, Benton County, Minnesota, which
 was evidenced by 3/4 inch iron pipe in the intersection of roads north,
south, east and west.

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of a Benton County Cast Iron Monument and that
 I did establish witness or reference monuments as shown below:

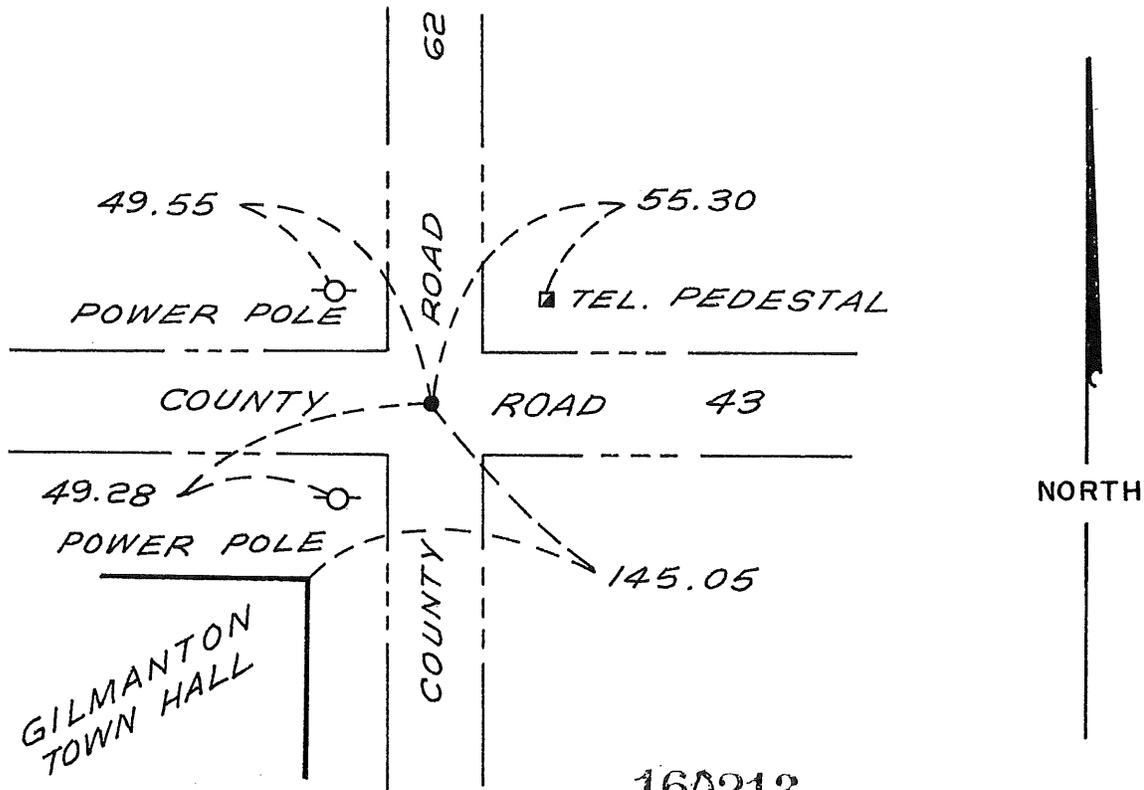

160213

81-31 B-19 P-128

I hereby certify that the above
 is true and correct and that I am
 a registered Land Surveyor under
 the laws of the State of Minnesota.

Jan J. Allen

Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
 was filed for record in this office on the
10th day of September, 1981 at 2 P.M.

F. A. Johnson

 County Recorder

By _____ Deputy.