

Certified, Filed and or Recorded on
Nov. 06, 2008 AT 08:53AM


Signed: CK
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH EAST Corner of Section 23, Township 31N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 23 OCT 2008 found a 1/2" IRON PIPE. CAP DESTROYED @ E ROAD
AND OLD FENCE NORTH
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

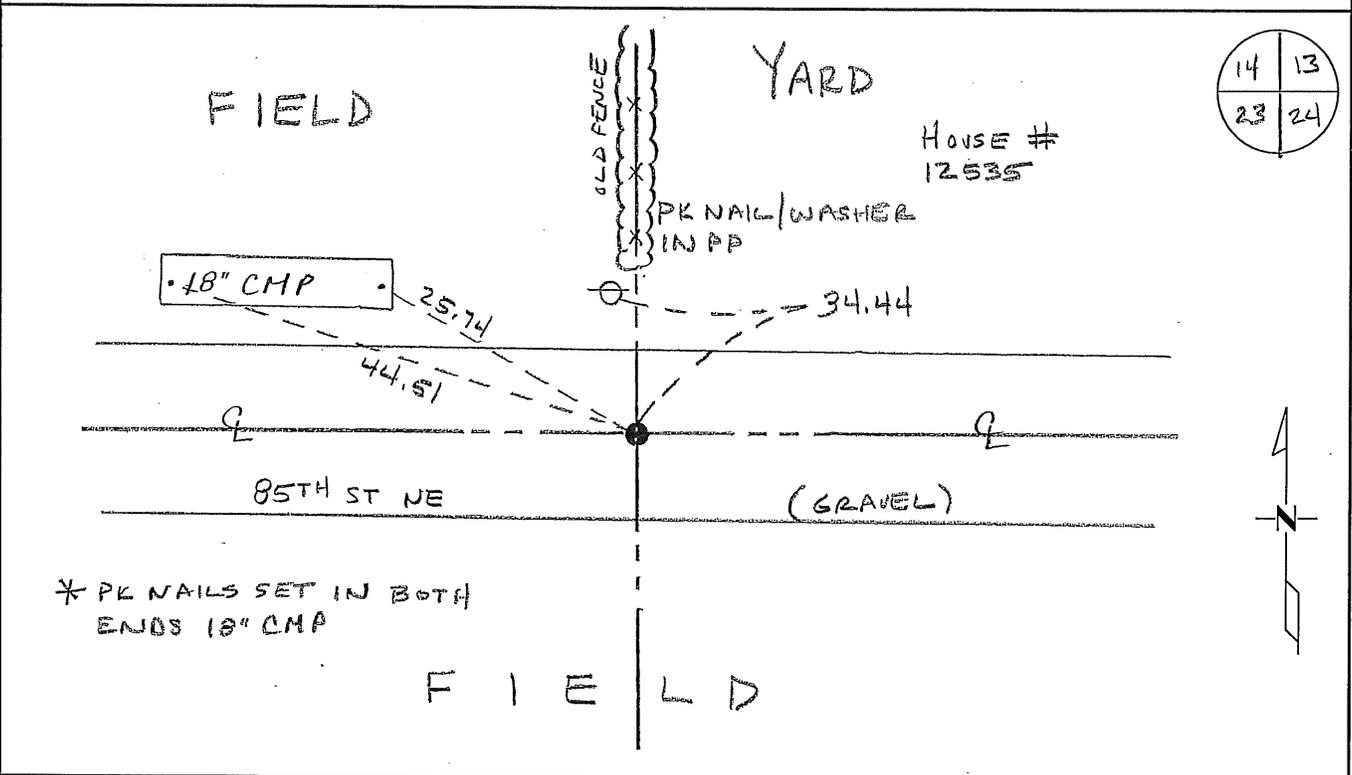

14	13
23	24

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 11/03/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**H232**

Northeast Corner of Section 23, Township 37 North, Range 29 West, Gilmanton Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked with a wood post with bearing trees noted as:

24" Sugar	S 26 ½ W	26 links
22" Blk Oak	N 14 ½ E	34 links

1901 County Surveyor's Record Book A, Map No. 34, contains a survey of Section 13 by John Whilt, which shows this corner.

1972 County Highway: Kotsmith notes the following reference ties

FP	SW	71.6
PP	NW	48.65
TP	SE	48.1

1993 David Regan, LS 12236, set a ½" I.M. in the centerline of a road east/west and a fence line north. He filed a Certificate of Location (#231249).

2004 Westwood Professional Services, Inc. found a ½" iron pipe with cap No. 12236. County Coordinates Obtained by GPS:
 NAD 83 (1996 Adjustment)
 N- 148357.510
 E- 537295.569

2008 The County Surveyor's Office searched and found a ½" capped iron pipe at the centerline of an east-west gravel road (85th Street N.E.) and on line with a north fence line. Ties from 1972 were not recovered. Surveyor accepts the position as best evidence and updated ties. Coordinates obtained agree with those reported by Westwood Professional Services, Inc. in 2004, above.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Quarter _____ Corner of Section 23, Township 37, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton



At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 3/25/93 placed a $\frac{1}{2}$ " iron monument on centerline of East-West road
DATE
and fence line North.

SKETCH OF REFERENCE TIES

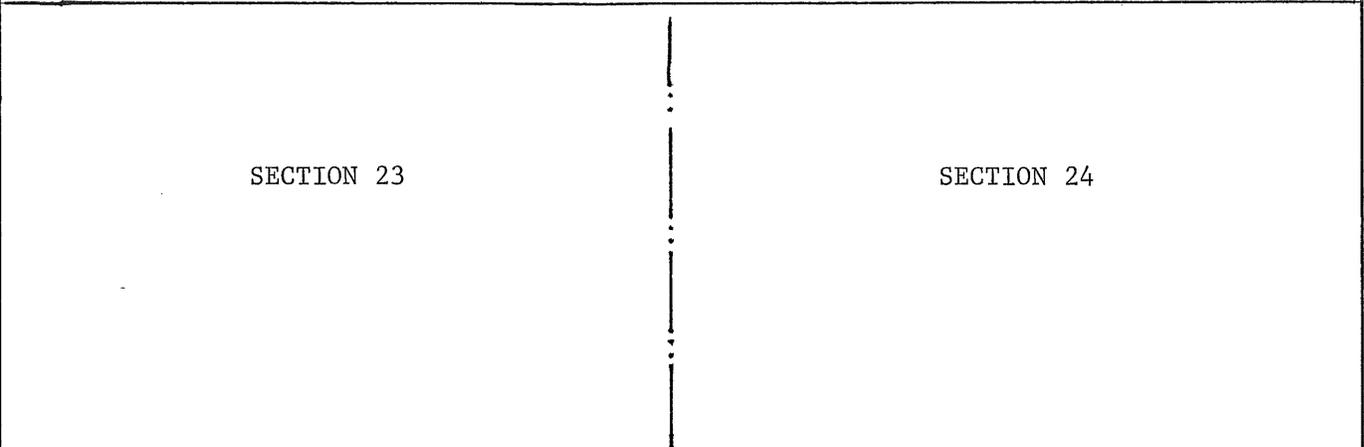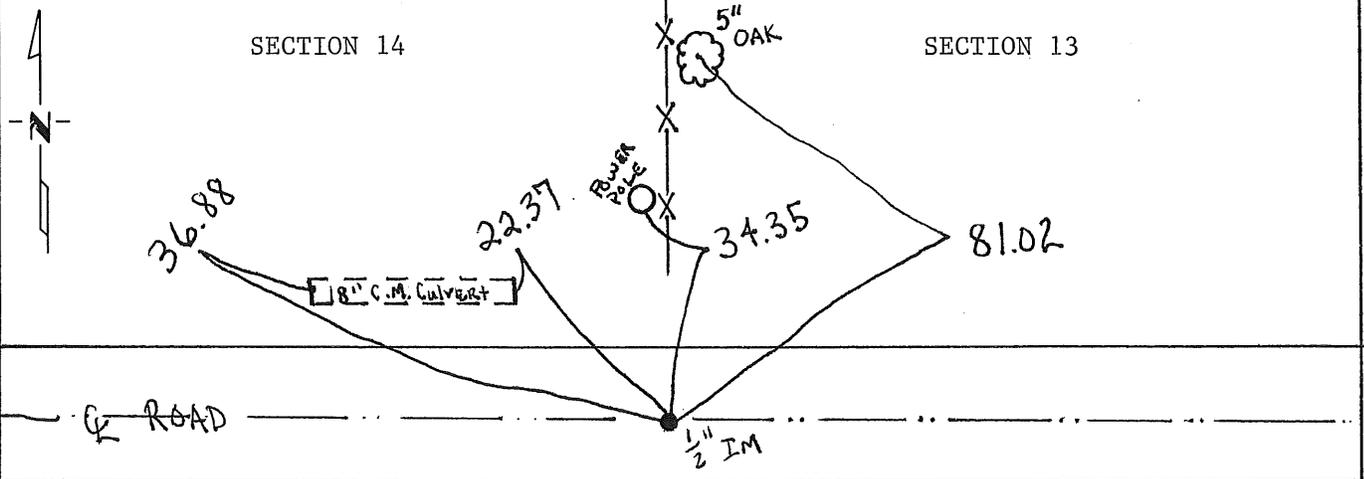

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David A. Regan 3/27/95
SIGNATURE DATE

Registration No. 12236

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

The G.L.O. survey was done in 1855 by Oscar Davis.

The County Surveyors records were searched with no reference to this corner.

On 3/93, Regan Land Surveyors, Inc. searched and dug the area and set a $\frac{1}{2}$ " iron monument on centerline of the road and fence line North.

231249

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

OCT 20 3 02 PM '95

ALICE G. ENGELMEYER
COUNTY RECORDER

BY *Maw* DEPUTY *xm*