

Certified, Filed and or Recorded on
Nov. 05, 2008 AT 08:37AM

Signed: M
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 24, Township 31N, Range 29W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 22 OCT 2008 found a PK NAIL & BENTON COUNTY WASHER

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

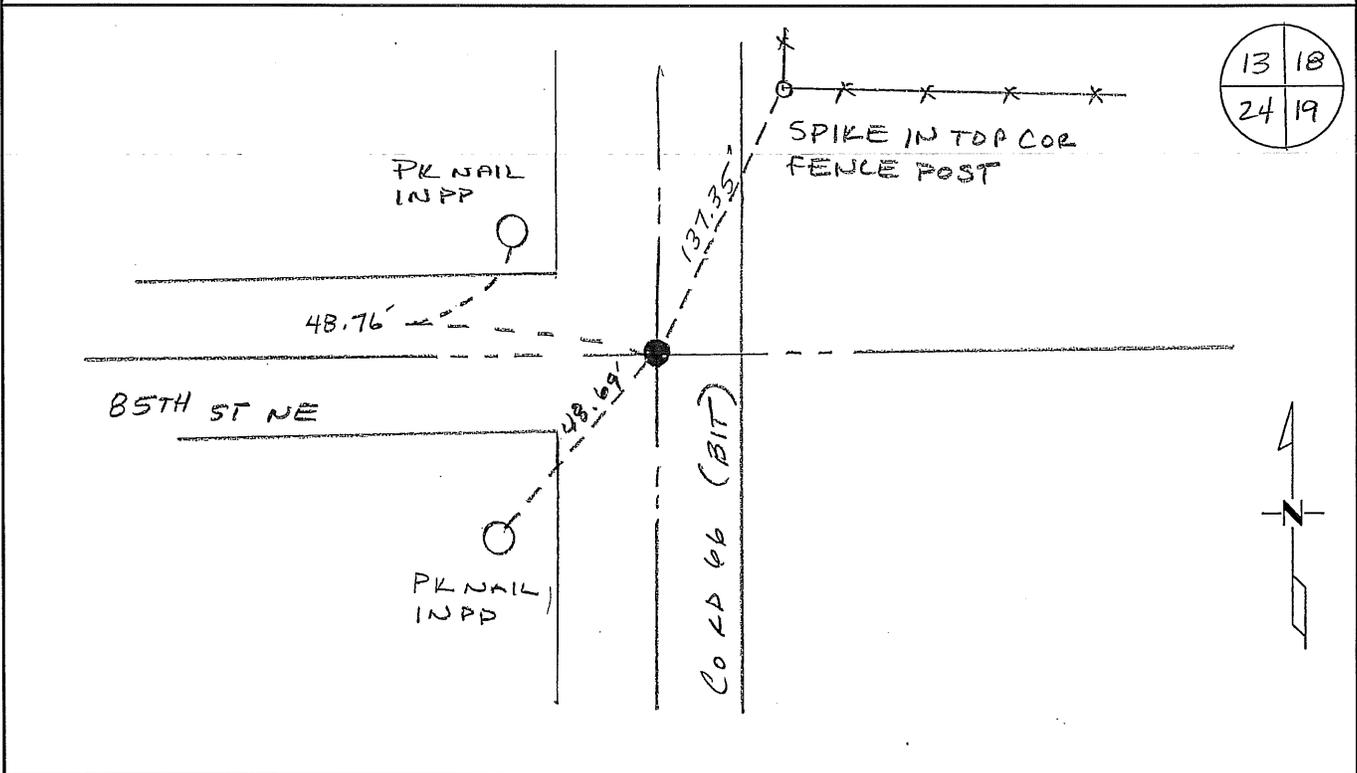

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oles
Deputy Benton County Surveyor
License No. 45872

Date: 11/04/2008

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872
 Page 1 of 2

Statement of Evidence:**H242**

Northeast Corner of Section 24, Township 37 North, Range 29 West, Gilmanton Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|-------------|----------|----------|
| 8" Elm | N 18 E | 40 links |
| 12" W Birch | N 42 W | 44 links |
| 8" Maple | S 51 E | 84 links |
| 12" W Birch | S 68 ½ W | 21 links |
- 1901 County Surveyor's Record Book A, Map No. 34, contains a survey of Section 13 by John Whilt, which shows this corner
- 1912 County Surveyor's Record Book 1, page 383 notes the following reference ties:
- | | | |
|----------|----------|-------|
| 16" Elm | N 51 ¾ E | 75' |
| 6" Maple | N 50 W | 50.3' |
- 1912 County Engineer's Notebook No. 2, pages 49 and 50, contain a road survey for SR No. 14 by M. J. Cleveland. Survey starts 928 feet north of this corner. Found old corner post and set iron monument with same ties as listed above.
- 1915 County Surveyors Record Book 2, page 420 and 421 note an Iron in the road.
- 1939 County Engineer's Notebook No. 131 contains survey of CAR 32 running south to north on township line and terminating at this corner. Corner is shown as spike in center of road with town road west and southwest. Ties:
- | | | |
|----|----|-------|
| PP | NE | 39.05 |
| TP | NW | 44.35 |
- 1941 County Engineer's Notebook No. 152 contains survey of CAR 32 running north on township line from this corner. Corner is shown as spike in center of road with town road west and southwest. Ties same as 1939.
- 1963 County Surveyor's Record Book 1, page 507, notes a 1" X 2" wood hub with the following reference ties
- | | | |
|----|----|-------|
| PP | NE | 39.05 |
| TP | NW | 43.65 |
- (Notation in County Engineer's Notebook No. 131 contains same ties with note "couldn't find - placed 1x 2 hub.")
- 1979 William Lunser, LS 9394, found a ¾" iron pipe at north/south/west centerline.
- 1988 William Lunser replaced the found ¾" iron pipe with a cast iron monument and filed a Certificate of Location (#191272). He notes a distance of 2295.16 feet to the North ¼ corner of Sec 19 in Maywood Township and a distance of 2659.82 feet to the East ¼ corner Sec 13.
- 1995 Comstock and Davis performed GPS work under contract with Benton County and Coordinates Obtained by GPS NAD 83 (1986 Adjustment) to a CIM:
 N- 148491.812
 E - 542413.139
- 2001 Westwood Professional Services, Inc. found a cast iron monument at centerline/centerline.

Benton County Surveyor's Office
Jason W. Oberg, Deputy County Surveyor
Minnesota License No. 45872

Page 2 of 2

- 2004 Westwood Professional Services, Inc. found CIM.
County Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N- 148492.041
E- 542412.773
- 2008 The County Surveyor's Office searched and found a PK nail with Benton County disk flush with the surface at the intersection of north-south bituminous road (County Road No. 66) and west road (85th Street N.E.). The position gives distances to the N ¼ corner of Section 19 and the E ¼ corner of Section 13 as 2294.76 feet and 2659.84 feet respectively, which agrees with Lunser's 1988 reported distances to same of 2295.16 feet and 2659.82 feet. Surveyor accepts position and updated ties. Coordinates obtained agree with those reported in 2004 above.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 24, Township 37, Range 29, 4th P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 9-19-79 found a 3/4" iron pipe
DATE

left monument as found, lowered monument, removed monument (explain)

On 12-8-88 placed a Benton County Cast Iron Monument
DATE

SKETCH OF REFERENCE TIES

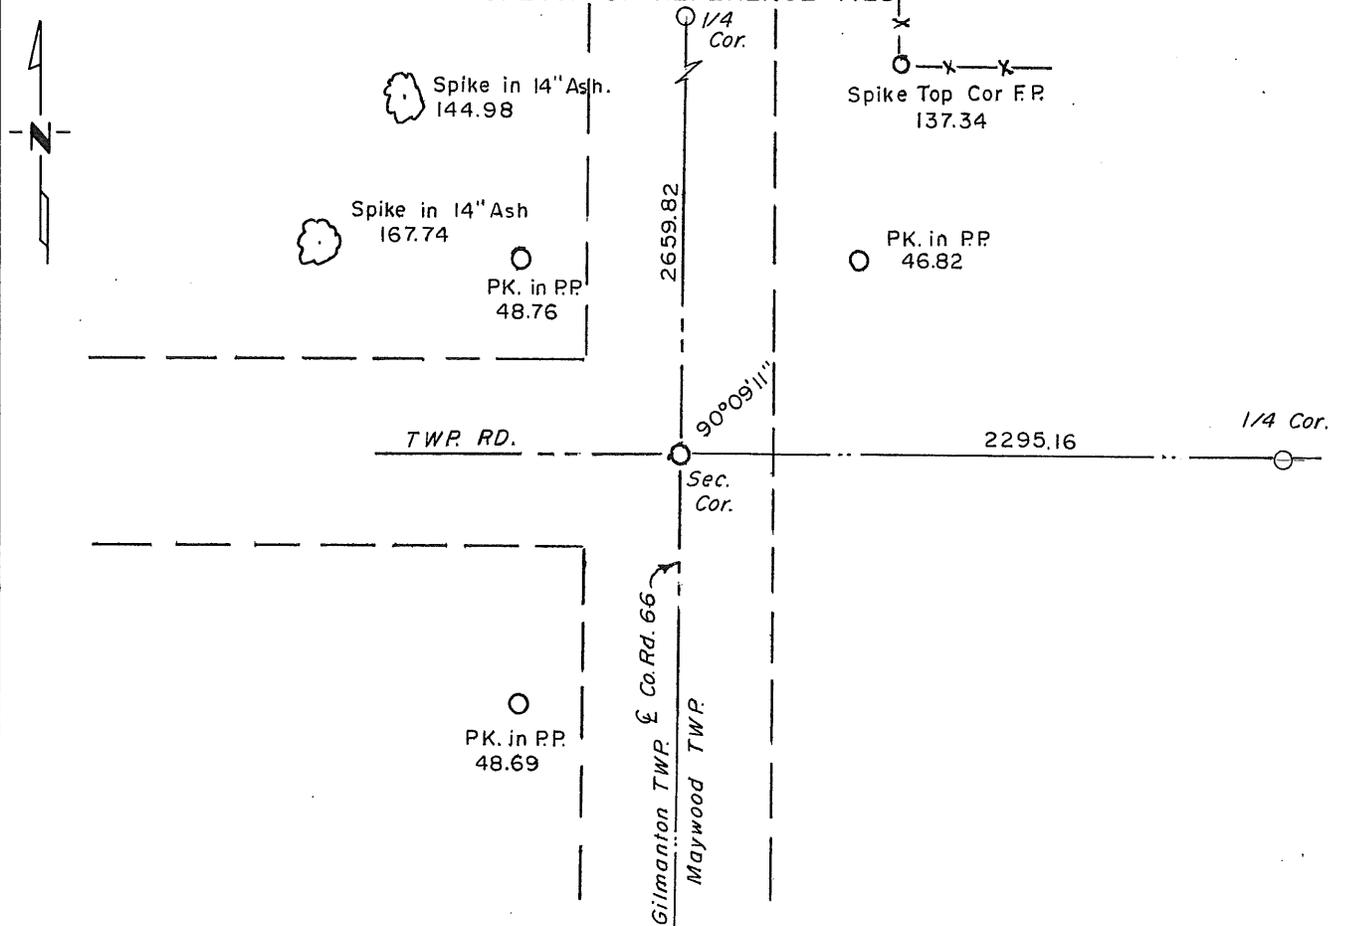

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Lerner 12/15/88
SIGNATURE DATE

Registration No. 9394

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

9-19-79 Found a 3/4" iron pipe at the centerline of two roads, north-south and west also a fence line to the east. Measurements to the north and east verified this location.

12-8-88 Located 3/4" iron pipe as found in 1979 and on top of it at the road surface a railroad spike. Verified measurements taken in 1979 and placed a Cast Iron Monument over the 3/4" iron pipe.

191272

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 12 09 PM '89

ALICE C. ENGELMEYER
COUNTY RECORDER

BY Jed DEPUTY