

MARILYN J. NOVAK  
COUNTY RECORDER  
BY Marilyn J. Novak DEPUTY

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

298886

2003 MAY -5 P 1:54

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 25, Township 37 N, Range 29 W  
4th Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 5/31/2002 found a RR Spk flush and a 1" I. Pipe down 1.5' in old bit. roadbed  
DATE

left monument as found     lowered monument     removed monument (explain)

On 5/31/2002 placed a Benton County Cast Iron Monument down 0.3'  
DATE

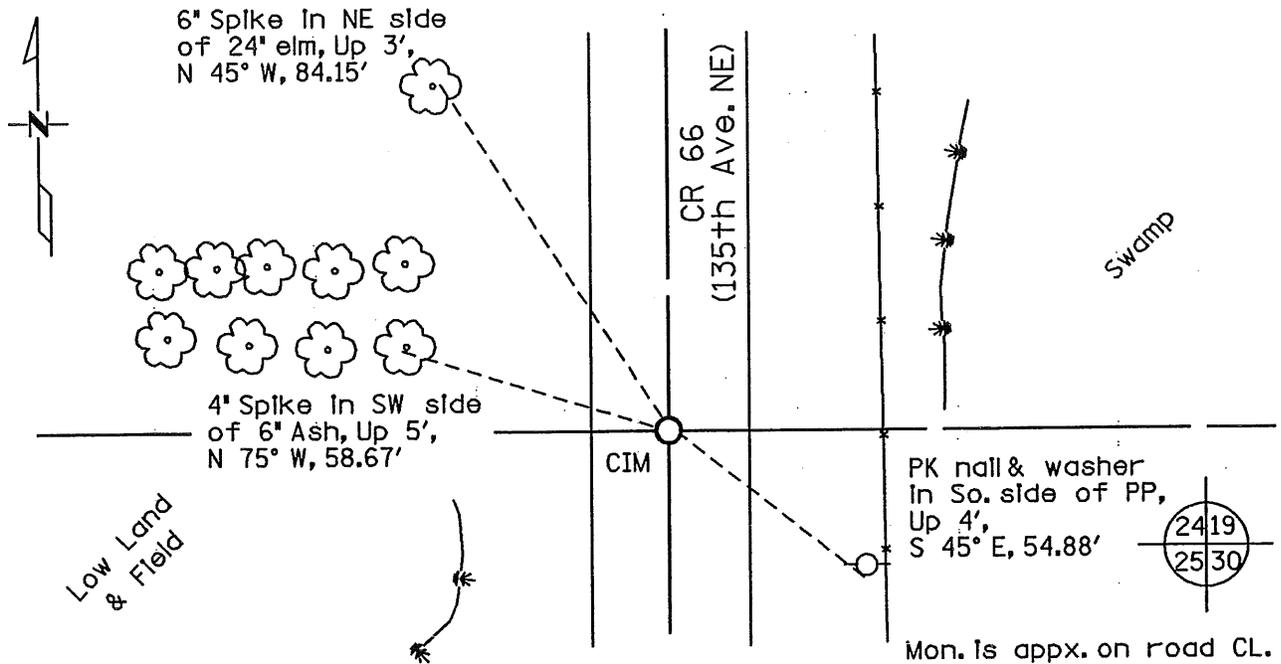

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature Samuel J. DeLoe Date 3-31-2003 License No. 40341

Title:  Land Surveyor     Professional Engineer     County Surveyor     County Engineer

Statement of Evidence

Northeast Corner of Section 25, Twp. 37 N, Rng. 29 W  
4<sup>th</sup> P.M., Benton County, Minnesota

In 1849 during the original U.S GLO, a wood post was set at this location and bearing trees were recorded as follows:

8" Blk Ash	N 29 ½ E	52 links
12" Blk Ash	N 43 W	16 links
12" Blk Ash	S 30 W	40 links
8" blk Ash	S 50 ½ E	18 links

A line tree was noted as a 6: Basswood South 19.52 chains and a 12 " W Oak north 18.46 chains.

In 1951 Mn/DOT noted on a highway alignment map that the corner was assumed in the center of north-south road and fence line west with the corner being 1390.8 feet north of centerline.

In 1963 the County Surveyors records in Book 1, page 509 note that a found fence post was replaced with an iron with the following reference ties:

PP	SE	54.4
FP	NE	37.15
TP	NW	47.05

On April 23, 1990 Paul Wellen & Associates, Inc. found a railroad spike in the centerline of Benton County Road 66 opposite a fence line to the west. They accepted the location of this monument as the corner, made reference ties and filed a Certificate of Location, Document No. 199550, in Benton County.

In 2001 Westwood Professional Services, Inc. found a railroad spike at the centerline of a north-south road and a fence line west.

On May 31, 2002, Sam DeLeo, R.L.S., found a railroad spike, flush, marking the corner in accordance with Wellen's reference ties. The location was hand excavated and also found was a 1-inch diameter iron pipe down 1.5 feet in the old bituminous roadbed. Both monuments were removed and a Benton County cast iron monument was set in place of the 1-inch diameter iron pipe. Reference ties were recorded and a Certificate of Location of Government Corner was made.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 25, Township 37, Range 29, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On APRIL 23, 1990 found a RAILROAD SPIKE  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

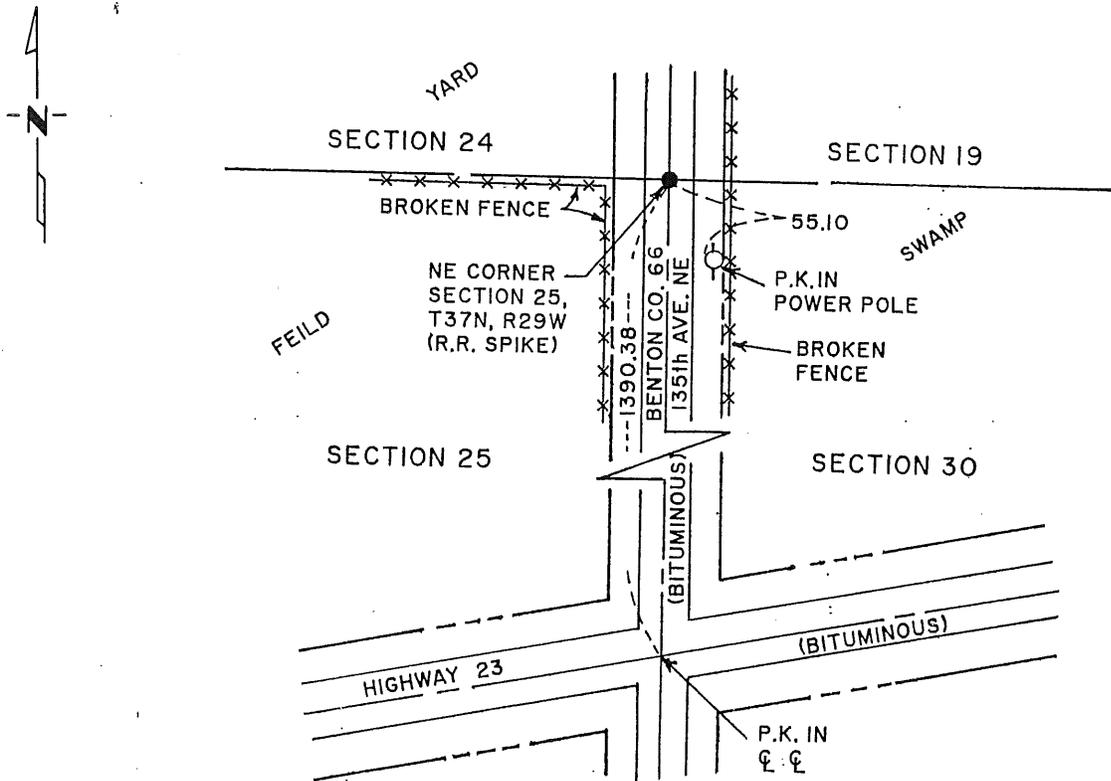

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sam J. Miller 7/30/90  
SIGNATURE DATE

Registration No. 10461

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

Northeast corner, Section 25, Township  
37 North, Range 29 West, 4th Principal Meridian.

1. During the G.L.O. Survey of 1855, Mr. Oscar F. Davis, a U.S. Deputy Surveyor set a wood post to mark this corner.
2. A search of the Benton County Surveyor's records indicate that an iron was found at this location in 1963. No certificate of location was filed.
3. On April 23, 1990, Paul E. Wellen & Associates, Inc. found a railroad spike in the center line of Benton County Road 66 opposite a fence line to the west. We accepted this railroad spike as the corner. We also established new reference ties as indicated.

199550

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

SEP 27 11 30 AM '90

ALICE C. ENGELMEYER  
COUNTY RECORDER

*Alice C. Engelmeier*  
BY