

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 26, Township 37 N, Range 29 W, 4 TH P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On AUG 15, 1988 found a 1 1/2" IRON PIPE, UP 1.0± WITH AN OLD JACK STAND ON THE IRONS SIDE
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

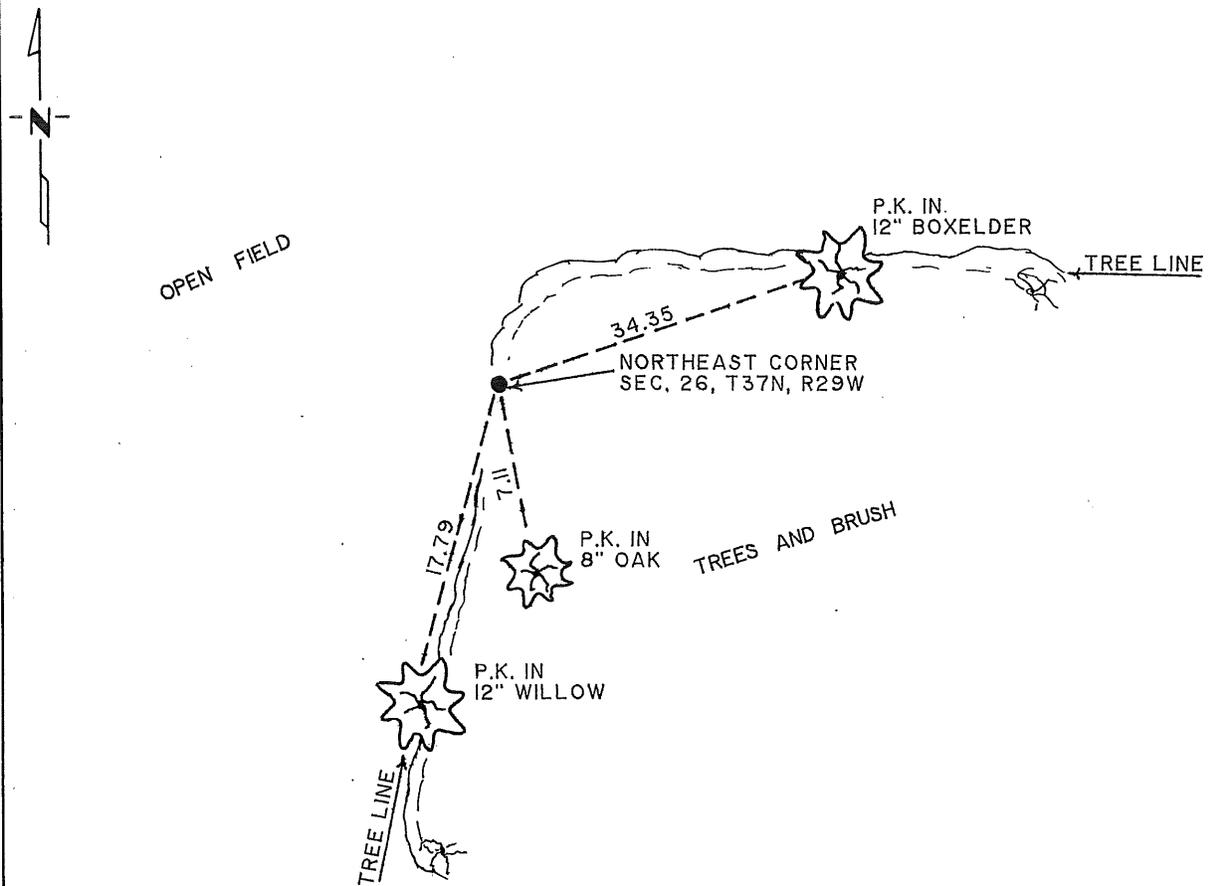

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Johnston SIGNATURE 12-28-88 DATE

Registration No. 17768

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

NORTHEAST CORNER, SECTION 26, T37N, R29W, 4TH P.M.

1. During the G.L.O. Survey of 1855, Mr. Oscar F. Davis, a U.S. Deputy Surveyor, set a wood post to mark this corner.
2. Benton County's old surveyor's books provided no information to relocate said corner.
3. On August 15, 1988, Paul E. Wellen & Associates Inc., found a 1 1/2 inch iron pipe up 1 foot, we also found an old jack stand lying next to said iron pipe at the location of said corner. We accepted this as the position of said corner and established reference ties as indicated.

19 | 333

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 20 9 04 AM '89

ALICE G. ERBELEMEIER
COUNTY RECORDER

BY Alc DEPUTY