

Certified, Filed and or Recorded on
Oct. 14, 2008 AT 10:17AM

Signed: CK
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 2, Township 36N, Range 28W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10/09/08 found a PK NAIL WITH BENTON COUNTY SURVEYOR DISK

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

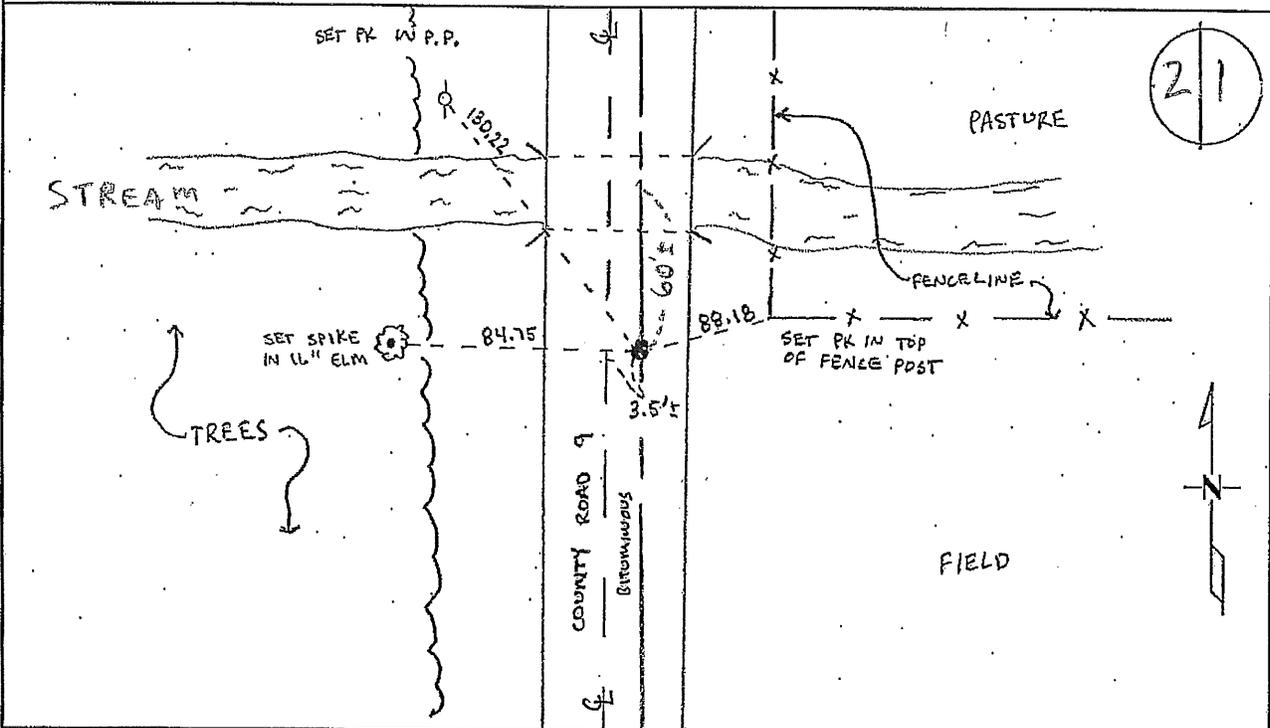

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Olney
Deputy Benton County Surveyor
License No. 45872

Date: 10-13-2008

PAGE 1 OF 2

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**J023**

The East Quarter Corner of Section 2, Township 36 North, Range 28 West, Glendorado Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|--------|------------|----------|
| 8" Elm | S 45 1/2 W | 25 links |
| 7" Ash | S 22 E | 46 links |
- 1900 County Surveyor's Record Book 1, page 9, and County Surveyor's Record Book A, Map No. 39, shows John Whilt did a survey of Section 1. He notes a distance of 48.12 chains (3175.92 feet) to the NE Cor Sec 2 and a distance of 39.46 chains (2604.36 feet) to the SE Cor Sec 2.
- 1930 County Surveyor's Record Book 2, page 11, notes a spike in the centerline of road as noted on a J.P. Soderstrum survey, on 10-12-16. This spike has a delta of 55 minutes right going from the NE corner to the SE corner of said section. Reference ties to the spike are.
- | | |
|------------------|-------|
| SW Corner bridge | 46.60 |
| SE Corner bridge | 46.70 |
- 1930 County Engineer's notebook No. 58 shows road survey by H. G. Elletson running north to south. Corner is shown same as above. Stationing gives distances of 3177.1 feet to the NE corner and 2612.7 feet to the SE corner with a delta angle of 0-55' right.
- 1979 On August 9, 1979, Paul Wellen, LS 10461, set a cast iron monument using existing reference ties from Benton County. The location fits with the proportionate measurement between the NE and the SE corners of said Section 2, according to a 1900 survey recorded in the Benton County Surveyor Books. A Certificate of Location (#155137) was filed. The following distances were noted: 2616.37 feet to the SE Corner of Section 2 and 3176.71 feet to the NE Corner of Section 2.
- 2002 Westwood Professional Services, Inc. searched corner area, but found no monument. By GPS, we measured 5793.10 feet between section corners. Analysis of proportion measurement from 1900 survey (39.46/87.58) would put the corner 2610.14 feet north of the SE corner, which would be 6.23 feet south of the 1979 Wellen position. Using 1930 highway information puts the corner 3179.01 feet and 2614.27 feet from the section corners with a delta angle of 0-54-59.
 County Coordinates Computed Based on 1930 Co. Hwy. Stationing.
 NAD 83 (1996 Adjustment)
 N-129596.583
 E-568746.425
- 2008 The County Surveyor's Office searched the area and found a PK Nail flush with the bituminous road (County Road No. 9) at 3.5 ft.± east of centerline at the position reported above by Westwood Professional Services, Inc. in 2002. A lost position, proportioned to 1900 measurements would place the corner 21.9 ft. west and 4.05 ft. south of the 1930 Hwy Position, which would be clear of the highway occupation. The Surveyor accepts the method as outlined by Westwood, above, as marking the obliterated position as it appears to be in harmony with both the 1900 survey and the 1930 Co. Hwy Survey. Left monument in place and made ties. Coordinates obtained by GPS agree with those reported by Westwood Professional Services, Inc. in 2002.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 2, Township 36, Range 28, _____ P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 8-8-79 found a _____ was evidenced by reference ties from Benton County records. This location fits with proportionate measurement between _____
- left monument as found, lowered monument, removed monument (explain) _____
- On 8-8-79 placed a permanent marker consisting of Benton County Cast iron Monument.

SKETCH OF REFERENCE TIES



Refer to next page

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Kellen
SIGNATURE _____ DATE _____

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 9 a. M. on the 1st day of February A.D., 19 80


Register of Deeds F. Q. Johnson
By _____, Deputy

DOCUMENT NO. 155137

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 8th day of August, 1979
 I did set the East Quarter corner of Section 2,
 Twp. 36, Rg. 28, Benton County, Minnesota, which
 was evidenced by Reference ties from Benton County records. This location
fits with the proportionate measurement between the northeast and southeast
corners of said Section 2, according to a 1900 A.D. survey recorded in the
Benton County Surveyor Record Books.

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of Benton County Cast Iron Monument and that
 I did establish witness or reference monuments as shown below:

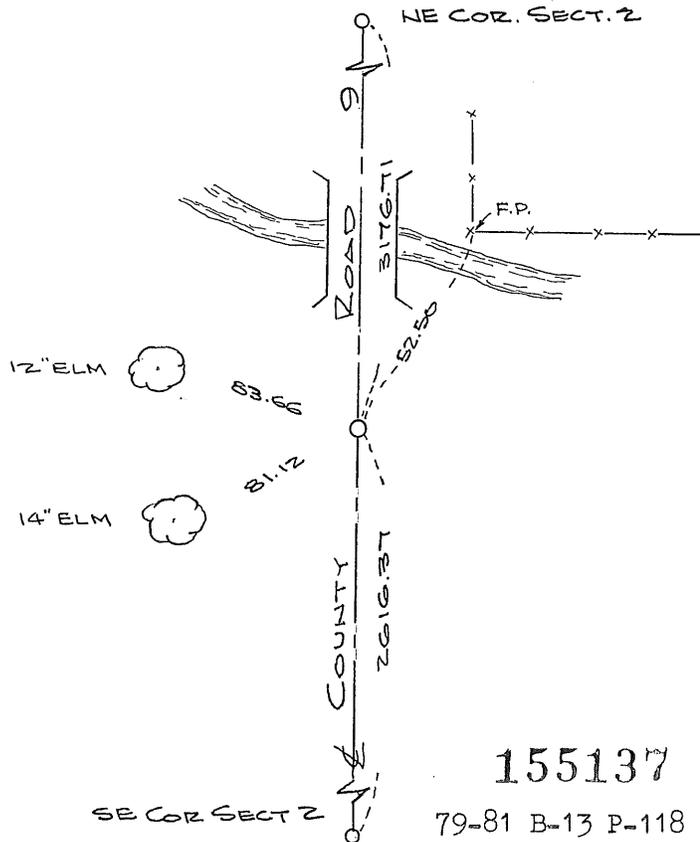

155137

79-81 B-13 P-118

I hereby certify that the above
 is true and correct and that I am
 a registered Land Surveyor under
 the laws of the State of Minnesota.

Lucy Miller

Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
 was filed for record in this office on the
1st day of February, 1980
 at 9 #.M.

F.A. Johnson
 County Recorder

By _____ Deputy.