

Certified, Filed and or Recorded on
Oct. 07, 2008 AT 02:44PM


Signed: BW
MARILYN J NOVAK
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 3, Township 36N, Range 28W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/01/08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

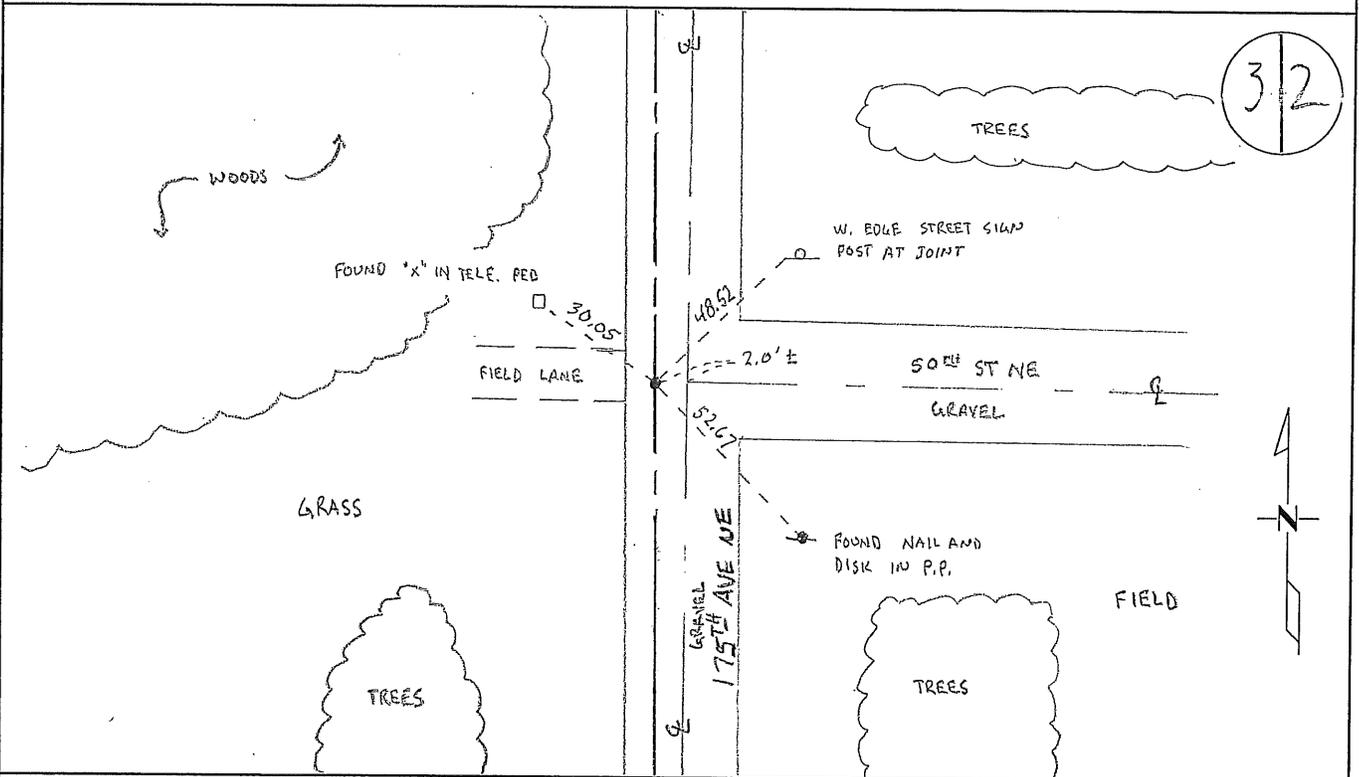

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Ozy
Deputy Benton County Surveyor
License No. 45872

Date: 10/06/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**J033**

The East Quarter of Section 3, Township 36 North, Range 28 West, Glendorado Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked by set a wood post at this location and bearing trees were recorded.

10" Blk Ash	S 77 E	24 links
9" Blk Ash	N 74 W 36 links	

1916 County Surveyor's Record Book 1, page 13, shows survey by J.P. Soderstrum. He notes a stake at the corner with the following reference ties:

12" Elm	N 28-15 E	189
14" Elm	S 48 E	15 1/2
9" Ash	S 87-15 W	121

He notes a distance of 49.91 chains (3294.06 feet) to the NE corner Sec 3 and a distance of 81.22 chains (5360.52 feet) to the West ¼ corner Sec 3 and a distance of 39.40 chains (2600.40 feet) to the SE corner Sec 3.

1939 County Engineer's Notebook No. 123 contains survey of CAR 39 running south to north on section line. No corner is shown, but stationing gives distances of 2588.5 feet to the SE corner and 3295.2 feet to the NE corner with no angle to center of town road east and fence line west.

1979 Paul Wellen, LS 10461, set a cast iron monument at the corner location according to the centerline intersection of roads east/north/south. This location fits with distances from the NE Cor Sec 3 from a 1916 survey. He filed a Certificate of Location (#155139) and notes a distance of 2588.66 feet to the SE corner Sec 3 and a distance of 3293.08 feet to the NE corner Sec 3.

2003 Westwood Professional Services, Inc. found cast iron monument and obtained coordinates by GPS. Distances to section corners supports the corner being the obliterated position as found by Soderstrum in 1916.

County Coordinates by GPS to CIM
 NAD 83 (1996 Adjustment)
 N- 129439.620
 E- 563498.500

Distance to NE corner = 3293.04

Distance to SE corner = 2588.65

2008 The County Surveyor's Office searched and found a cast iron monument as set by Wellen in 1979. Distance to the NE Cor. gives 3293.04 ft (49.89 ch.) which agrees with Soderstrom's 1916 distance of 3294.06 ft. (49.91 ch.). Position agrees with the obliterated position from Soderstrom's 1916 survey and is accepted as the best evidence. GPS coordinates measured matched those reported above by Westwood in 2003.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I did set East Quarter Corner of Section 3, Township 36, Range 28, _____ P.M.


STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch: was evidenced by the centerline intersections of a township road to the east and County Road No. 67. This locattio
 On _____ found a _____ fits the distance from North-east corner of sai
section 3, according to the Benton County Surveyors Records of a 1916 A.D
Survey.

left monument as found, lowered monument, removed monument (explain)

On _____ placed a permanent marker consisting of Benton County
Cast Iron Monument.

SKETCH OF REFERENCE TIES

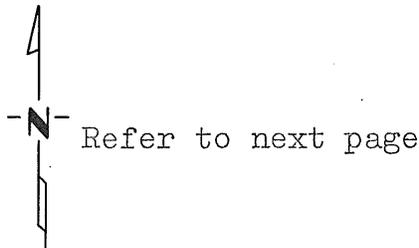

Statement of evidence relative to this corner location is on back of page. 79-818-13 P. 118

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Hallen
SIGNATURE _____ DATE _____

Registration No. 10461

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 9 A.M. on the 1st day of February A.D., 1980


Register of Deeds F. G. Johnson
By _____, Deputy

DOCUMENT NO. 155139

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 22 day of August, 1979
 I did set the East Quarter corner of Section 3,
 Twp. 36, Rg. 28, Benton County, Minnesota, which
 was evidenced by the centerline intersections of a township road to the
east and County Road No. 67. This location fits the distance from the north-
 east corner of said Section 3, according to the Benton County Surveyors Records
 of a 1916 A.D. survey.

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of Benton County Cast Iron Monument and that
 I did establish witness or reference monuments as shown below:

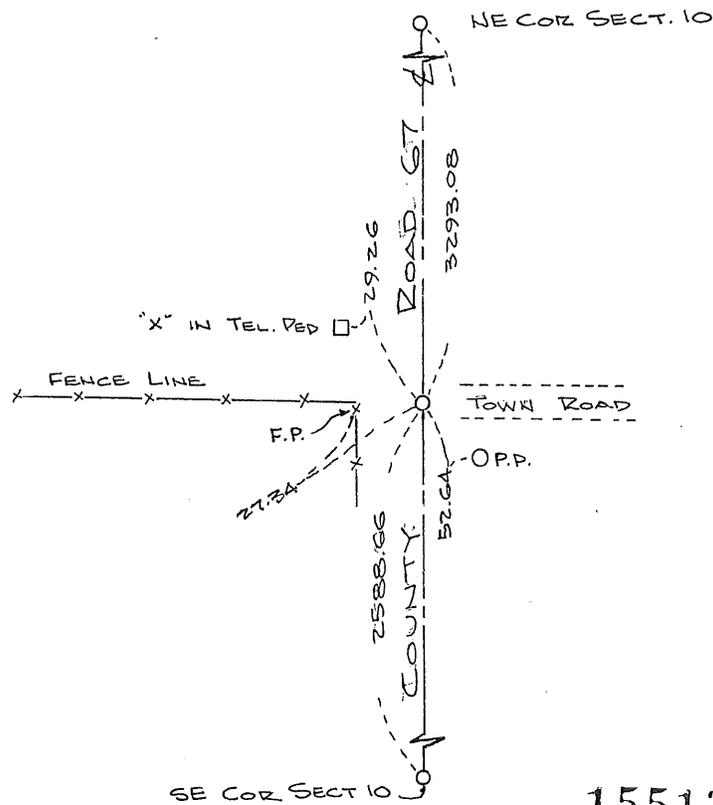

155139

79-81 B-13 P-118

I hereby certify that the above
 is true and correct and that I am
 a registered Land Surveyor under
 the laws of the State of Minnesota.

Paul Miller

Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
 was filed for record in this office on the
1st day of February, 1980.
 at 9 A.M.

F.A. Johnson
 County Recorder

By _____ Deputy.