

Certified, Filed and or Recorded on
Sep. 23, 2008 AT 01:21PM

Signed: BW
MARILYN J NOVAK E V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER




EAST QUARTER Corner of Section 10, Township 36N, Range 28W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 9/22/08 found a 1/2" IRON PIPE LS NO. 40341

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

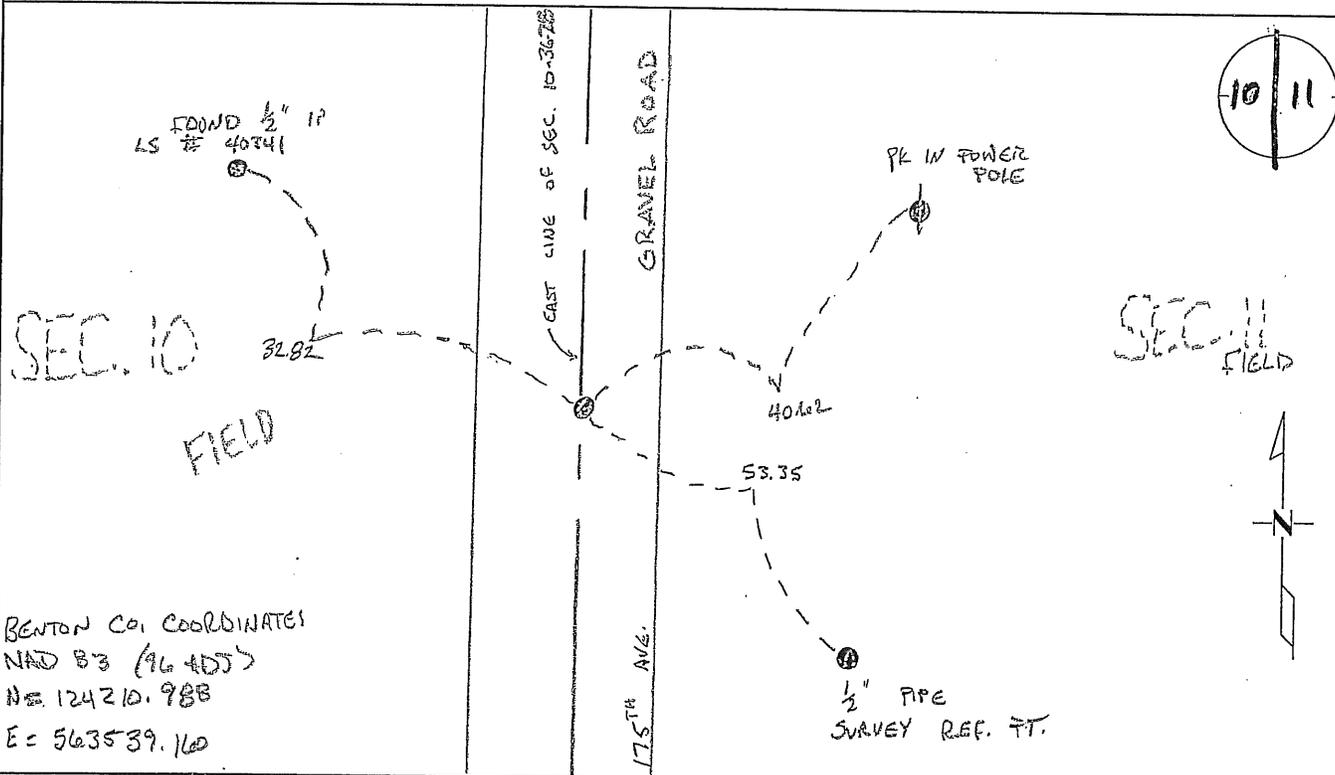

BENTON CO. COORDINATES
NAD 83 (96 405)
N = 124210.988
E = 563539.160

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Oly
Deputy Benton County Surveyor
License No. 145872

Date: 9/22/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

J103

The East Quarter Corner of Section 10, Township 36 North, Range 28 West, Glendorado Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post with bearing trees noted as:

6" Ash	S 29 ½ W	12 links
10" W Birch	N 15 ¾ W	13 links

1902 County Surveyor's Record Book 1, page 29, and Record Book A, Map No. 41 contains a survey of Section 11 by John Whilt. He notes a distances of 39.95 chains (2636.7 feet) to the NE and SE corners. (Indicates that corner could have been set lost.)

1939 County Engineer's Notebook No. 123 contains survey of CAR 39 running south to north on section line. Corner is shown as an iron in center of road with fence line east. Ties:

14" W. Oak	NW	49.75'
14" Elm	NE	96.95'

Stationing gives distances of 2636.1 feet to the SE corner and 2640.4 feet to the NE corner with delta angle of 1-30' right.

2008 The Benton County Surveyor's Office searched and found a ½" iron pipe capped "RLS 40341" as set by Samuel Deleo. Location gives 2640.84 ft. to the NE Cor. of Sec. 10 and 2636.43 ft. to the SE Cor. of Sec. 10, with a deflection of 1°31'20" right. This agrees very close to the 1939 survey and is accepted as the best evidence.

Benton County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-124210.988
 E-563539.160

2/18/2003

9/22/2008