

Certified, Filed and or Recorded on  
Oct. 07, 2008 AT 02:51PM

Signed: BW  
MARILYN J NOVAK ✓ ✓  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 22, Township 36, Range 28  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 09/29/08 found a CAST IRON MONUMENT

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

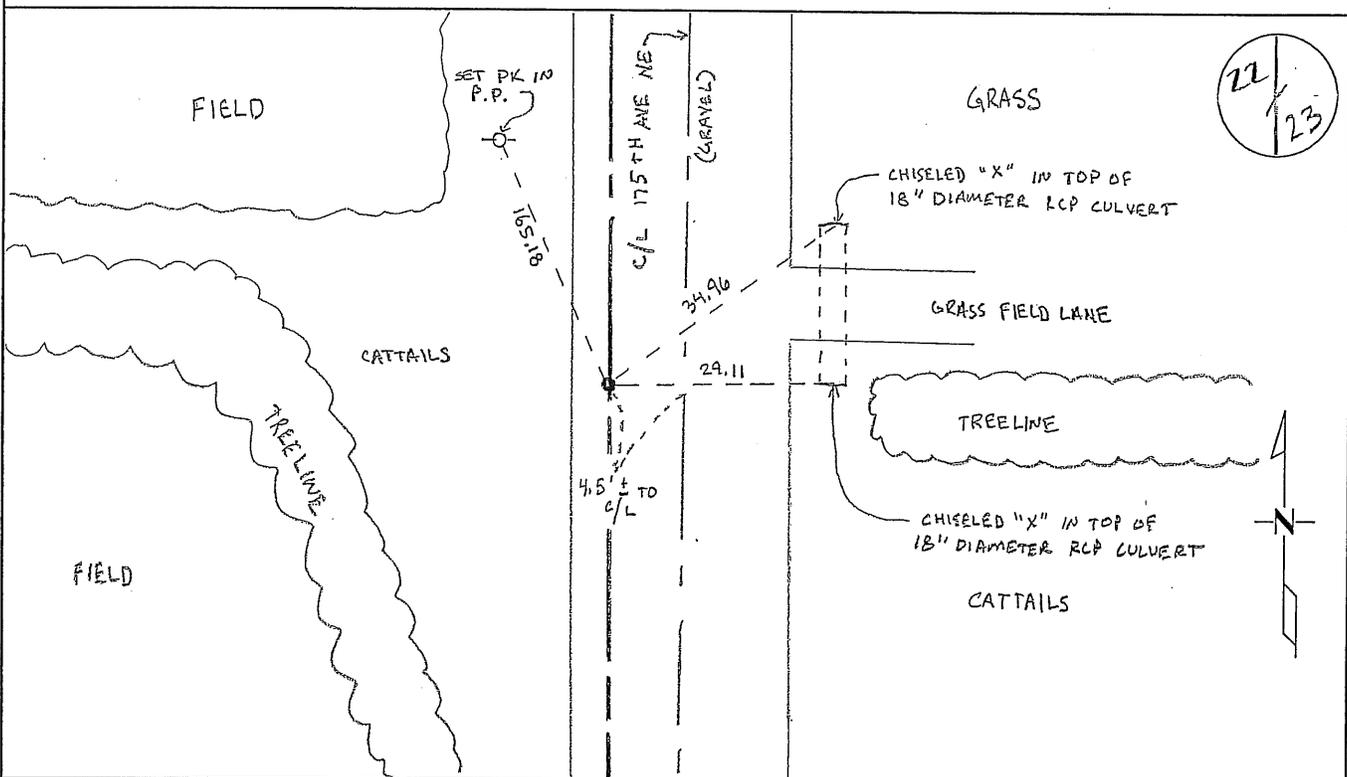

22  
23

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Car W. Oly  
Deputy Benton County Surveyor  
License No. 45872

Date: 10/06/08

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

**J223**

The East Quarter Corner of Section 22, Township 36 North, Range 28 West, Glendorado Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as:

10" Ash	N 41 E	146 links
9" Ash	N 5 ½ W	209 links

Undated Roll E-4, of the MN/DOT Highway plans for TH 95, show the corner is marked by an iron monument and is 2683.7 feet from the NE corner Sec 27.

1914 County Surveyor's Record Book 1, pages 53-54, and Record Book A, Map No. 19, notes a survey of Section 23 by JP Soderstrum. He notes a distance of 40.65 chains (2682.90 feet) to the NE and SE corners Sec 22. He also notes a fence line east 12 links north and he set a stake equidistant and on true line.

1926 County Surveyor's Record Book 1, pages 51 and 52, and Map No. 48 contains a survey of Section 22 by Harry Elletson. (Notes in Notebook 48) Elletson notes a post at the corner as set by Soderstrum and a distance of 2682 feet to the NE and SE corners of Sec 22.

1939 County Engineer's Notebook No. 123 contains survey of CAR 39 running south to north. Corner is shown as a hub set in center of road with fence lines east and west. Gives a distance of 2683.3 feet to the NE corner.

2008 The County Surveyor's Office searched and found a cast iron monument approximately 5 ft. west of centerline. Position falls 2683.70 ft. south of the NE corner and 2684.48 ft. north of the SE corner. These distances agree with the above mentioned surveys and plans. The Surveyor accepted the cast iron position and set new ties.

County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-113649.846  
 E-563797.410