

Certified, Filed and or Recorded on
Sep. 23, 2008 AT 01:23PM


Signed: BW
MARILYN J NOVAK V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 26, Township 36 N, Range 28 W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 09/17/08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

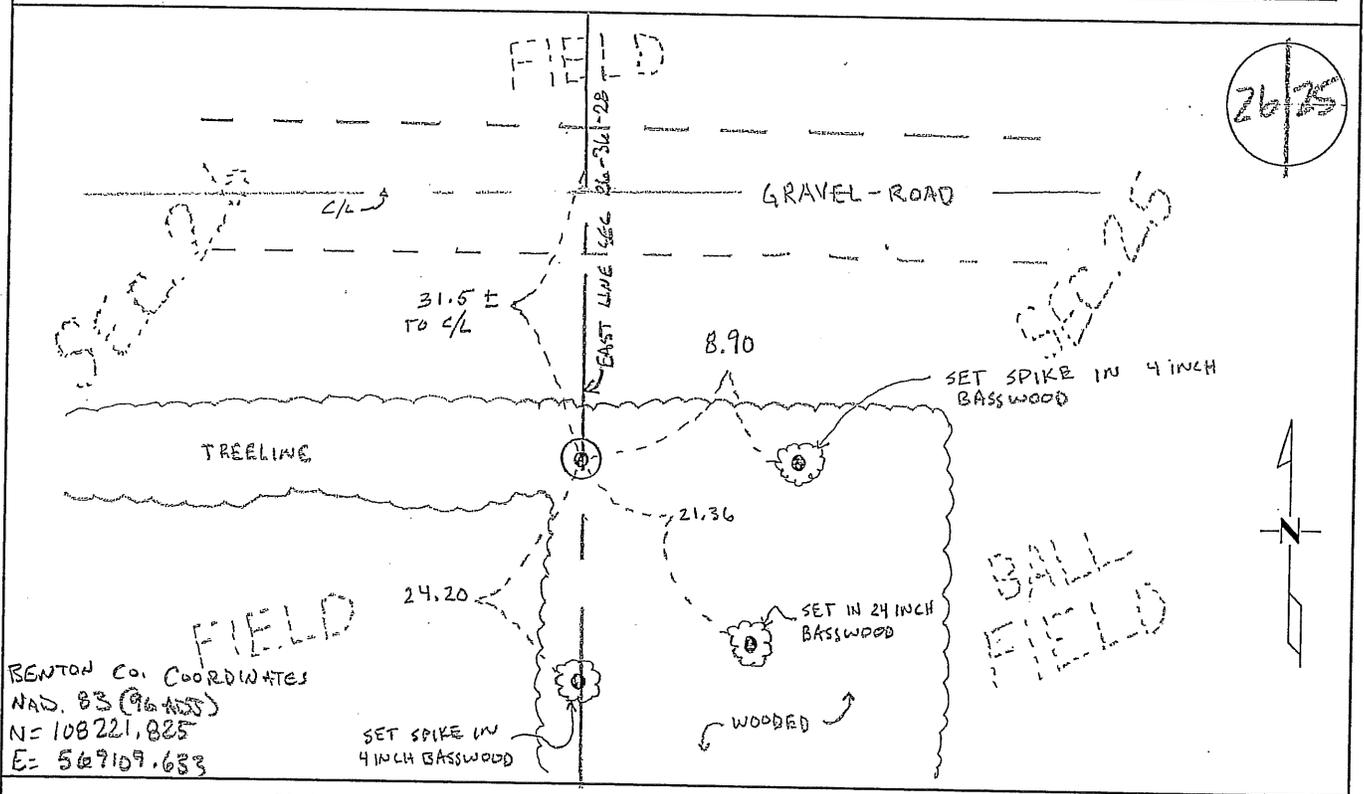

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jean W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 9/22/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

J263

The East Quarter Corner of Section 26, Township 36 North, Range 28 West, Glendorado Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as:
- | | | |
|-------------|--------|-----------|
| 16" Bur Oak | N 43 E | 282 links |
| 11" Bur Oak | N 42 W | 248 links |
- 1914 County Road Book, pages 127 to 130, shows a survey for State Road No. 8 which intersects the section line 842 feet south of the East ¼ corner of Section 26.
- 1979 John Oliver, LS 8194, reestablished the corner on an east/west fence line and on a straight line between the SW corner of Sec 26 to a fence corner ¼ mile north of the corner. This position fits well with the lines of occupation and old survey distances. He set a cast iron monument and filed a Certificate of Location (#155685).
- 2008 The Benton County Surveyor's Office searched and found John Oliver's cast iron monument from 1979. Position agrees with occupation and distances to the NE corner and SE corner agree with a Paul Wellen survey (undated) that show 2680.87 to the NE corner and 2679.12 ft to the SE corner. The Benton County Surveyor's Office measured 2681.08 ft. and 2678.92 ft., respectively. Accepted cast iron monument as the best evidence and updated ties from Oliver's Certificate of Location from 1979.

Benton County Coordinates obtained from GPS
 NAD 83 (1996 Adjustment)
 N-108221.825
 E-569109.633

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

the East Quarter _____ Corner of Section 26, Township 36, Range 28, _____ P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch: Reestablished on a East and West fence line and its intersection with a straight line

On 11-16-79 found a _____ of said section to a fence corner $\frac{1}{4}$ mile North of this corner. This position fits testified to lines of occupation and compares favorably with old survey distances

left monument as found, lowered monument, removed monument (explain)

On 11-16-79 placed a Benton County cast iron monument and 3 references. DATE

SKETCH OF REFERENCE TIES



REFER TO NEXT PAGE

Statement of evidence relative to this corner location is on back of page. #155685

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Oliver April 9, 1980
SIGNATURE DATE

Registration No. 8194

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 4 P: .M. on the 4th day of April A.D., 19 80
County Recorder

Register of Deeds h.a. Johnson
By _____, Deputy

DOCUMENT NO. 155685

Statement of Evidence:

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


BENTON COUNTY

No. _____

I hereby certify that on the 16th day of November, 19 79, that I John O. Oliver
restore the East Quarter corner of Section 26, Township 36, Range 28
said County, which was Evidenced by on a East and West fence line and its intersection with a straight
Reestablished by of this corner.
line from the Southwest corner of said Section to a fence corner 1/4 mile North. This position fits
testified to lines of occupation and compares favorably with old survey distances.

I further certify that to perpetuate the location of said corner I did at the exact location thereof place
a permanent marker consisting of a Benton County cast iron monument

further certify that I did establish 3 references or witness monuments as shown below. Said references
being marked as shown by the following abbreviations: (BP = Tree with I facing painted blaze with I nail in the lower blaze.
V = Tree, pole, etc. not blazed but with I. nail in face. CF = Corner of foundation of building. CS = Corner of siding of building.)

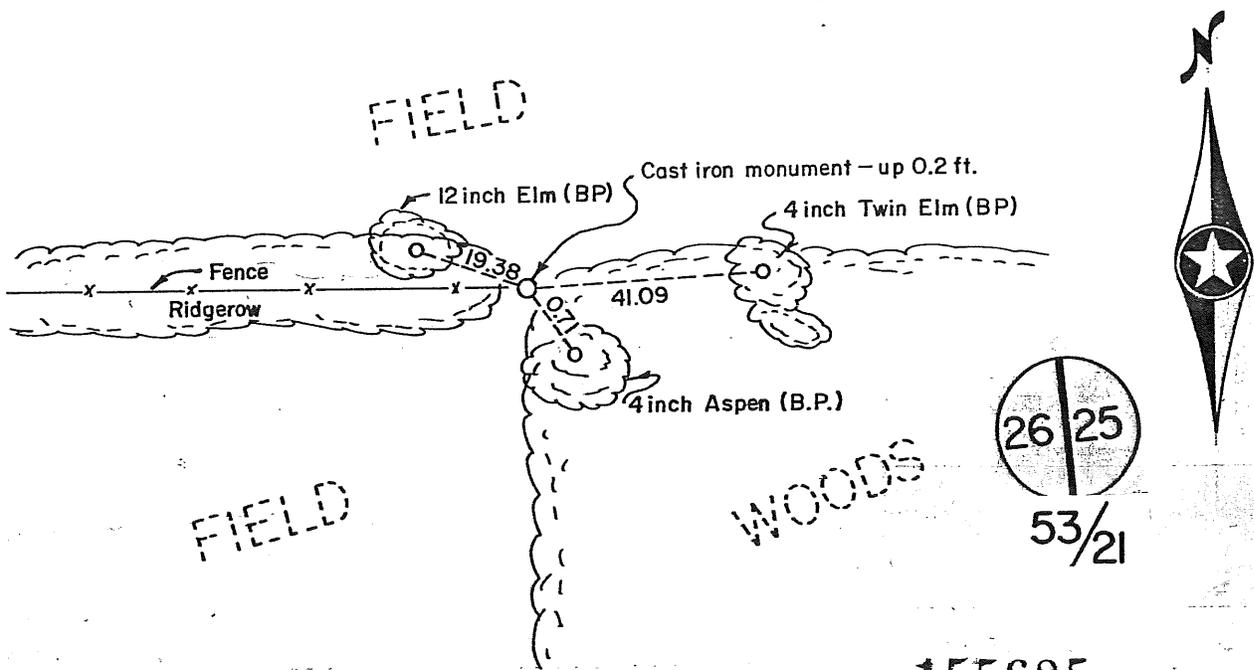

155685

County Recorder

Office of the Register of Deeds for said County:

Dated this 9th day of April, 19 80.

John O. Oliver

Registered Land Surveyor No. 8194

County Surveyor

Deputy Co. Surveyor

I hereby certify that the within instrument was
filed for record on the 14 day of April
19 80, at 4 P.M.

F.A. Johnson
Register of Deeds County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


BENTON COUNTY

No. _____

I hereby certify that on the 16th day of November, 1979, that I John O. Oliver and restored the East Quarter corner of Section 26, Township 36, Range 28 said County, which was ~~Evidenced by~~ Reestablished by _____ on a East and West fence line and its intersection with a str _____ of this corner, line from the Southwest corner of said Section to a fence corner 1/4 mile North. This position testified to lines of occupation and compares favorably with old survey distances.

I further certify that to perpetuate the location of said corner I did at the exact location thereof place a permanent marker consisting of a Benton County cast iron monument

I further certify that I did establish 3 references or witness monuments as shown below. Said references being marked as shown by the following abbreviations: (BP = Tree with I facing painted blaze with I nail in the lower blaze. N = Tree, pole, etc. not blazed but with I. nail in face. CF = Corner of foundation of building. CS = Corner of siding of building.)

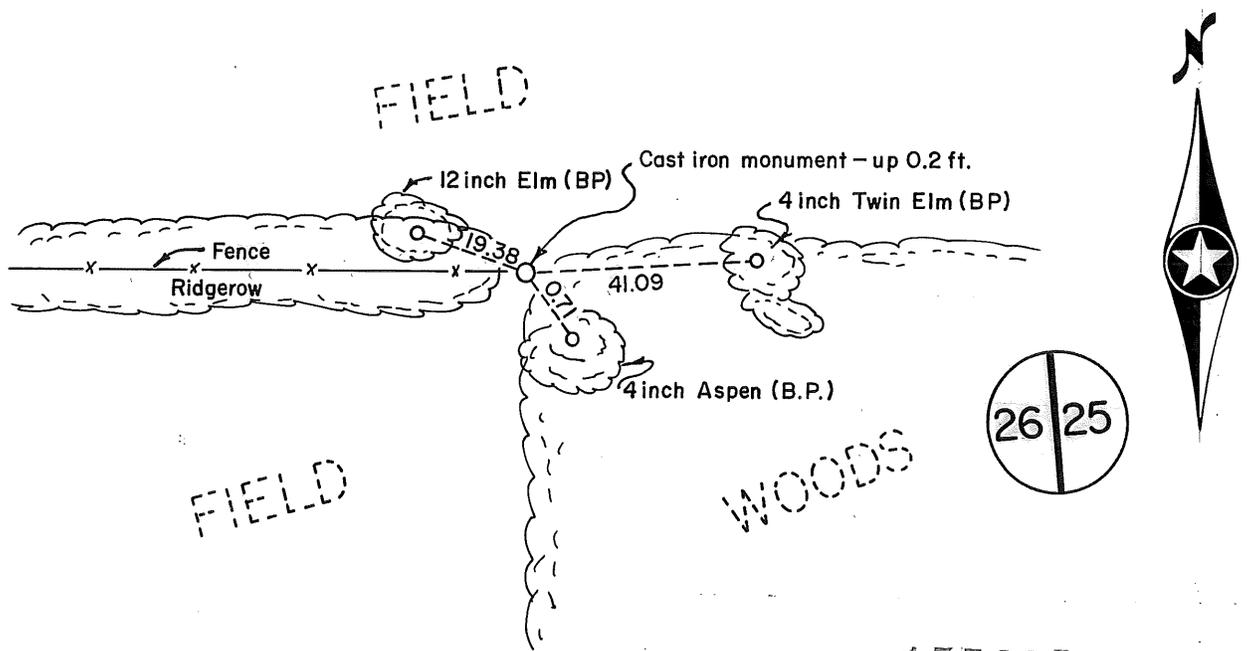

155685

County Recorder

Office of the Register of Deeds for said County:

I hereby certify that the within instrument was filed for record on the 14 day of April 1980 at 4 P.M.

F.A. Johnson
Register of Deeds County Recorder

By _____ Dept

Dated this 9th day of April, 1980.

John O. Oliver
Registered Land Surveyor No. 8194

County Surveyor

Deputy Co. Surveyor