

Certified, Filed and or Recorded on  
Sep. 23, 2008 AT 01:26PM


Signed: BW  
MARILYN J NOVAK G V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 34, Township 36N, Range 28W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 09/16/08 found a CAST IRON MONUMENT
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed on \_\_\_\_\_

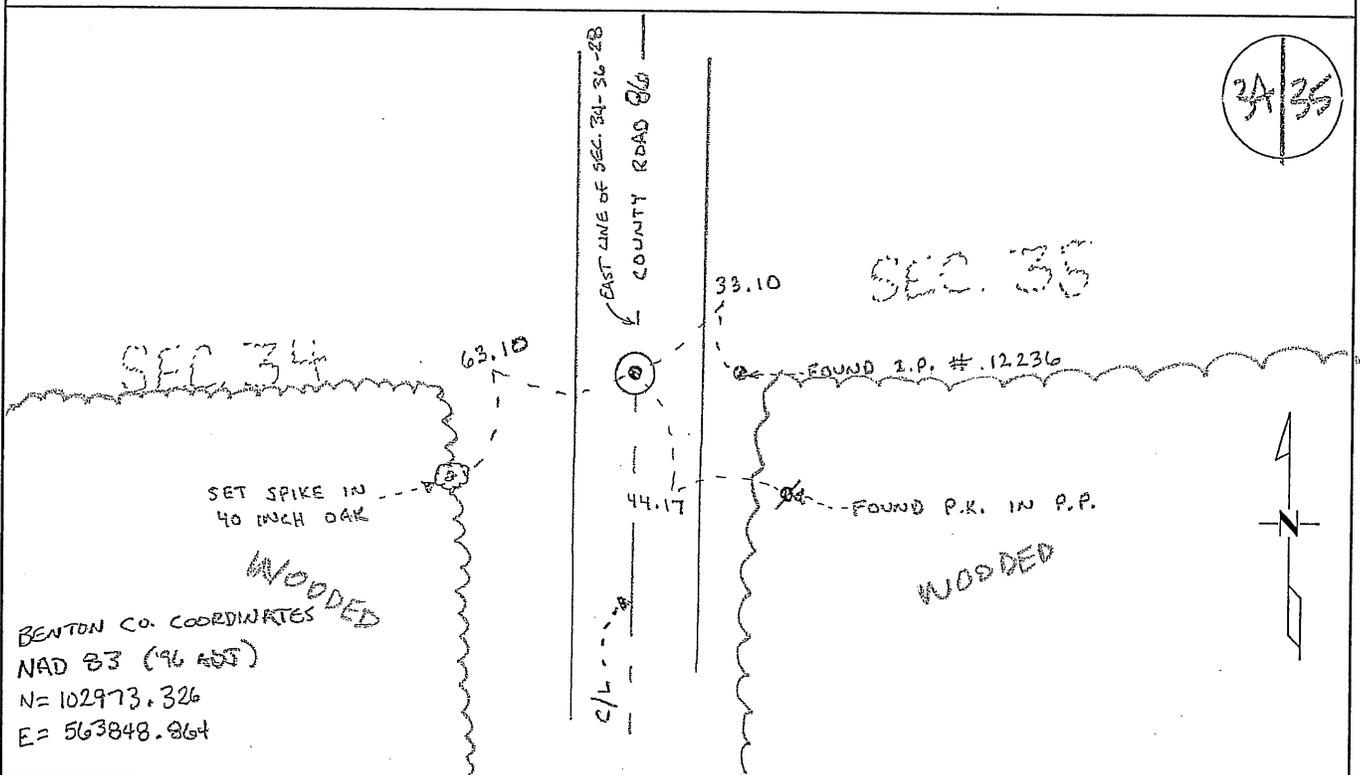

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oly  
Deputy Benton County Surveyor  
License No. 45872

Date: 9/22/08

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

J343

The East Quarter Corner of Section 34, Township 36 North, Range 28 West, Glendorado Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey established corner marked by a wood post with bearing trees noted as:
- |            |        |          |
|------------|--------|----------|
| 13" Poplar | N 46 E | 25 links |
| 15" W Oak  | S 44 W | 53 links |
- 1939 County Engineer's Notebook No. 123 contains survey of CAR 39 running south to north on section line. No corner is shown, but stationing shows east-west fence at 2670 feet north of the SE corner.
- 1987 Paul Wellen, LS 10461, found a ½" I. Pipe in the centerline of a north/south road and a fence line east/west. He replaced it with a cast iron monument and filed a Certificate of Location (#184284). Measured 2653.06 feet south to the SE corner of Section 34.
- 2001 Westwood Professional Services, Inc. found a cast iron monument at the centerline of a north/south road and an occupation line east/west.
- 2008 The Benton County Surveyor's Office searched and found the cast iron monument set by Wellen in 1987. The position as found gives a distance of 2652.98 ft. from the SE corner, which agrees with Wellens distance of 2653.06. Position agrees with occupation lines to the east and west. Accepted position as the best evidence and updated ties shown in Wellen's certificate dated 1987.

Benton County Coordinates obtained with GPS  
 NAD 83 (1996 Adjustment)  
 N-102973.326  
 E-563848.864

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter \_\_\_\_\_ Corner of Section 34, Township 36, Range 28, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 4-14-87 found a 1/2 inch iron pipe in Center Line of County Road 67, <sup>DATE</sup> opposite fence lines East & West.
  - left monument as found,  lowered monument,  removed monument (explain)
- On 5-12-87 placed a Cast Iron Monument <sup>DATE</sup>

## SKETCH OF REFERENCE TIES

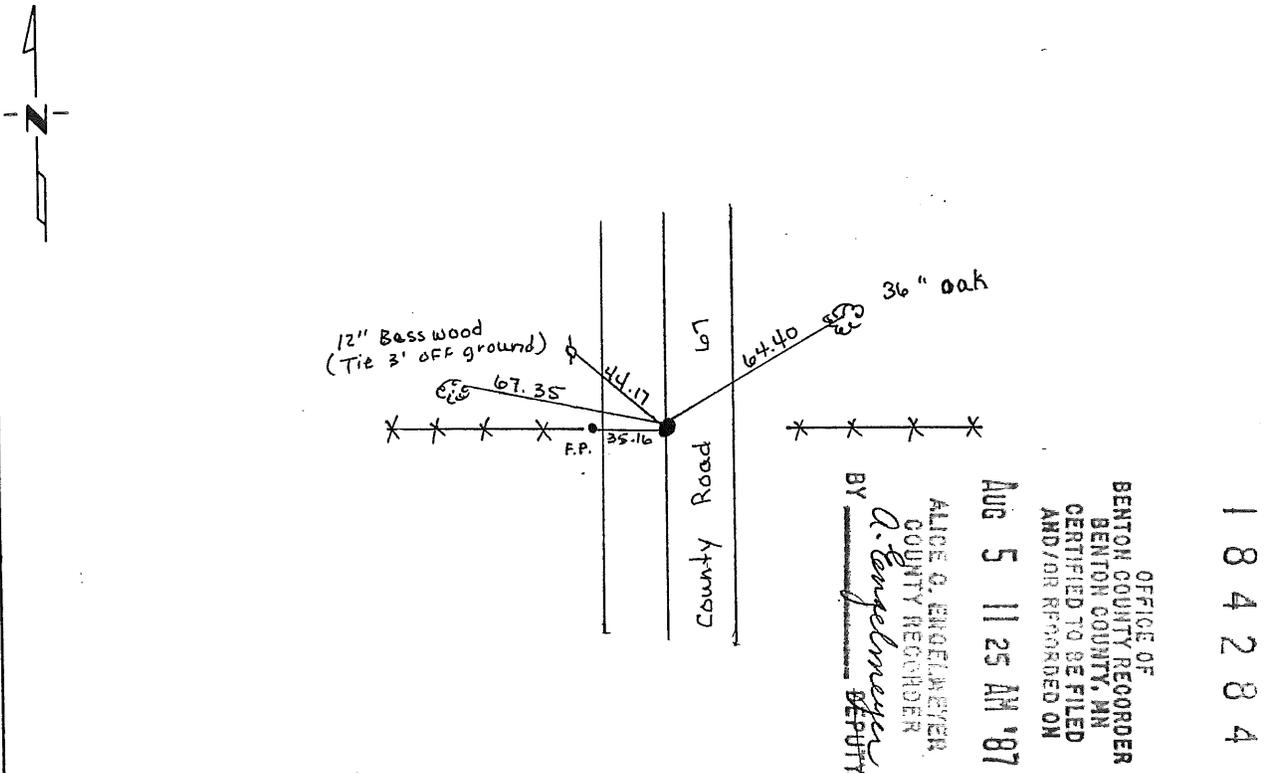

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Paul J. Allen* 5-13-87  
SIGNATURE DATE

Registration No. 10461

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_