

Certified, Filed and or Recorded on  
Sep. 23, 2008 AT 01:27PM

Signed: BW  
MARILYN J NOVAK G V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 35, Township 36 N, Range 28 W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 09/16/08 found a 1/2 INCH IRON PIPE

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

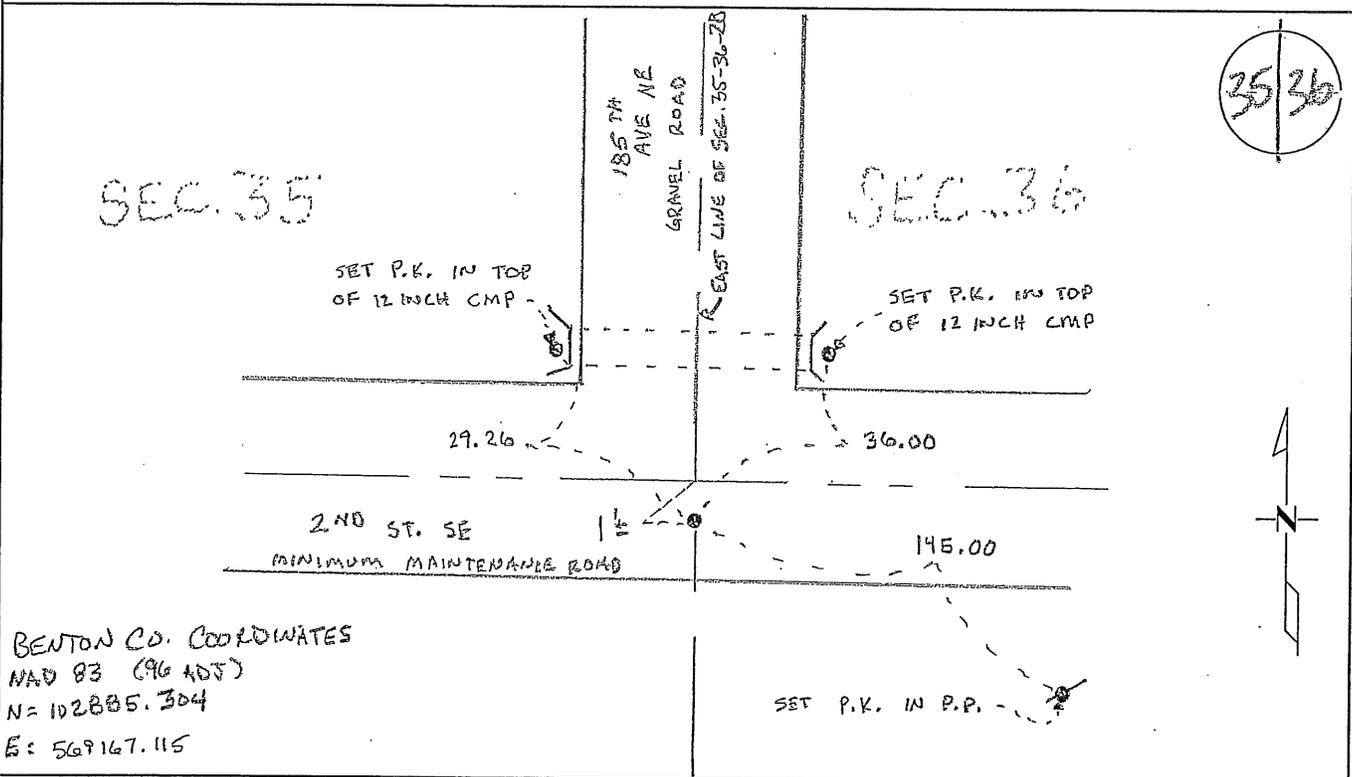

BENTON CO. COORDINATES  
NAD 83 (96 ADS)  
N = 102885.304  
E = 569167.115

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jean W. Oley  
Deputy Benton County Surveyor  
License No. 45872

Date: 9/22/08

Benton County Surveyor's Office  
Jason W. Oberg, Deputy County Surveyor  
Minnesota License No. 45872

**Statement of Evidence:**

**J353**

East Quarter Corner of Section 35, Township 36 North, Range 28 West, Glendorado Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey established corner and marked by a wood post with bearing trees noted as:  
14" Elm                      N 70 W                      413 links
- 2002 No resurvey information was found on this corner in the Benton County records.
- 2004 Certificate of Survey in SW ¼ of Section 35 by David Regan, LS 12236, shows iron pipe set for the corner.
- 2008 The Benton County Surveyor's Office searched and found Regan's ½" iron pipe set in 2004. The position agrees with occupation lines of east-west and north roads and occupation line to the south. Accepted Regan's iron pipe as the best evidence.

Benton County Coordinates obtained from GPS  
NAD 83 (1996 Adjustment)  
N-102885.304  
E-569167.115