

Certified, Filed and or Recorded on  
Oct. 07, 2008 AT 02:54PM


Signed: BW  
MARILYN J NOVAK *PVI*  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 1, Township 36N, Range 28W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/01/08 found a PK NAIL FLUSH WITH SURFACE OF ROAD 0.5' E  
NORTH OF CENTERLINE
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

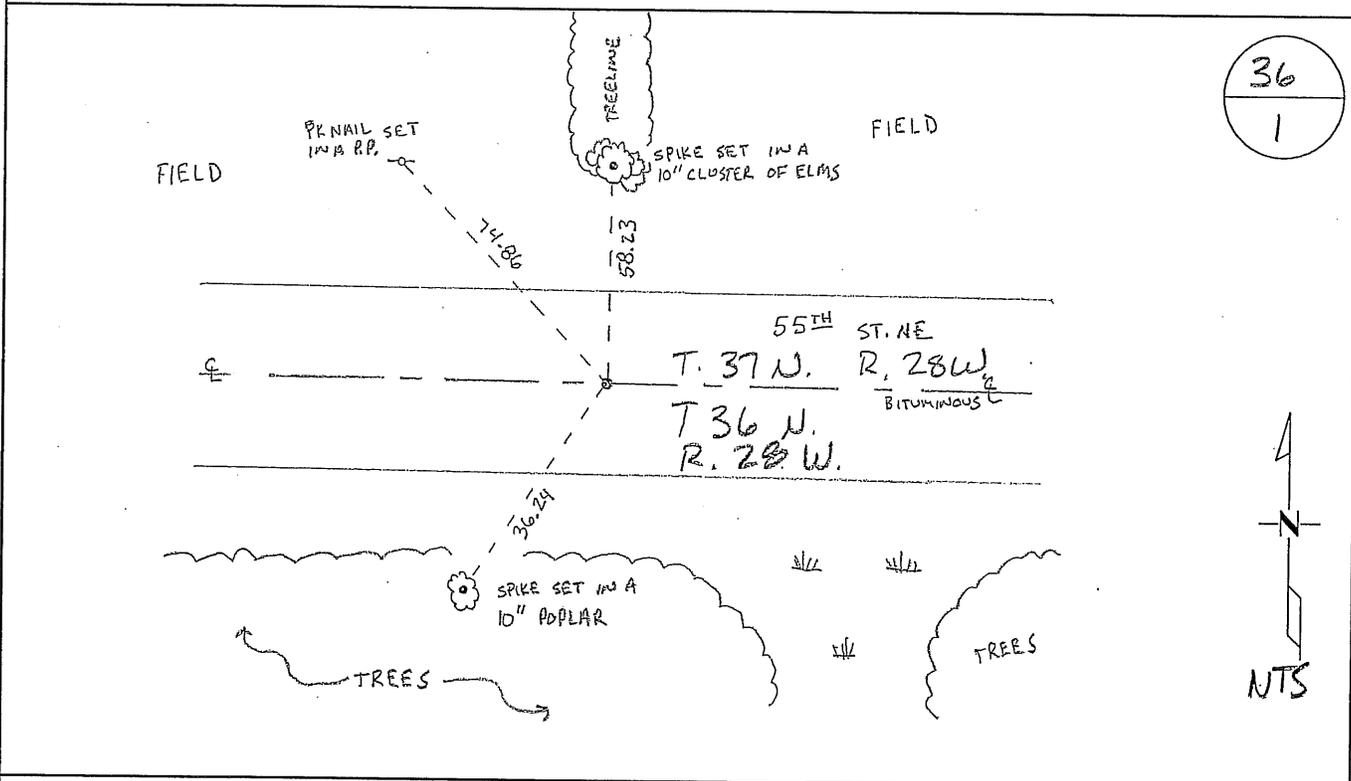

36  
1



Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Oly  
Deputy Benton County Surveyor  
License No. 45872

Date: 10/01/08

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

J011

North Quarter Corner of Section 1, Township 36 North, Range 28 West, Glendorado Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- |          |       |           |
|----------|-------|-----------|
| 8" W Ash | S 1 W | 209 links |
| 10" Elm  | N 2 E | 137 links |
- 1900 County Surveyors Record Book 1, page 9, notes a survey done by John Whilt subdividing Section 1. He notes a distance of 40.16 chains (2650.56 feet) to the NE and NW Cor Sec 1 (which indicates he set it lost) and a distance of 45.60 chains to the center of Sec 1.
- 1912 County Engineer's Notebook 1, pages 37 to 42 contains a survey for SR No. 10 by M. J. Cleveland. Notes show corner with stationing giving distances of 2654 feet to the NW corner and 2656 to the NE corner of Section 1.
- 1939 County Engineer's Notebook No. 125 contains survey of CAR 42 running east to west on township line. No corner is shown, but stationing shows fence north-south at 2670.0 to NE corner and 2647.5 feet to NW corner.
- 2008 The County Surveyor's Office searched and found a PK Nail set at approximately equidistant between the NW and NE corners of Section 1, and at centerline of 55<sup>th</sup> St N.E. Position falls 0°00'13" off of a straight line, thus appears to have been set at a lost position. Distance to the NW Cor. gives 2659.19 ft. and distance to the NE Cor. gives 2659.00 ft. These distances and position agree with Whilt's survey in 1900 and Cleveland's survey in 1912, and corner is accepted as the best evidence.

Benton County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-132797.837  
 E-571379.759