

Certified, Filed and or Recorded on
Oct. 07, 2008 AT 02:42PM


Signed: BW
MARILYN J NOVAK 6 V J
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 2, Township 36N, Range 28W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/01/08 found a CAST IRON MONUMENT
- left monument as found
- lowered monument
- removed monument (explain)
- On _____ placed an _____

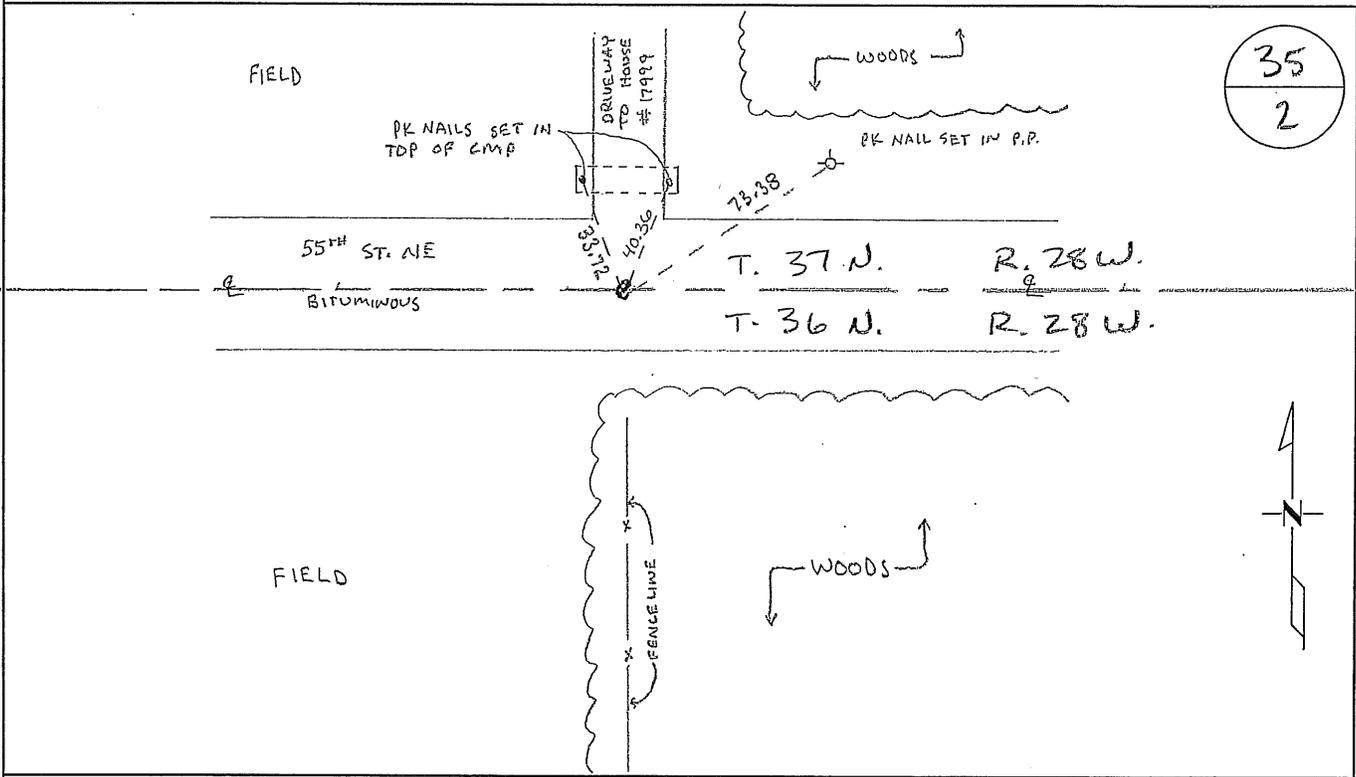

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 10/06/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**J021**

The North Quarter of Section 2, Township 36 North, Range 28 West, Glendorado Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|-------------|--------|----------|
| 8" Sugar | N 2 W | 26 links |
| 6" Ironwood | S 36 W | 22 links |
- 1901 County Surveyor's Record Book 2, page 454, and Record Book A, Map No. 35 shows a survey of Section 35, 37-28 by John E. Whilt. He notes a distance of 40.03 chains (2641.98 feet) to the SE Cor Sec 35 and a distance of 40.135 chains (2648.91 feet) to the SW Cor of Sec 35.
- 1912 County Engineer's Notebook 1, pages 37 to 42, contains a survey for SR No. 10 by M. J. Cleveland. Notes show corner as a spike with stationing giving distances of 2652 feet to the NW corner and 2653 to the NE corner of Section 2.
- 1939 County Engineer's Notebook No. 125 contains survey of CAR 42 running east to west on township line. Corner is shown as a spike in center of road with fence lines north and south. Ties:
- | | | |
|----|----|-------|
| TP | N | 19.9' |
| PP | NE | 32.9' |
- Stationing gives distances of 2647.0 feet to the NE corner and 2650.9 feet to NW corner with no angle.
- 1979 Paul Wellen, LS 10461, set a cast iron monument and the intersection of a fence line south and the centerline of County Road 51 (running east and west). He filed a Certificate of Location (#155136) and notes a distance of 2656.86 feet to the NW corner Sec 2 and a distance of 2645.77 feet to the NE corner Sec 2.
- NOTE: Wellens' position fits within 2 feet of the 1901 proportion and can be accepted as marking the obliterated corner position.
- 2008 The County Surveyor's Office searched and found a cast iron monument, as set by Wellen in 1979. Distances to the NW Cor. and the NE Cor. give 2656.77 ft. and 2645.72 ft., respectively. Position agrees within 2.04 ft. of the proportioned 1901 position and is accepted as marking the obliterated corner position. Ties were updated.

County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-132753.038
 E-566075.024

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter _____ Corner of Section 2, Township 36, Range 28, _____ P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 8-22-79 found a fence line to the south and the centerline of County Road No. 51

left monument as found, lowered monument, removed monument (explain)

On 8-22-79 placed a a permanent marker consisting of Benton County Cast Iron Monument

SKETCH OF REFERENCE TIES



Refer to next page.

Statement of evidence relative to this corner location is on back of page. #155136

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Wellen

SIGNATURE

DATE

Registration No. 10461

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

79-81 B-13 P-118 County Recorder
OFFICE OF THE REGISTER OF DEEDS
Benton
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at 9 A.M. on the 1st day of February A.D., 19 80

Register of Deeds F. A. Johnson

By _____, Deputy


DOCUMENT NO. 155136

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

12-156

I hereby certify that on the 22 day of August, 1979
I did set the North Quarter corner of Section 2,
Twp. 36, Rg. 28, Benton County, Minnesota, which
was evidenced by a fence line to the south and the centerline of
County Road No. 51

I further certify that in order to perpetuate said corner I did
at the exact location thereof place a permanent marker consisting
of Benton County Cast Iron Monument and that
I did establish witness or reference monuments as shown below:

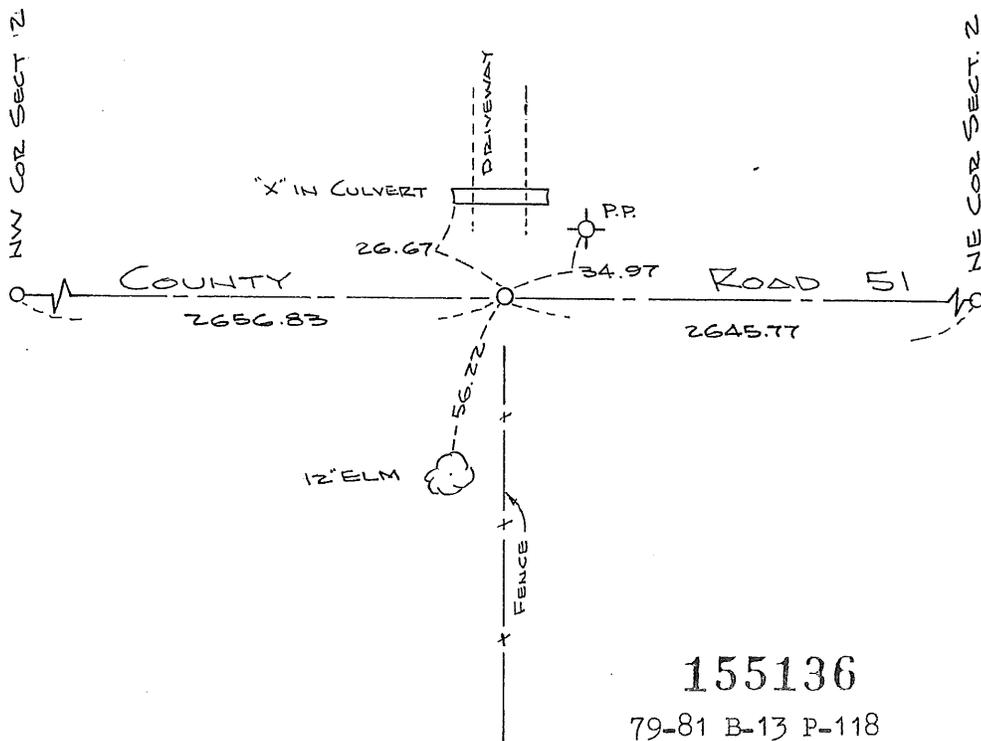

155136

79-81 B-13 P-118

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
was filed for record in this office on the
1st day of February, 1980.
22 9 A.M.

F.A. Johnson
County Recorder

By _____ Deputy.

I hereby certify that the above
is true and correct and that I am
a registered Land Surveyor under
the laws of the State of Minnesota.

Paul J. Hillen

Minn. Registration No. 10461