

Certified, Filed and or Recorded on
Oct. 07, 2008 AT 02:52PM


Signed: BW
MARILYN J NOVAK Q V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 13, Township 36 N., Range 28 W.
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 09/29/08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

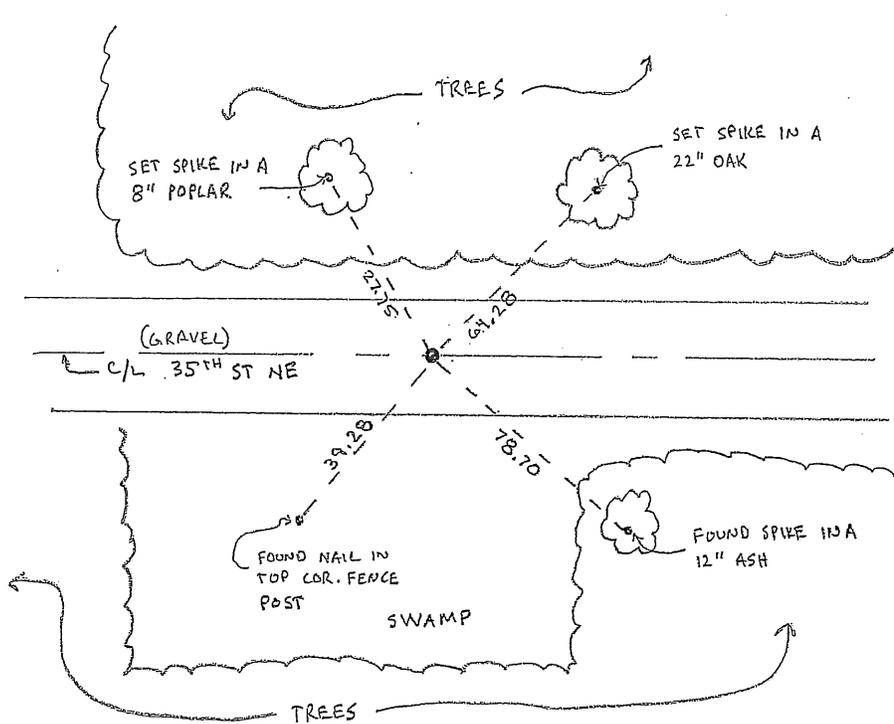

12
13



Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 10/06/08

PAGE 1 OF 2

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

J131

The North Quarter of Section 13, Township 36 North, Range 28 West, Glendorado Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey established corner marked by a wood post with bearing trees:
- | | | |
|-----------|----------|----------|
| 16" Maple | N 59 ½ W | 47 links |
| 6" Ash | S 43 W | 81 links |
- 1965 MN/DNR survey crew notes state the corner was set on line and at the midpoint between the NE and NW corners. The total distance is 5324.00 feet.
- 1988 William Lunser, LS 9394, set a cast iron monument at the lost position measuring 5324.00 feet for the north line of Section 13. He filed a Certificate of Location (#191243).
- 2008 The County Surveyor's Office searched and found a cast iron monument near the lost position as set by Lunser in 1988. The overall distance of the north line of Section 13 was measured as 5324.20 ft. which agrees with the MN/DNR information from 1965. The Surveyor accepts the Lunser method and position and updated ties.

Benton County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-121753.832
 E-571515.296

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North 1/4 Corner of Section 13, Township 36, Range 28, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5-18-88 placed a Benton County Cast Iron Monument
DATE

SKETCH OF REFERENCE TIES

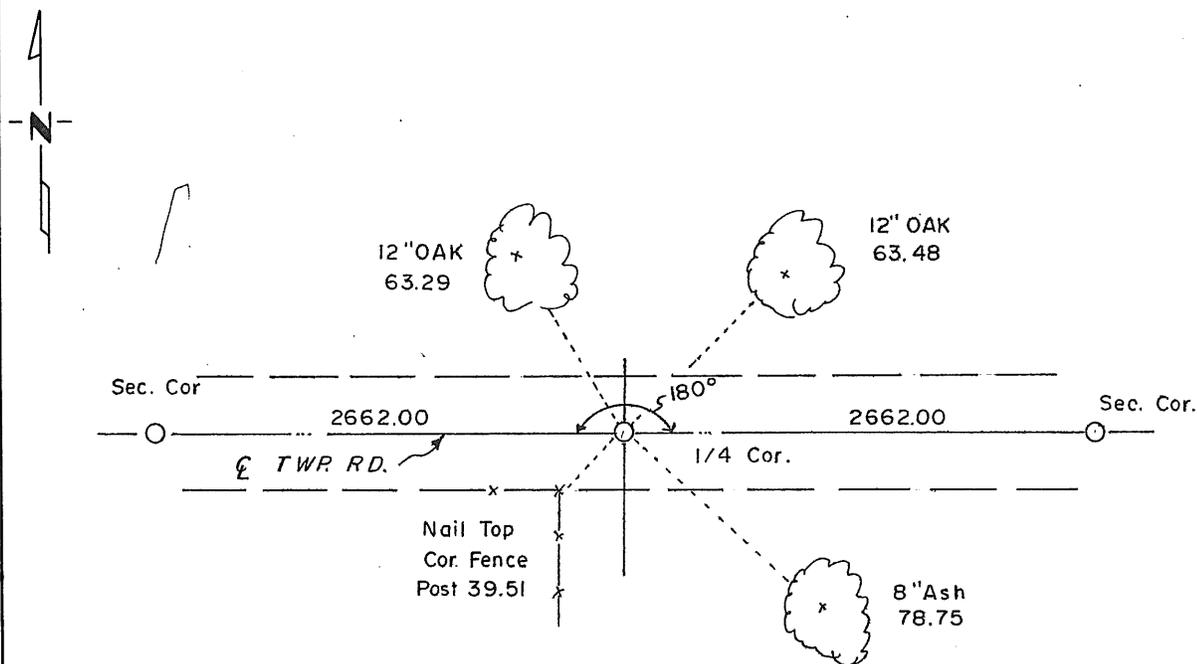

Note : All Ties are
40 penny Spikes

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Larson 12/15/88
SIGNATURE DATE

Registration No. 9394

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

5-21-65 The Dept. of Natural Resources notes state, they set this corner on line and at the midpoint between the northeast and northwest corners of said section. Their measured distance between the section corners was 5324.00 feet.

The Dept. of Natural Resources Holds a Deed for the East 33 feet of the NE $\frac{1}{4}$ NW $\frac{1}{4}$ of section 13. This explains why the fence is west of the North $\frac{1}{4}$ corner of said section 13.

191243

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 11 59 AM '89

ALICE G. ENGELHAYEN
COUNTY RECORDER

BY Jed DEPUTY