

Certified, Filed and or Recorded on
Oct. 07, 2008 AT 02:49PM


Signed: BW
MARILYN J NOVAK
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 26, Township 36N, Range 28W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 9/29/08 found a CAST IRON MONUMENT UNDER BITUMINOUS OF STATE HIGHWAY 95. FIT SKIPTON'S TIES.
- left monument as found lowered monument removed monument (explain)
- On 09/29/08 placed an PK NAIL WITH BENTON COUNTY SURVEYOR DISK

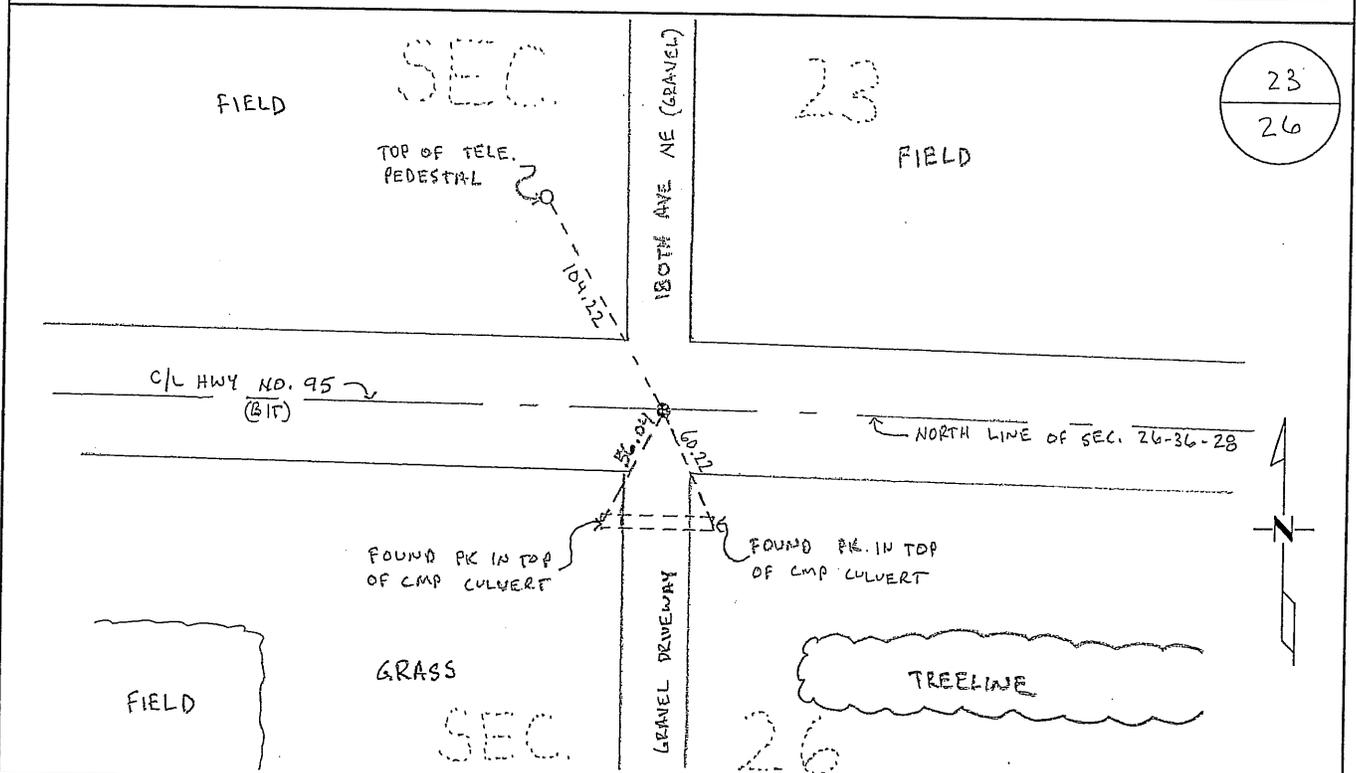

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jean W. Oly
Deputy Benton County Surveyor
License No. 45872

Date: 10/06/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**J261**

The North Quarter of Section 26, Township 36 North, Range 28 West, Glendorado Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded:

25" Poplar S 50 W 733 links

1914 County Surveyor's Record Book 1, pages 53-54, and Record Book A, Map No. 19, notes a survey of Section 23 by JP Soderstrum. He found a stone at the corner as set by Sam Oslin 20 years previous. A fence was built to the south that checks OK for the corner. Corner is 8 links (5.28 feet) south of true line between section corners and 39.30 chains (2593.8 feet) east of the SW corner. He measured 78.67 chains (5192.22 feet) between section corners. He notes center of road running north. Note: Map shows distances of 39.33 ½ chains (2596.11 feet) to the section corners.

Undated Roll E-4, of the MN/DOT Highway plans for TH 95, show no corner point was found and corner position is assumed in center of road intersection, with roads west, east, and north.

1988 Bruce Skipton, LS 17768, searched for the corner at the centerline of a road east/west and the centerline of a trail north. He found nothing. The search area was near where MN/DOT assumed the corner was. Using measurements to the NE and NW corners of the section, he set a cast iron monument at the position of the MN/DOT assumed corner. He filed a Certificate of Location (#191327).

Survey information from Wellen & Associates, gives distances of 2593.68 feet to the NW corner and 2600.27 to the NE corner and corner is 1.93 feet south of a straight line between section corners.

2004 Note: It appears Skipton's position agrees reasonably well with the 1914 position established by Soderstrum even though he did not have that information at the time he set the corner.

2008 The County Surveyor's Office searched and found a cast iron monument below the bituminous on State Highway 95. The position align's with a fence line going north and fits Skipton's ties from 1988. Distances to the NW and NE corners give 2594.61 ft. and 2599.40 ft., respectively, which agrees with Soderstrum's 1914 position. The Surveyor set a PK nail with a washer flush with the surface and ties were updated.

County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-110932.976
 E- 566478.706

NOTE: It is recommended that the stone monument referenced in County Surveyor's Record Book 1, pages 53-54, and Record Book A, Map No. 19, by JP Soderstrum, be searched for during any future State Highway 95 construction in this area.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH 1/4 Corner of Section 26, Township T36N, Range R28W, 4TH P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 19 SEPT 1988 placed a CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

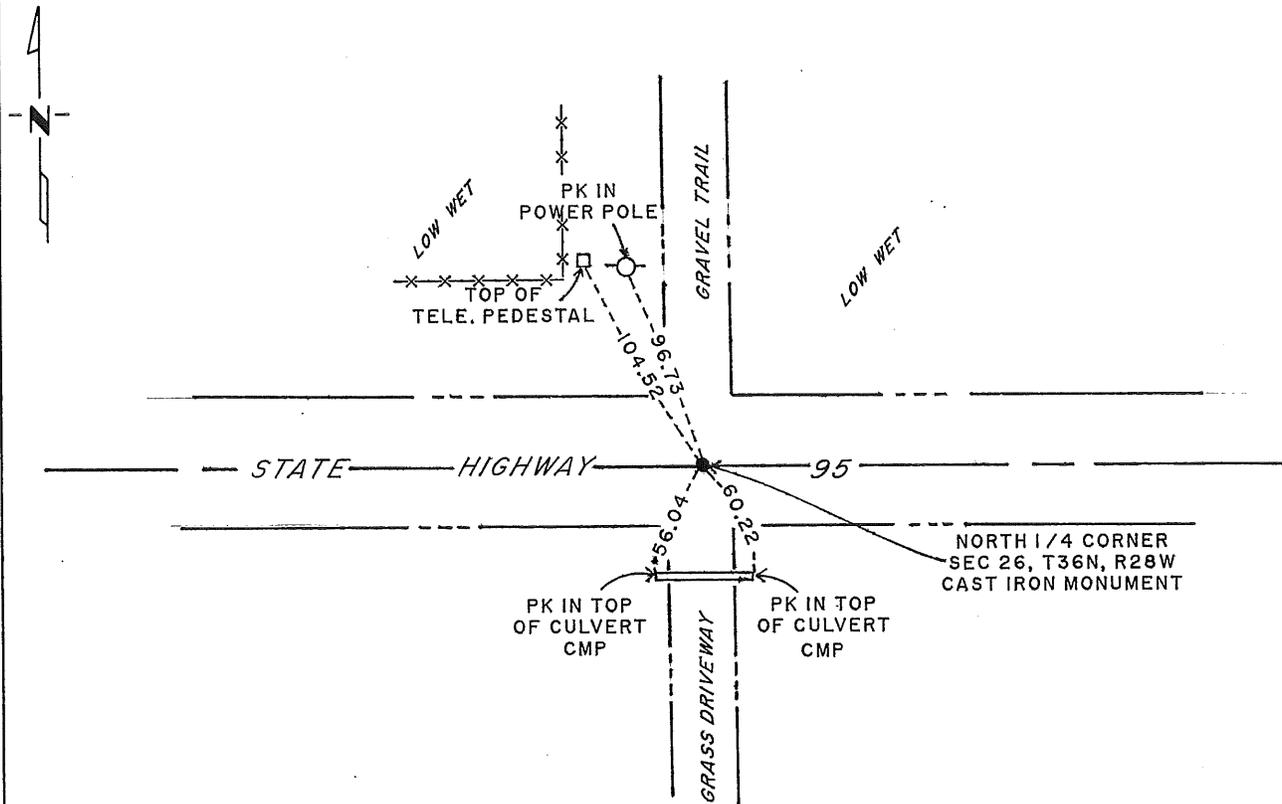

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Shuster SIGNATURE 12-20-88 DATE

Registration No. 17768

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

NORTH QUARTER CORNER, SECTION 26, T36N, R28W, 4TH P.M.

1. The original survey was accomplished in July 1855 by Oscar F. Davis.
2. Benton County's old surveyor's books provided no information to relocate said corner.
3. MNDOT TH. 95 R/W map indicated the corner was assumed.
4. September 12, 1988, Paul E. Wellen & Associates Inc., searched for said corner at the center lines of TH 95 and the old trail from the north and found nothing. This search location was also near the position of MNDOT assumed corner. After analyzing the measurements to the northwest corner of said section and to the northeast corner of said section, we relocated said corner at the position of MNDOT assumed corner. On September 19, 1988, we set a cast iron monument at said corner.

191327

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 20 8 54 AM '89

ALICE C. ENGELMEYER
COUNTY RECORDER

BY Alc DEPUTY