

Certified, Filed and or Recorded on  
Oct. 14, 2008 AT 10:17AM


Signed: CK  
MARILYN J NOVAK G V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 27, Township 36N, Range 28W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_
- left monument as found       lowered monument       removed monument (explain)
- On 10/07/08 placed an P.V. NAIL WITH BENTON COUNTY SURVEYOR DISK

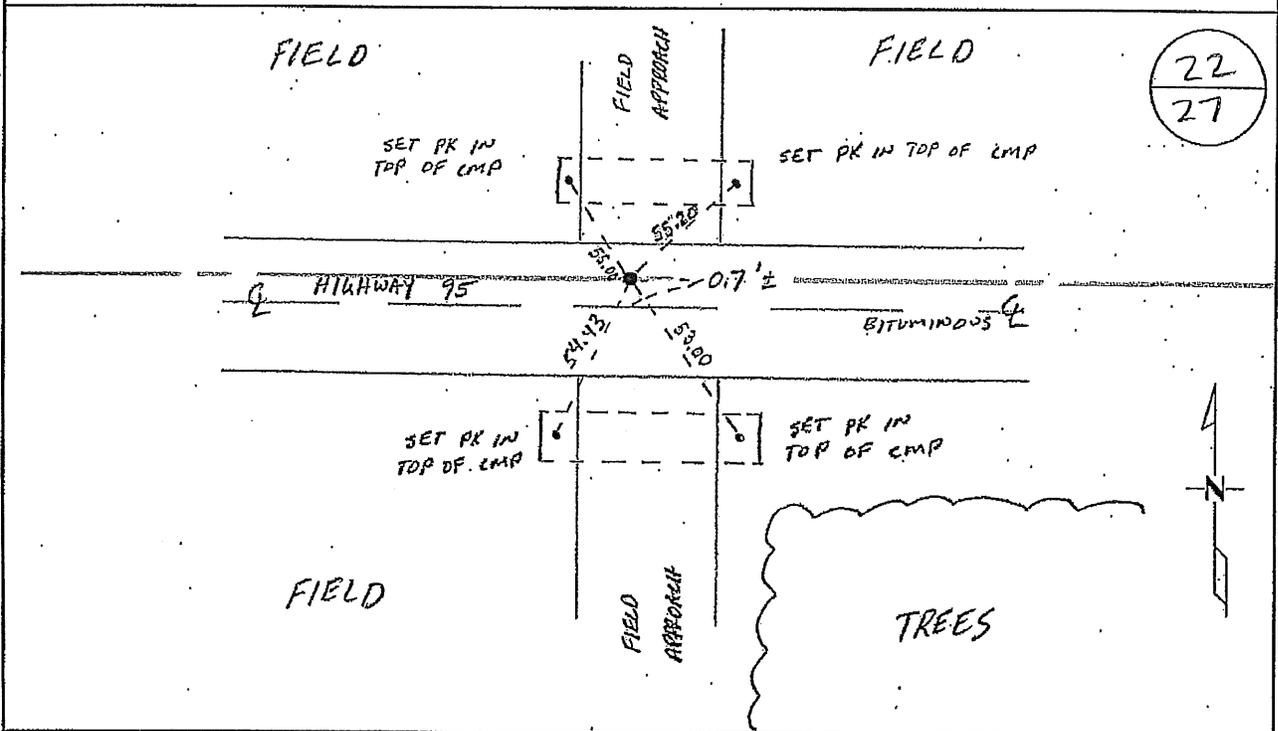

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Signature]  
Deputy Benton County Surveyor  
License No. 45872

Date: 10-13-2008

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

J271

The North Quarter of Section 27, Township 36 North, Range 28 West, Glendorado Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded:

10" Blk Ash                      N 74 ½ W                      233 links

1901 County Surveyor's Record Book 1, page 61, and Record Book A, Map No. 40, is a survey of the subdivision of Section 27 by John E. Whilt. Survey shows corner midway between section corners with 1/16<sup>th</sup> corners set east and west. Gives distance of 79.68 chains (5258.88 feet) between section corners.

1926 County Surveyor's Record Book 1, pages 51 and 52, and Record Book A, Map No. 48, contains a survey of Section 22 by Harry Elletson. (Notes in Notebook 48) He states that all evidence destroyed and he found no evidence of this corner or of the bearing trees. He set the corner lost, measuring 5260.00 feet between section corners. He set an iron monument.

1970's Roll E-4, of the MN/DOT Highway plans, show the corner is marked by an I.P. and is 2.10 ft N of CL with the following reference ties.

N & D FP	NE	37.75
N & D FP	NW	59.0
N & D FP	NE	91.45

2008 The County Surveyor's Office searched the area following Highway 95 construction during the summer of 2007, and did not find evidence of the I.P. referenced in the 1970's MnDOT plans. Per MnDOT R/W Map No. 29-6 (1970's Roll E-4, as referenced above), stationing along Highway 95 from said I.P. referenced shows a distance of 2630.79 ft. to the NW Cor. and 2630.95 ft. to the NE Cor., suggesting that it may have been set lost, and previous overall measurements of the north line of Sec. 27 seem to be in harmony with Whilt's and Elletson's earlier surveys (5255.88 ft. Whilt vs. 5260.00 ft. Elletson vs. 5261.74 ft. MnDOT R/W Map No. 29-6). The Surveyor's Office measured 5262.47 ft. After said 2007 construction, a lost position places the corner at 0.7 ft. north of the traveled centerline and in line with field approaches to the north and south of Highway 95. The Surveyor accepts the lost position and set a P.K. Nail with a Benton County washer and made ties to same.

County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-110973.020  
 E-561253.090

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


E 1/4 CORNER Corner of Section 27, Township 36, Range 28, 4TH P.M.

STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 9/17/90 placed a CAST IRON MONUMENT  
DATE

### SKETCH OF REFERENCE TIES

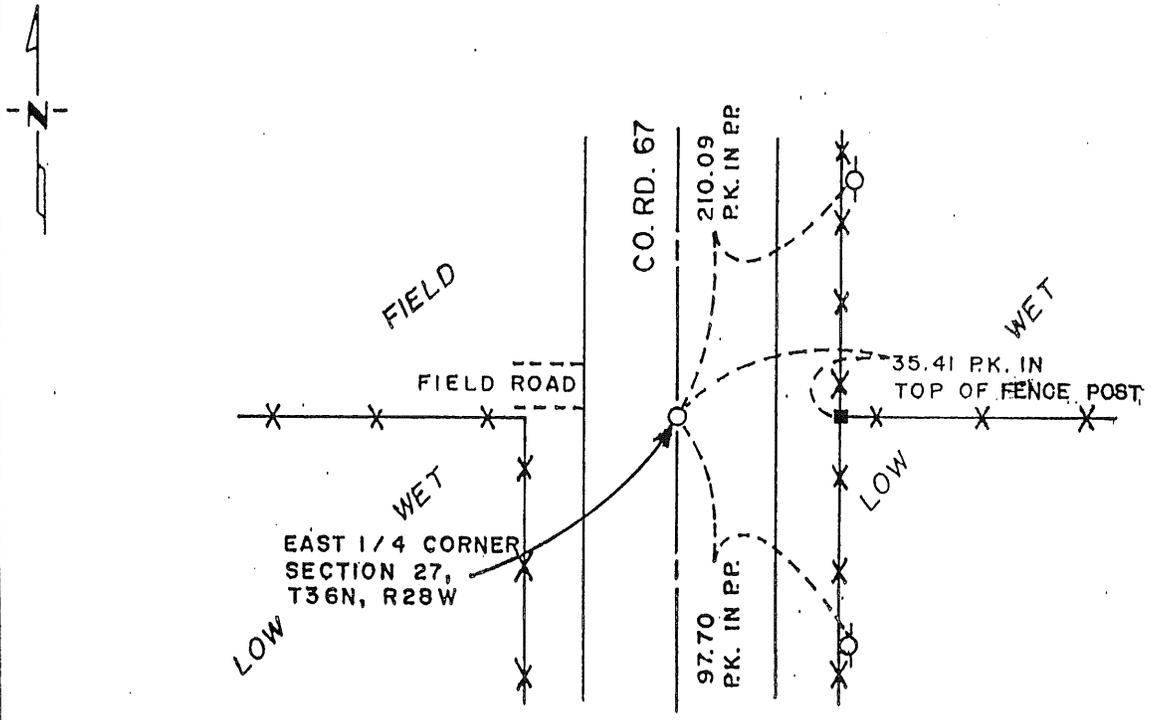

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature]  
SIGNATURE      11/14/91  
DATE

Registration No. 10461  
 Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_  
By \_\_\_\_\_, Deputy  
DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

East 1/4 corner of Section 27, T 36  
N, R 28 W, of the 4th Principal Meridian.

1. During the G.L.O. Survey of 1855, Mr. Oscar F. Davis, a U.S. Deputy Surveyor set a wood post to mark this corner.
2. A search of the Benton County Surveyor records provided no information for the location of this corner.
3. On September 17, 1990, Paul E. Wellen & Associates, Inc., placed a cast iron monument at this location. We also established reference ties as indicated.

201452

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

FEB 25 8 09 AM '91

ALICE G. ENGELMEYER  
COUNTY RECORDER

BY Jw DEPUTY