

264148

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

FEB 8 11 44 AM '00

ALICE C. ENGELMEYER  
COUNTY RECORDER

BY Mm DEPUTY xm

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 29, Township 36, Range 28  
4 TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 02/02/1999 found  NOTHING  
DATE

left monument as found     lowered monument     removed monument (explain)

On 02/02/1999 placed a Mn/DOT C.I.M.  
DATE  
MONUMENT IS 15.1' FEET NORTH OF THE CENTERLINE OF T.H. 95

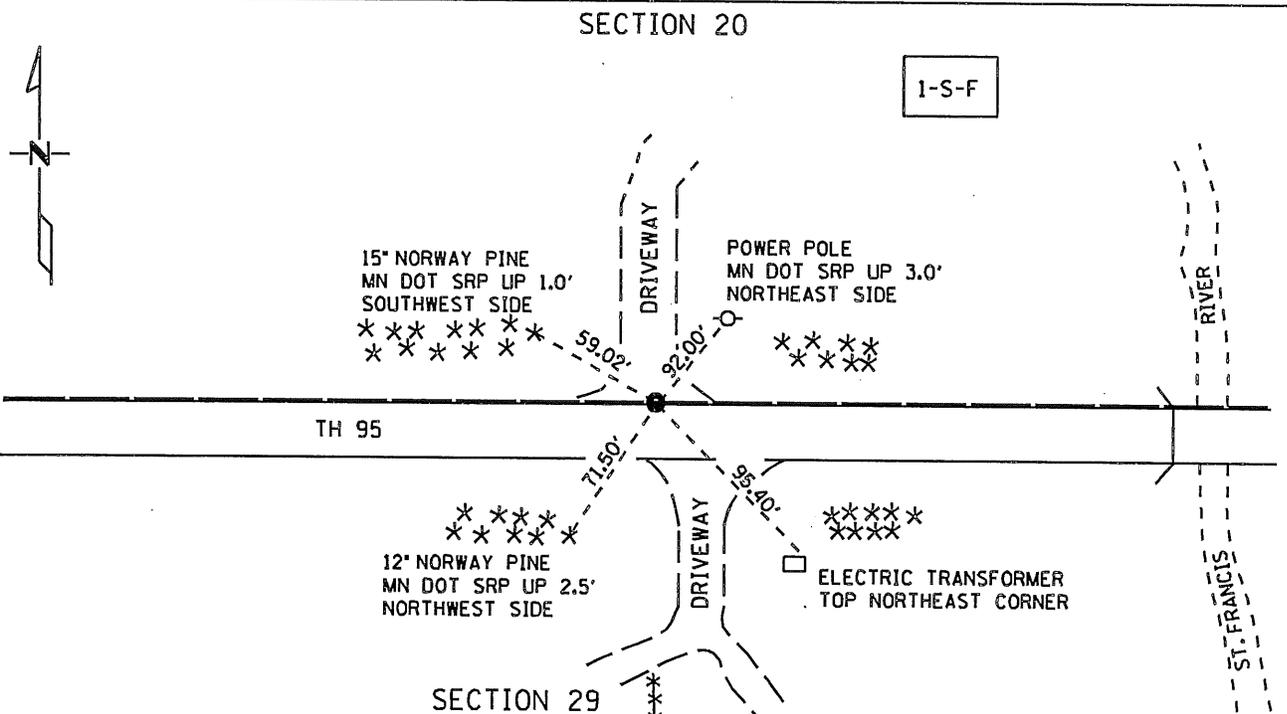

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature James Krause

Date 1/5/00

License No. 23668

Title:  Land Surveyor     Professional Engineer     County Surveyor     County Engineer

Statement of Evidence: North Quarter Corner Section 29, Township 36 North, Range 28 West.

In 1855 the original public land survey was run and a wood post was set to mark the corner.

In 1942 the Minnesota Highway Department notes (Book #89, pages 1-34) call for an assumed corner in the center of the in-place east-west road and on line with fences north and south. The corner location is referenced to the Lw centerline on pages 1-22 as 4.7 feet back and 15.1 feet north of the P.T. station 511+50.5.

In 1949 TH 95 was reconstructed moving the road south of the 1942 location.

In 1997, the Minnesota Department of Transportation searched the area and no evidence of the corner was found.

In April of 1999, the Minnesota Department of Transportation set the corner at the 1942 location. This location is 2652.28 feet east of the Northwest Corner of Section 29 and 2649.89 feet west of the Northeast Corner of Section 29. A certificate was filed at this time, refer to Doc. No. 261579.

In January of 2000 the Minnesota Department of Transportation found an error in the previously recorded certificate, Doc. No. 261579. A distance of 71.50 feet to a 12 inch norway pine tree was inadvertently omitted during the drafting of the certificate. A new certificate was created to correct this omission.

For details and survey analysis, contact the Minnesota Department of Transportation District Surveys Office in Baxter, Minnesota.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 29, Township 36, Range 28, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On \_\_\_\_\_ found ~~XX~~ nothing  
DATE \_\_\_\_\_
- left monument as found,  lowered monument,  removed monument (explain)
- On 02/02/1999 placed a Mn/DOT C.I.M.  
DATE \_\_\_\_\_

### SKETCH OF REFERENCE TIES

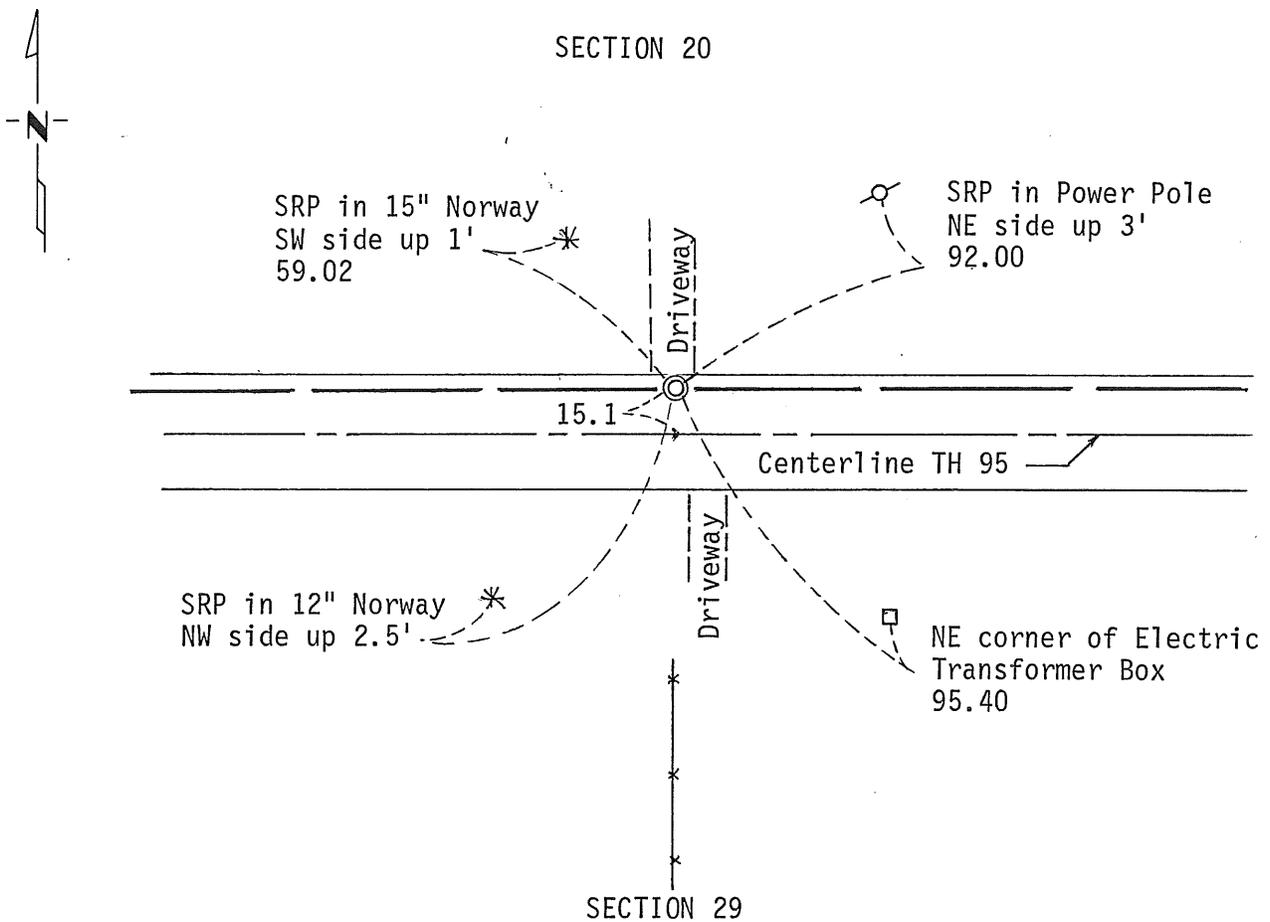

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielson 4/12/99  
SIGNATURE DATE

Registration No. 11865

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

NORTH QUARTER CORNER SECTION 29, TOWNSHIP 36 NORTH,  
RANGE 28 WEST, BENTON COUNTY, MINNESOTA

In 1855 the original public land survey was run and a wood post was set to mark the corner.

In 1942 the Minnesota Highway Department notes (Book #89, pages 1-34) call for an assumed corner in the center of the in-place east-west road and on line with fences north-south. The corner location is referenced to the L<sup>W</sup> centerline on pages 1-22 as 4.7 feet back and 15.1 feet north of P.T. station 511+50.5.

In 1949 TH 95 was reconstructed moving the road south of the 1942 location.

In 1997, the Minnesota Department of Transportation searched the area and no evidence of the corner was found.

In 1999, the Minnesota Department of Transportation set the corner at the 1942 location. This location is 2652.28 feet east of the Northwest Corner of Section 29 and 2649.89 feet west of the Northeast Corner of Section 29.

For details and survey analysis contact the Minnesota Department of Transportation Surveys Office in Baxter.

261579

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

OCT 6 8 37 AM '99

ALICE S. ENGELHAYEK  
COUNTY RECORDER

BY *[Signature]* DEPUTY