

Certified, Filed and or Recorded on
Sep. 23, 2008 AT 01:25PM

Signed: BW
MARILYN J NOVAK G V
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH 1/4 Corner of Section 34, Township 36 N, Range 28 W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:


On 09/16/08 found a CAST IRON MONUMENT

left monument as found

lowered monument

removed monument (explain)

On _____ placed an _____

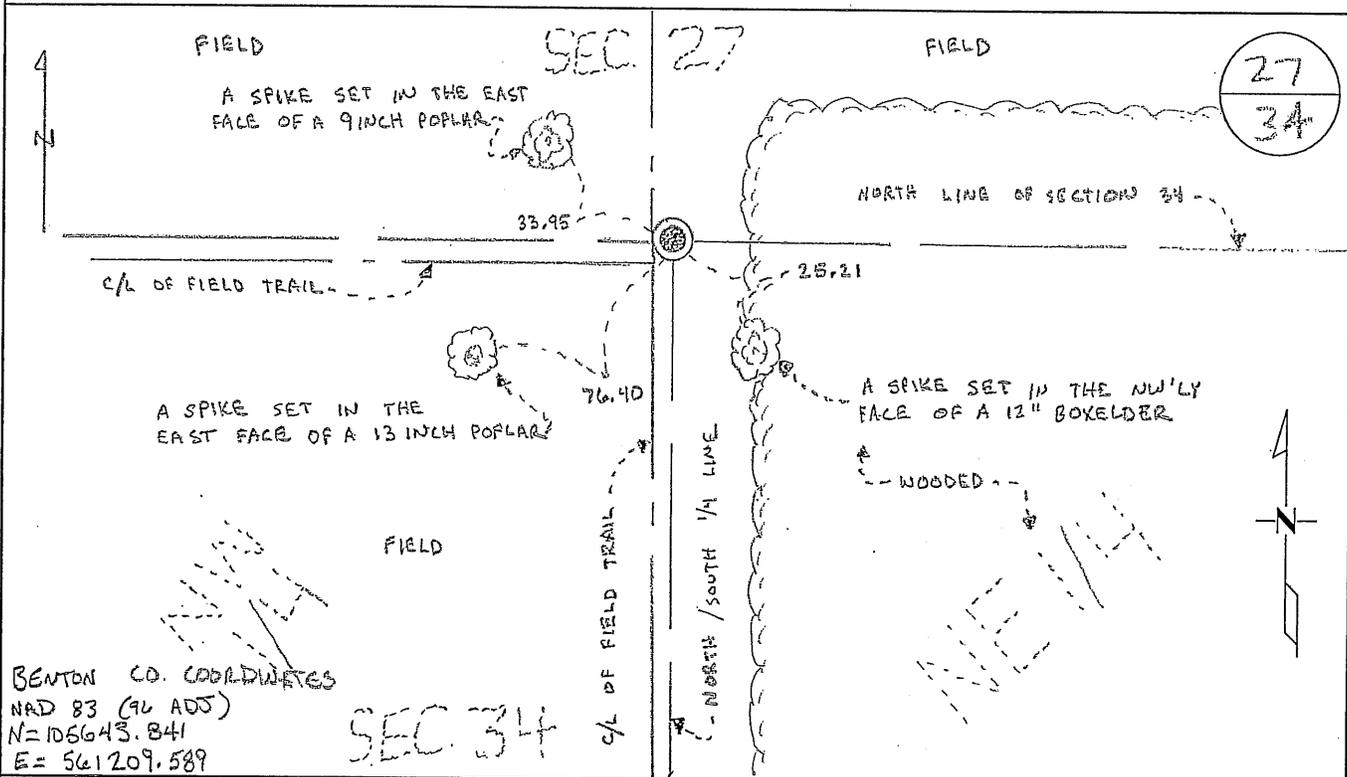

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. O'Connell
Deputy Benton County Surveyor
License No. 45872

Date: 9/22/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

J341

The North Quarter of Section 34, Township 36 North, Range 28 West, Glendorado Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post with bearing trees noted as:

6" Blk Ash	S 64 E	28 links
9" Bur Oak	N 29 E	16 links

1901 County Surveyor's Record Book A, Map No. 40 is a survey of Section 27 by John Whilt. Distance of 40.00 chains to SW corner and 40.07 chains to SE corner of Section 27.

1993 Dennis Taylor, LS 15233, established corner by proportionate distance between section corners using Whilt's 1901 survey distances. He set a cast iron monument and filed a Certificate of Location (Doc. No. 212585).

2008 The Benton County Surveyor's Office searched and found the cast iron monument as set by Dennis Taylor in 1993. Position agrees with distances from Whilt's 1901 survey, where we measured 2645.29 ft. (40.08 ch.) to the SE Cor. of Sec. 27 (Whilt 40.07 ch.) and 2640.79 ft. (40.01 ch.) to the SW Cor. of Sec. 27 (Whilt 40.00 ch.). Accepted position as the best evidence and updated ties shown on Taylor's 1993 Certificate of Location.

Benton County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-105643.841
 E-561209.589

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH 1/4 Corner of Section 34, Township 36, Range 28, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

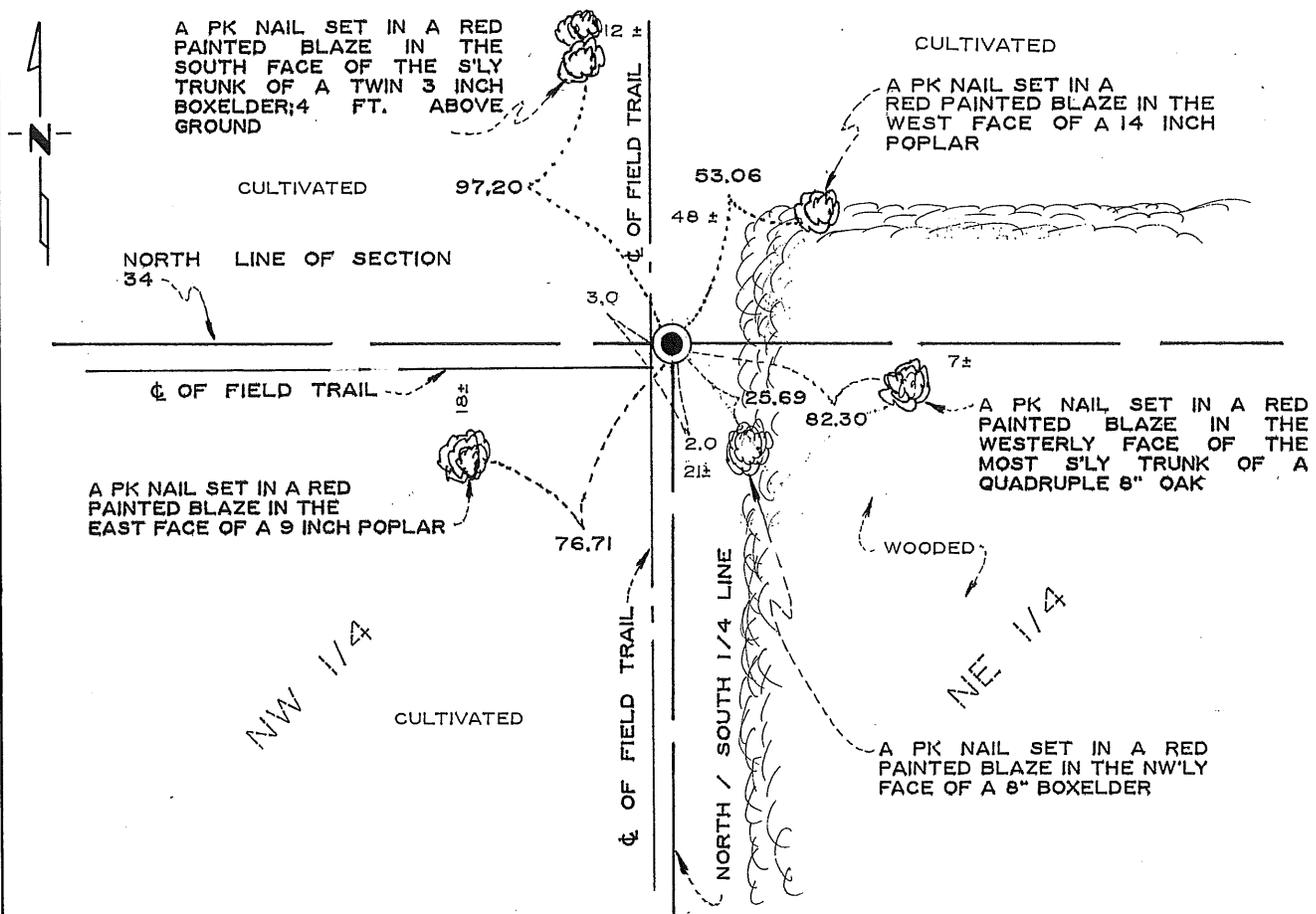

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Dennis V. Taylor 1-12-93
SIGNATURE DATE

Registration No. 15233

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 _____

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

Set North Quarter corner of Section 34, Township 36, Range 28, on line and by proration per a survey dated June 26, 1901 by John E. Whilt, County Surveyor.

No bearing trees referenced in the original plat notes were found.

Per Lucille Halvorson, the partially constructed road located between the Northwest corner and the North Quarter corner is on the north line of the section. The reason the road was started and never completed, she did not know.

Set Cast Iron Monument at location of North Quarter Corner flush with ground surface.

212585

OFFICE OF
BENSON COUNTY RECORDER
BENSON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 13 9 40 AM '93

ALICE G. ENGELMEYER
COUNTY RECORDER

BY *[Signature]* DEPUTY