

Certified, Filed and or Recorded on
Sep. 23, 2008 AT 01:27PM


Signed: BW
MARILYN J NOVAK G V A
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 35, Township 36N, Range 28W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 09/17/08 found a CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

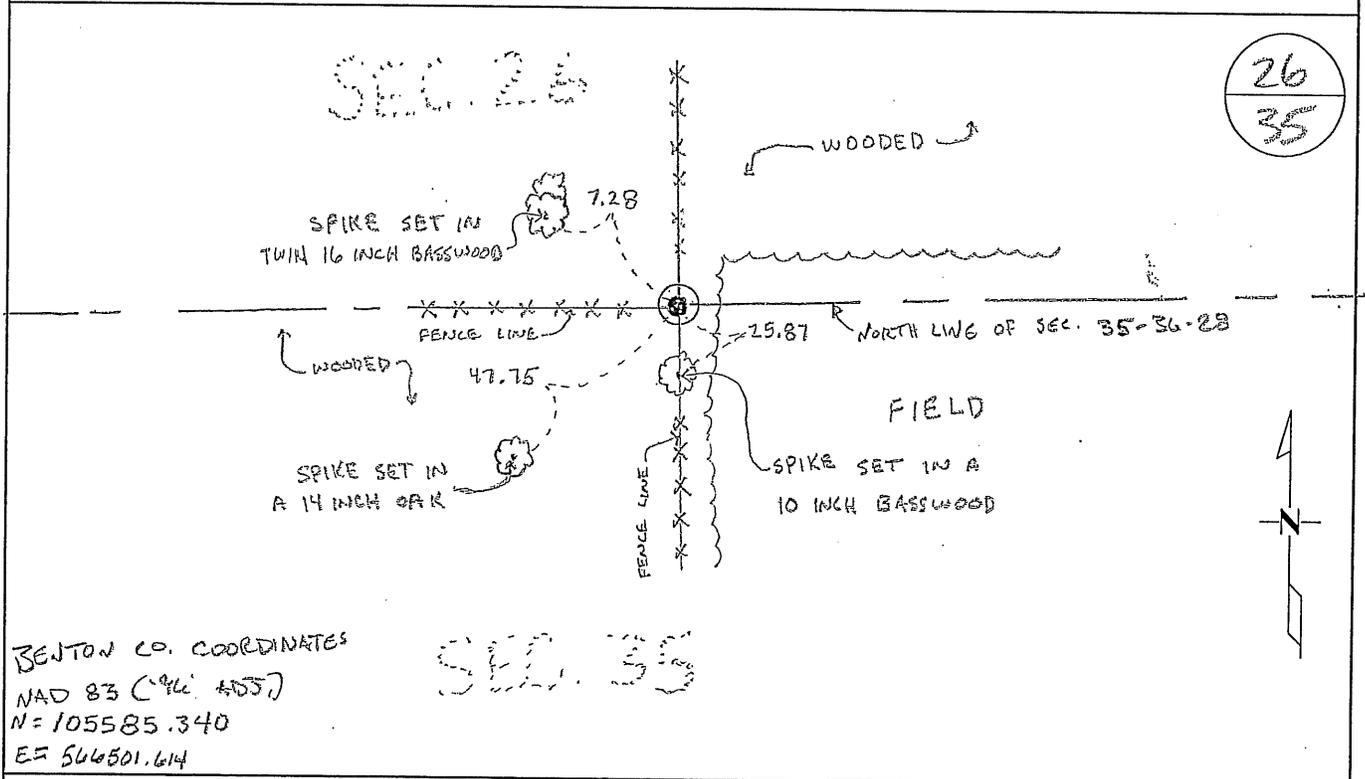

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 9/22/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:**J351**

The North Quarter of Section 35, Township 36 North, Range 28 West, Glendorado Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post with bearing trees noted as:

14" Elm	N 23 ½ W	16 links
13" Poplar	S 9 W	17 links

1988 Bruce Skipton, LS 17768, set a cast iron monument ½ foot north of a fence line west and on a fence line north/south. This location fits with measurements within the section and accepted as obliterated position. He filed a Certificate of Location (#191221).

2002 No resurvey information was found on this corner in the Benton County records.

2008 The Benton County Surveyor's Office searched and found the cast iron monument as set by Bruce Skipton in 1988. Location agrees with occupation lines running west, north and south of the corner. Accepted Skipton's position as the best evidence.

Benton County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-105585.340
 E-566501.614

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH 1/4 Corner of Section 35, Township 36N, Range 28W, 4TH P.M.

STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 19 SEPT 1988 placed a CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

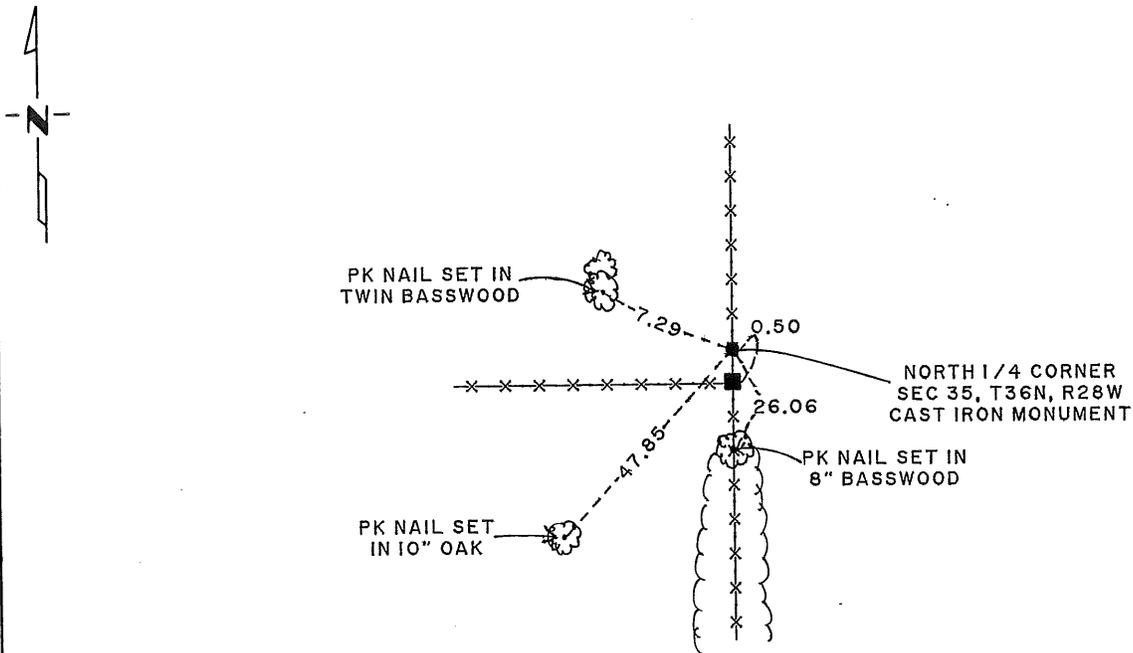

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Skipton 12-16-88
SIGNATURE DATE

Registration No. 17768

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

NORTH QUARTER CORNER, SECTION 35, T36N, R28W, 4TH P.M.

1. The original survey was accomplished in July 1855 by Oscar F. Davis.
2. Benton County's old surveyor's books provided no information for relocation of said corner.
3. On September 12, 1988, Paul E. Wellen & Associates Inc., found fence line occupations North, South and West located at said corner. We analyzed measurements from said fence line intersection, to the southeast corner of said section (cast iron monument) and to the occupation at the Southwest corner of section and accepted said fence line intersection as evidence to relocate said quarter corner. On September 19, 1988, we set a cast iron monument at said quarter corner.

19 | 22 |

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MO
CERTIFIED TO BE FILED
AND/OR RECORDED ON

JAN 12 11 41 AM '89

ALICE O. ENGELMEYER
COUNTY RECORDER

BY *Alice O. Engelmeier*