

Certified, Filed and or Recorded on
Sep. 23, 2008 AT 01:28PM

Signed: BW
MARILYN J NOVAK G V J
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 36, Township 36N, Range 28 W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 09/16/08 found a 1/2 INCH IRON PIPE CAP NO. 12684

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

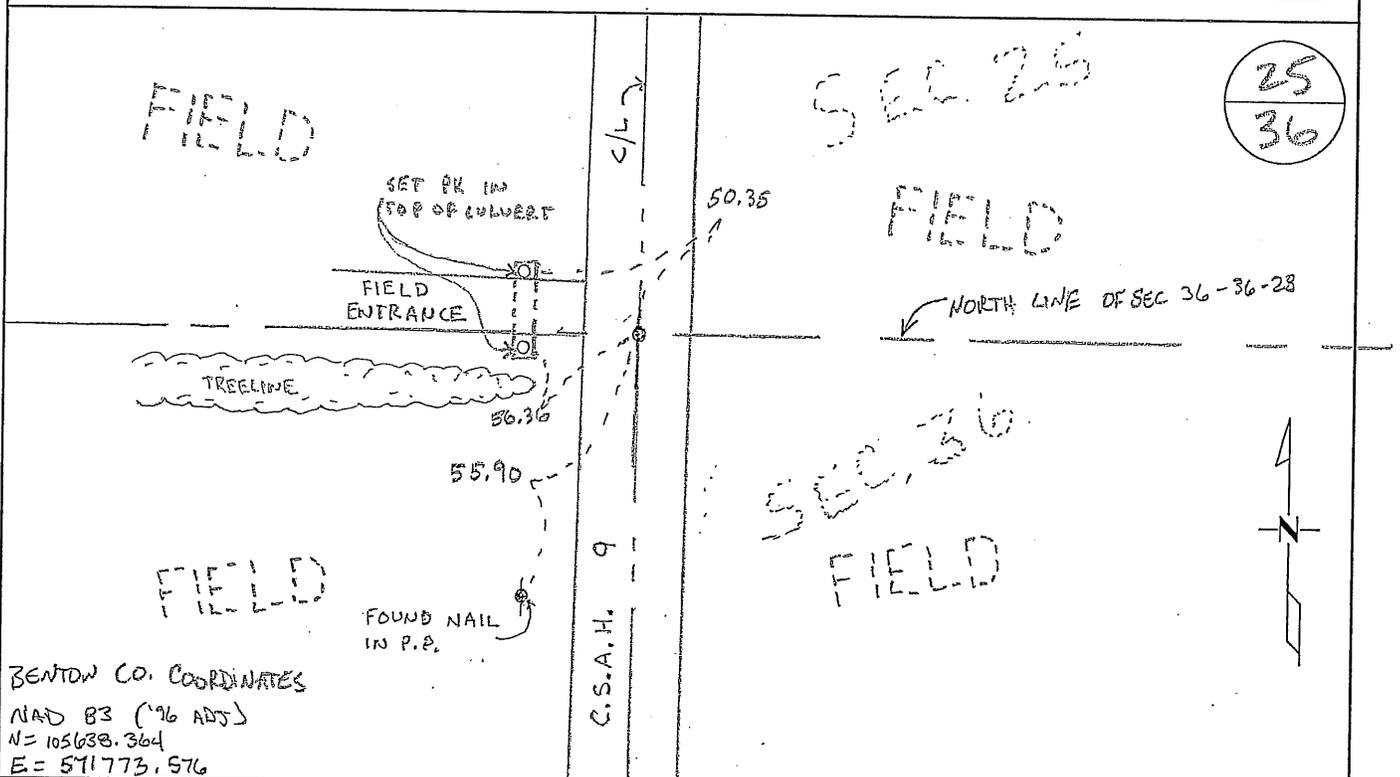

BENTON CO. COORDINATES
NAD 83 ('96 ADJ)
N = 105638.364
E = 571773.576

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Oley
Deputy Benton County Surveyor
License No. 45872

Date: 9/22/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

J361

The North Quarter Corner of Section 36, Township 36 North, Range 28 West,
 Glendorado Township, 4th Principal Meridian, Benton County, Minnesota.

- 1855 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
 8" Black Oak S 68 ½ W 13 links
- 1930 County Engineer's Notebook No. 58 shows road survey by H. G. Elletson running north to south. Corner is shown with ties same as listed in County Surveyor's Record Book 1, page 57 and page 79, which notes a hub at the corner with the following reference ties:
- | | | |
|------|----|------|
| T.P. | SE | 76.2 |
| F.P. | E | 34.8 |
- 1965 County Engineer's Notebook No. 254 contains survey for SAR No. 9 running south to north. Notes corner as a spike set. Ties:
- | | | |
|----|----|--------|
| PP | SW | 49.25' |
| TP | SE | 70.8' |
- 1979 On November 16, 1979, John Oliver, LS 8194, found a 3/8" iron rod (which fits various described parcels in the "Village of Glendorado"). He removed the iron and placed a cast iron monument at the location and filed a Certificate of Location (#155687).
- 2001 On August 28, 2001 Westwood Professional Services, Inc. found a RR Spike flush in the centerline of County road and dug under the spike by hand and found a spike with ribbon down 1 foot. Position was accepted as the same location as the CIM set by Oliver.
- 2002 Westwood Professional Services, Inc. obtained coordinates on the found spike prior to highway reconstruction. On 11/5/02 a ½ " iron pipe was set at location of the found spike after road construction.
- 2008 The Benton County Surveyor's Office found Gary Stevenson's iron monument (RLS #12684) as set in 2002, and accepts his method and position as the quarter corner between Sections 25 and 36. Ties were updated from John Oliver's 1979 Certificate of Location.

Benton County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N-105638.364
 E-571773.576

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

the North quarter Corner of Section 36, Township 36, Range 28, _____ P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On 11-16-79 ~~found~~ evidenced by a 3/8 inch iron rod which fits various described parcels in the Village of Glendorado
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a permanent marker consisting of a Benton County
DATE cast iron monument

SKETCH OF REFERENCE TIES


-N- REFER TO NEXT PAGE

Statement of evidence relative to this corner location is on back of page. #155687

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John O. Oliver April 9, 1980
SIGNATURE DATE

Registration No. 8194

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 4 P: .M. on the 14th day of April A.D., 19 80

County Recorder
Register of Deeds - T.A. Johnson

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


BENTON COUNTY

No. _____

I hereby certify that on the 16th day of November, 19 79, that I John O. Oliver
 did restore the North quarter corner of Section 36, Township 36, Range 28
 said County, which was Evidenced by a 3/8 inch iron rod which fits various described parcels in the
Reestablished by
"Village of Glendorado"

I further certify that to perpetuate the location of said corner I did at the exact location thereof place
 a permanent marker consisting of a Benton County cast iron monument

I further certify that I did establish 3 references or witness monuments as shown below. Said references
 being marked as shown by the following abbreviations: (BP = Tree with I facing painted blaze with I nail in the lower blaze.
 N = Tree, pole, etc. not blazed but with I nail in face. CF = Corner of foundation of building. CS = Corner of siding of building.)

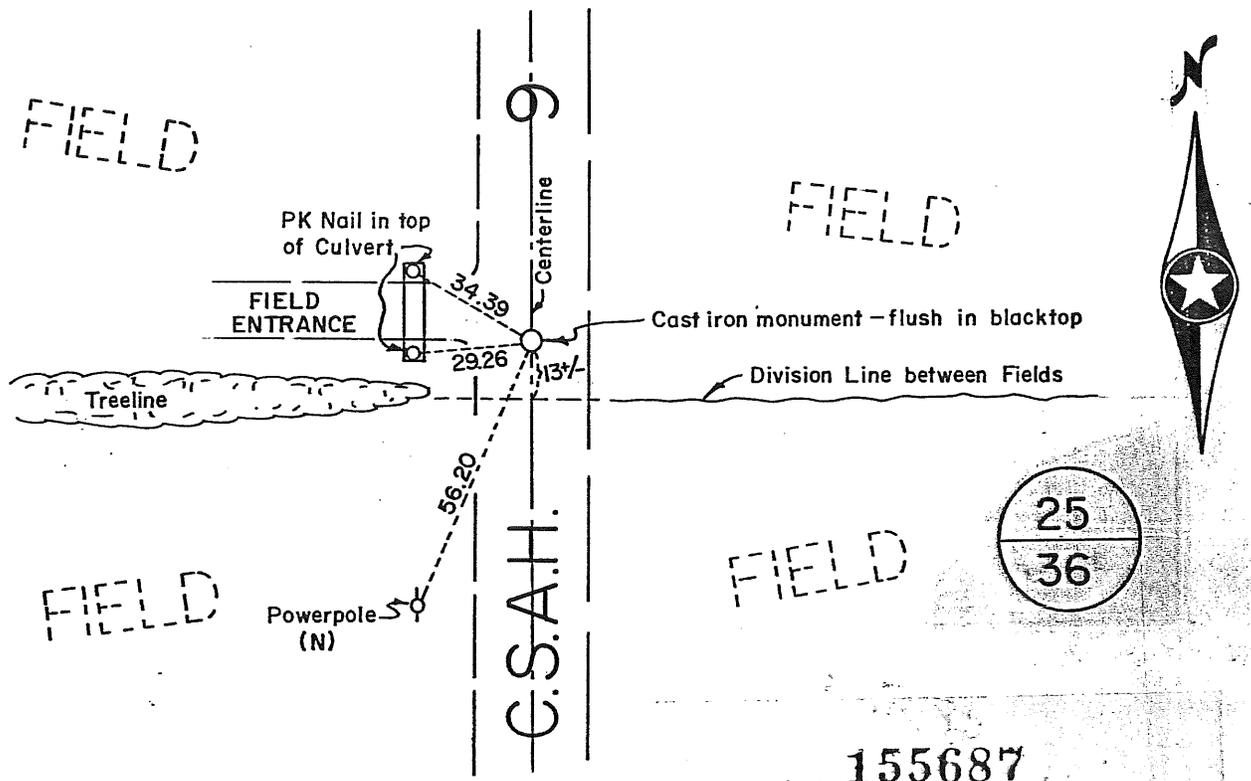

155687

County Recorder

Office of the Register of Deeds for said County:

I hereby certify that the within instrument was
 filed for record on the 14 day of April
 19 80 at 4 P.M.

Dated this 9th day of April, 19 80.
John O. Oliver
 Registered Land Surveyor No. 8194

 County Surveyor

F. E. Johnson
 Register of Deeds County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

BENTON COUNTY


No. _____

I hereby certify that on the 16th day of November, 19 79, that I John O. Oliver

and restore the North quarter corner of Section 36, Township 36, Range 28 said County, which was Evidenced by a 3/8 inch iron rod which fits various described parcels in the "Village of Glendorado" ~~Reestablished by~~

I further certify that to perpetuate the location of said corner I did at the exact location thereof place a permanent marker consisting of a Benton County cast iron monument

I further certify that I did establish 3 references or witness monuments as shown below. Said references being marked as shown by the following abbreviations: (BP = Tree with I facing painted blaze with I nail in the lower blaze. N = Tree, pole, etc. not blazed but with I nail in face. CF = Corner of foundation of building. CS = Corner of siding of building.)

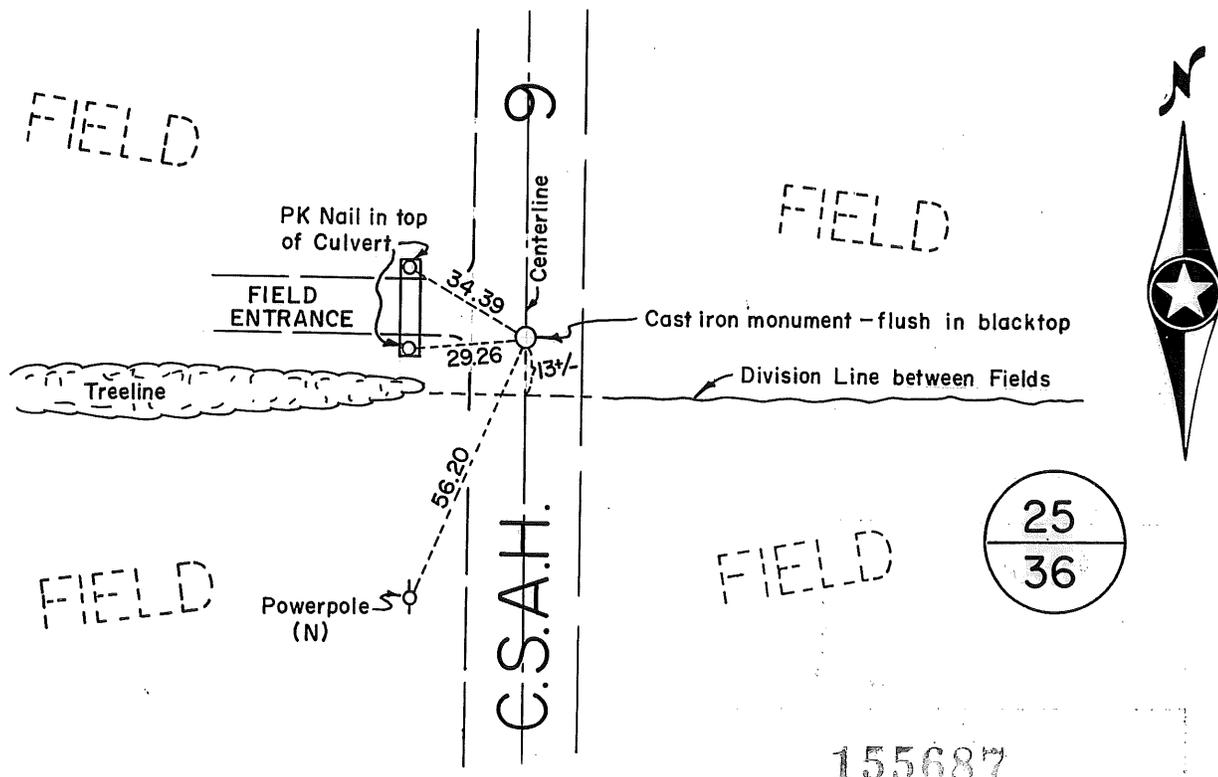

Dated this 9th day of April, 19 80.

John O. Oliver
Registered Land Surveyor No. 8194

County Surveyor

Deputy Co. Surveyor

Office of the Register of Deeds for said County:

I hereby certify that the within instrument was filed for record on the 14 day of April 19 80 at 4 P.M.

F. A. Johnson
Register of Deeds County Recorder

By _____ Depu