

Certified, Filed and or Recorded on  
Oct. 07, 2008 AT 02:42PM


Signed: BW  
MARILYN J NOVAK 5/1/1  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 3, Township 36N, Range 28W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10/01/08 found a CAST IRON MONUMENT
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

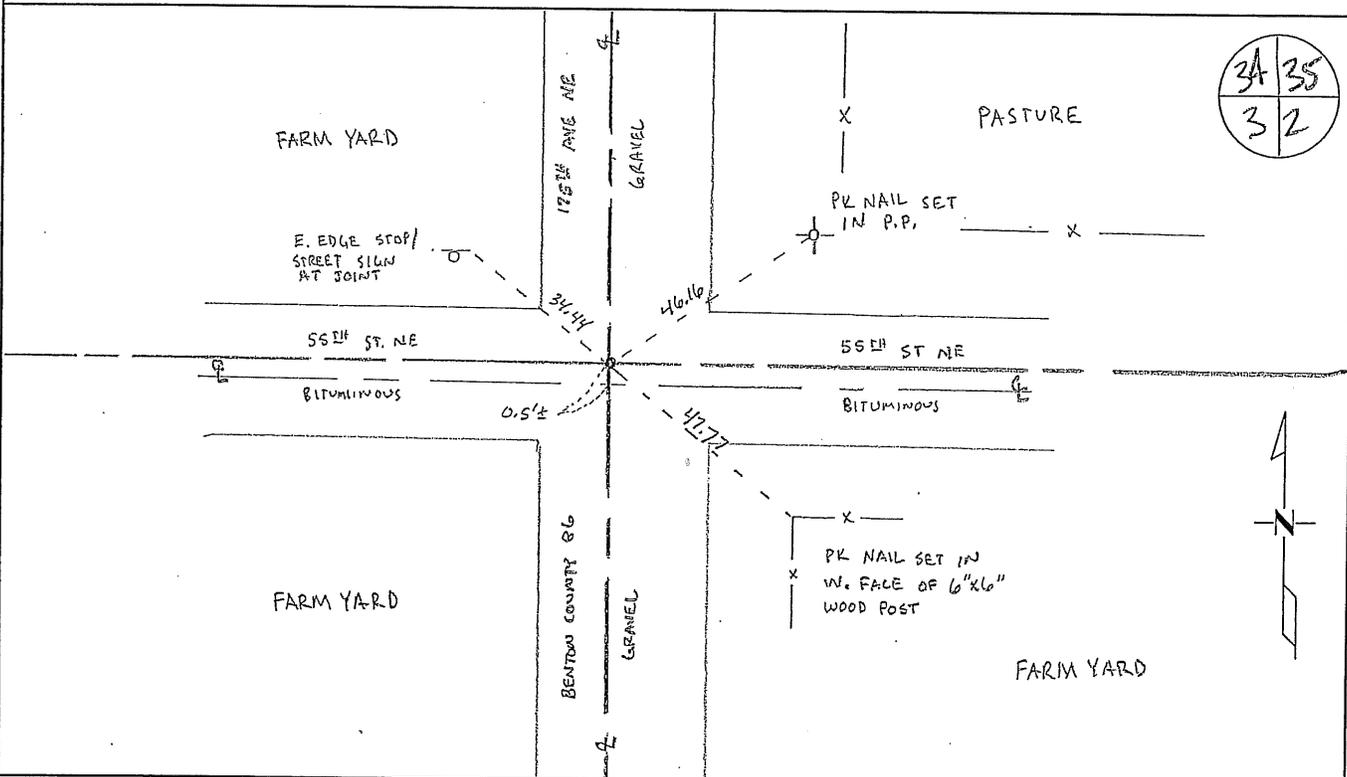

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jason W. Oley  
Deputy Benton County Surveyor  
License No. 45872

Date: 10/06/08

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

Statement of Evidence:

J032

The Northeast of Section 3, Township 36 North, Range 28 West, Glendorado Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey established this corner and set a wood post at this location and bearing trees were recorded:
- |              |            |          |
|--------------|------------|----------|
| 6" Blk. Oak  | S 28 W     | 29 links |
| 6" Elm       | N 26 1/2 W | 55 links |
| 8" Bur Oak   | N 28 E     | 40 links |
| 10" Basswood | S 72 E     | 20 links |
- 1901 County Surveyor's Record Book A, Map No. 35 shows a survey of Section 35, 37-28 by John E. Whilt.
- 1912 County Surveyor's Record Book 2, page 383 gives ties to an iron monument:
- |               |            |           |
|---------------|------------|-----------|
| TP            | N 50 1/2 E | 31 feet   |
| NW Cor House  | S 51 1/2 E | 77.3 feet |
| NE Cor School | S 64 1/2 W | 165 feet  |
- 1912 County Engineer's Notebook 1, pages 37 to 42 contains a survey for SR No. 10 by M. J. Cleveland. States corner is iron monument (Parents) in north-south road and lists same ties as above.
- 1916 County Surveyor's Record Book 1, page 11 (and on Record Book A, Map No. 21), JP Soderstrum notes an iron stake in the intersection of roads on the township line. County Surveyor's Record Book 1 page 13 also notes a survey done by in 1916. He notes the following reference ties to an iron
- |                     |            |           |
|---------------------|------------|-----------|
| TP                  | N 50 1/2 E | 47 links  |
| NW Cor House        | S 51 1/2 E | 117 links |
| NE Cor School House | S 64 1/2 W | 250 links |
- 1939 County Engineer's Notebook No. 125 contains survey of CAR 42 running east to west on township line. Corner is shown as an iron in center of 4-way road intersection. Ties:
- |                |    |       |
|----------------|----|-------|
| FP             | NE | 41.35 |
| 18" Cottonwood | SE | 41.45 |
- 1939 County Engineer's Notebook No. 123 contains survey of CAR 39 running south to north on section line with survey terminating at this corner. Same information as in Notebook No. 125.
- 1979 Paul Wellen, LS 10461, set a cast iron monument at the location of a found red head in the centerline of County Road 51 and County Road 67. He filed a Certificate of Location (#155138). He gives a tie of 78.78 feet SE to NW corner of House.
- 2003 Westwood Professional Services, Inc. found a cast iron monument and obtained coordinates. Corner appears to be good but still need to check for 1912 and 1916 ties. Wellen's 1979 ties show NW corner of House SE 78.78. (Soderstrum's tie: 77.22 feet)
- 2008 The County Surveyor's Office searched and found a cast iron monument as set by Wellen in 1979. The Surveyor did not find remains of the 1912 and 1916 ties. Position agrees with centerline intersection of north-south and east-west roads. Wellen's 1979 tie to "NW corner of house" agrees with 1912 ties. Position is accepted as marking the obliterated position. Ties were updated.

County Coordinates by GPS to CIM  
 NAD 83 (1996 Adjustment)  
 N- 132731.683  
 E- 563418.335

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast \_\_\_\_\_ Corner of Section 3, Township 36, Range 28, \_\_\_\_\_ P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On 8-22-79 found a red-head in the centerline intersections of County Road No. 51 and County Road No. 67.

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a permanent marker consisting of Benton County Cast Iron Monument

### SKETCH OF REFERENCE TIES



Refer to next page

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Paul E. Muelken  
SIGNATURE \_\_\_\_\_ DATE \_\_\_\_\_

Registration No. 10461

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE REGISTER OF DEEDS

County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 9 A.M. on the 1st day of February A.D., 1980

Register of Deeds F.A. Johnson

By \_\_\_\_\_, Deputy

DOCUMENT NO. 155138

