

MARILYN J. NOVAK  
COUNTY RECORDER  
BY CK DEPUTY

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

293714

2002 DEC 31 P 3:55

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 19, Township 36, Range 28  
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 11/7/2002 found a tipped over, 1' X 1' X 2' pointed rock, down 5.5 feet  
DATE

left monument as found     lowered monument     removed monument (explain)

On 12/4/2002 placed a spike at location of rock  
DATE

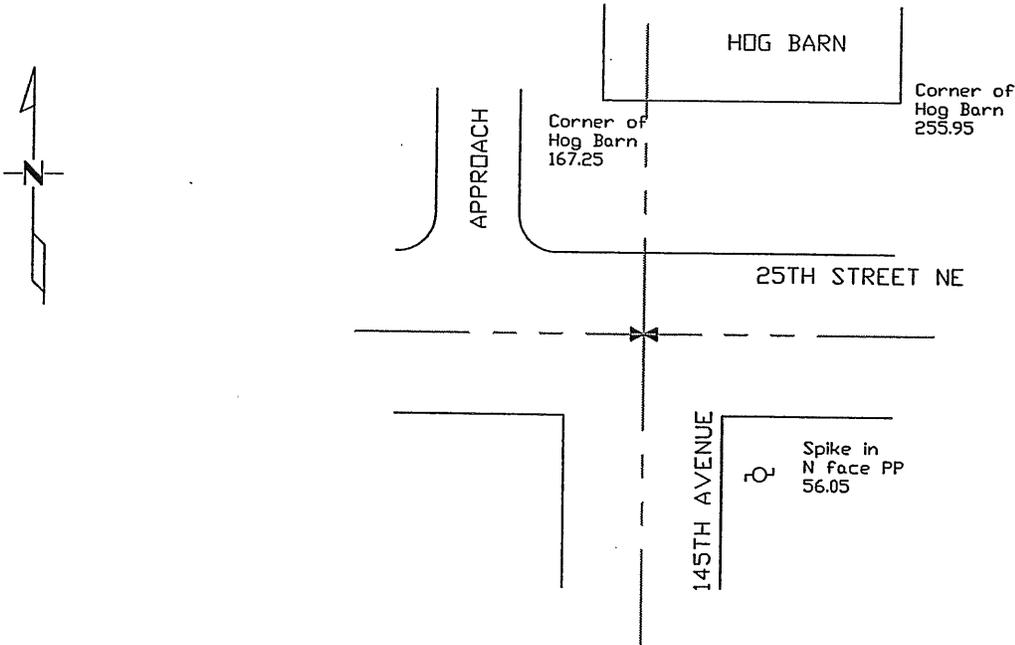

New ties are to the head of a nail.

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature] Date 12/12/02 License No. 12684

Title:  Land Surveyor     Professional Engineer     County Surveyor     County Engineer

Statement of Evidence:

J192

The Northeast Corner of Section 19, Township 36 North, Range 28 West, Glendorado Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Corner established by GLO and marked by a wood post with bearing trees noted as.

16" Bur Oak	S 46 ¼ E	70 links
10" Bur Oak	N 50 W	130 links

1915 The County Surveyors records in Book 1, page 45 and 46, shows that on June 1, 1915, J.P. Soderstrum did a survey of Section 19. At the corner he found a wood stake in centerline of road set by Parent in 1889 and is claimed to be the old Government location by residents. Took new ties:

12" Elm	S 86 W	23 links
14" Elm	N 1-05 E	65 links

No Date County Highway Department notes show stake with pointed rock on top with the following ties:

14" Elm	North	42.6
T.P.	NW	92.6
14" Elm	NE	43.3
F. P.	NE	48.0

2002 On November 7, 2002 Westwood Professional Services, Inc. dug with a backhoe in center of roads east-west and south. A 8'X 8' hole was excavated and down 5.5 feet found a 1'x 1'x 2' tall pointed rock, which was lying on its side, near the intersection of the centerlines from the south and east. We also found many field stones and wood scraps in the hole, but we did not find the stake that the rock was supposed to be sitting on top of. We accepted the stone as a perpetuated position of the original corner. We set a spike at the surface above the location of the found rock and established ties.

County Coordinates  
NAD 83 (1996 Adjustment)  
N-116342.758  
E-547900.084