

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 23, Township 36, Range 28, 4<sup>th</sup> P.M.

STATE OF MINNESOTA, County of Benton


At the corner location shown on the sketch:

On 5-18-88 found a 1/2" Iron Pin  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 5-18-88 placed a Benton County Cast Iron Monument  
DATE

### SKETCH OF REFERENCE TIES

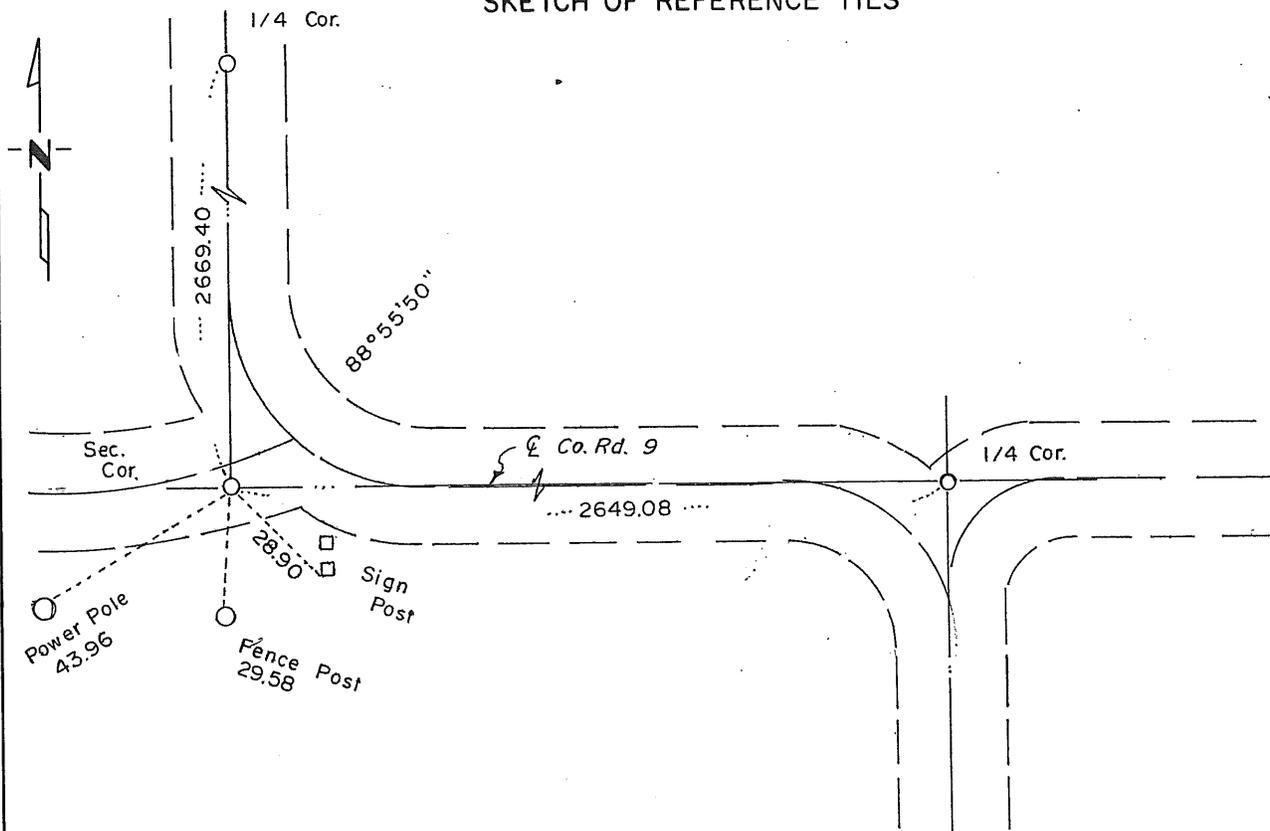

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Larson 12/15/88  
SIGNATURE DATE

Registration No. 9394

Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS  
County of \_\_\_\_\_

I hereby certify that this document was filed in the Reg. of Deeds office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

Register of Deeds \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

Benton County Road Survey shows Section Corner to be 1/2" iron pin.

5-21-65 Dept. of Natural Resources found the 1/2" iron pin and stated the distance from said Section Corner to 1/4 Corner as being 2648.30 feet.

191247

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 12 11 59 AM '89

ALICE C. ENGELBREYER  
COUNTY RECORDER

BY *[Signature]* DEPUTY