

Certified, Filed and or Recorded on  
Oct. 07, 2008 AT 02:50PM


Signed: BW  
MARILYN J NOVAK B V  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 26, Township 36N, Range 28W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 9/29/08 found a SPIKE BELOW BITUMINOUS OF STATE HIGHWAY 95, FIT SKIPTON'S TIES.
- left monument as found       lowered monument       removed monument (explain)
- On 09/29/08 placed an PK NAIL WITH BENTON COUNTY SURVEYOR DISK

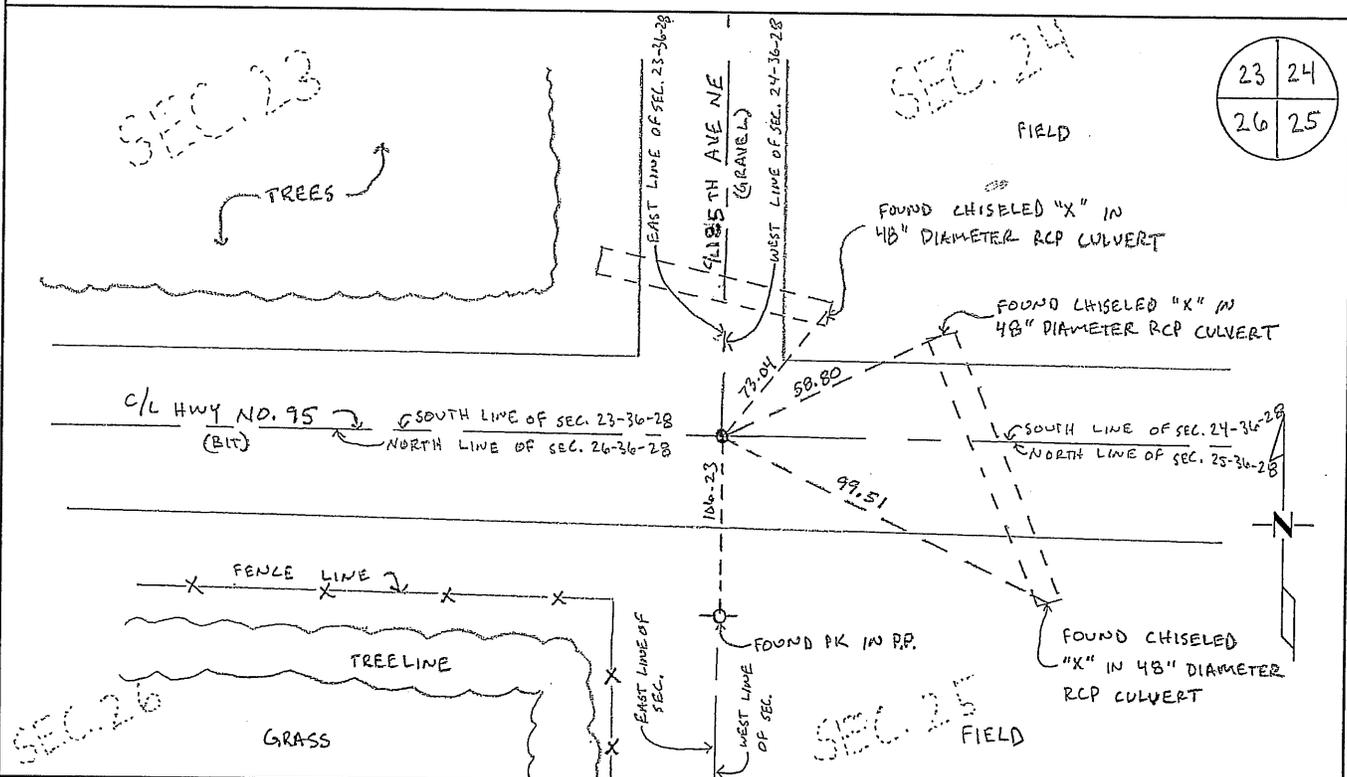

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oley  
Deputy Benton County Surveyor  
License No. 45872

Date: 10/06/08

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

J262

The Northeast Corner of Section 26, Township 36 North, Range 28 West, Glendorado Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post with bearing trees noted as:

14" Blk Ash	N 19 E	456 links
16" Elm	S 34 W	533 links

1914 County Surveyor's Record Book 1, page 59, and Record Book A, Map No. 19 contains a survey by of Section 23 by JP Soderstrum. He notes he found old post in center of road. Mr. Ambretson claims the post to be in original location of old corner. He set a stone on end for corner.

Newer ties by County Highway Department on same page:

Fen Cor	NW	31.3
Fen Cor	NE	47.9

1970's Roll E-4, of MN/DOT Highway plans for TH 95, shows the corner was assumed at the center of roads north, east, and west.

1988 Bruce Skipton, LS 17768, found a large spike at the centerline of roads north/east/west that fit with MN/DOT's assumed location. He set a cast iron monument over the spike and filed a Certificate of Location (#191326).

2008 The County Surveyor's Office searched and found a railroad spike below the bituminous on State Highway 95. The position fits Skipton's ties from 1988 and aligns with an old fence line trailing south of the Highway. The Surveyor accepted Skipton's position and set a PK nail with a washer flush with the surface and ties were updated.

County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-110902.718  
 E-569077.932

NOTE: It is recommended that the stone monument referenced in County Surveyor's Record Book 1, page 59, and Record Book A, Map No. 19, by JP Soderstrum, be searched for during any future State Highway 95 construction in this area.

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 26, Township 36N, Range 28W, 4TH P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On 12. Sept. 1988 found a Large Spike  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 19 SEPT 1988 placed a CAST IRON MONUMENT  
DATE

## SKETCH OF REFERENCE TIES

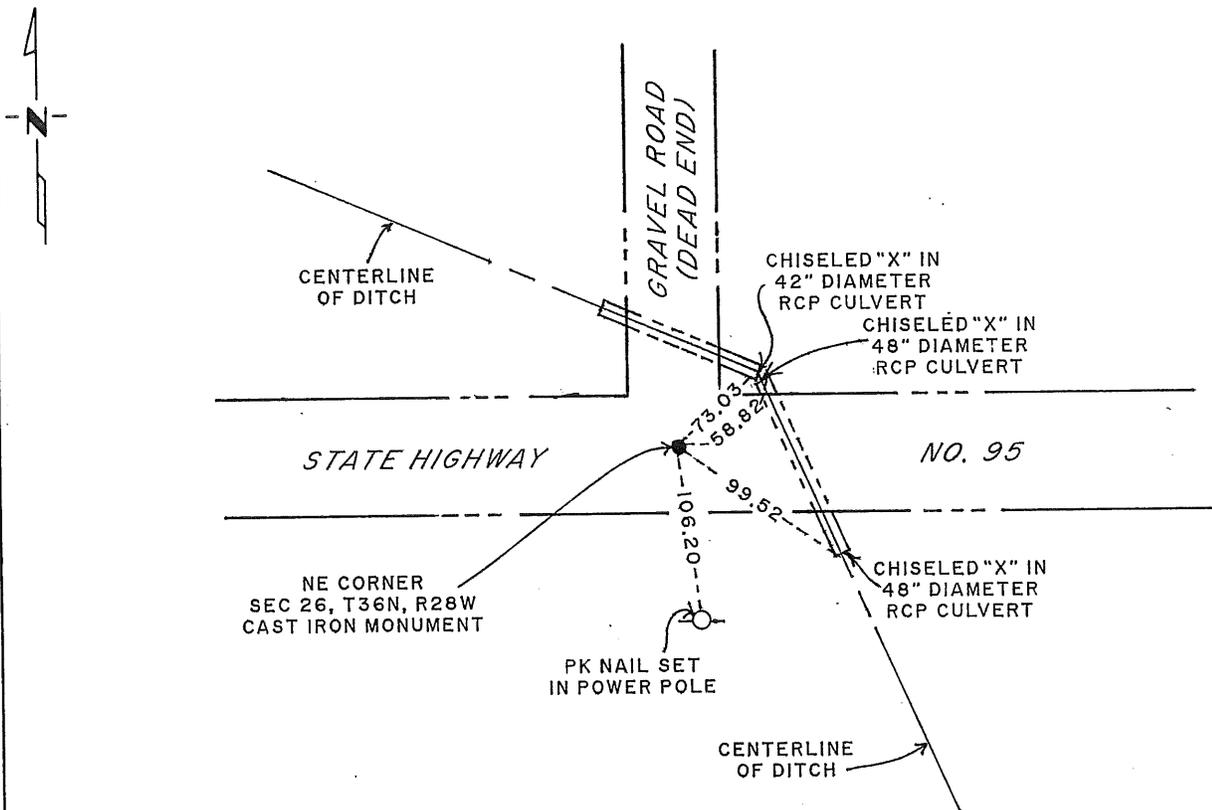

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Skjott 12-17-88  
SIGNATURE DATE

Registration No. 17768

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

NORTHEAST CORNER, SECTION 26, T36N, R28W, 4TH P.M.

1. The original survey was accomplished in July 1855 by Oscar F. Davis.
2. Benton County old surveyor's books indicated a monument in place with reference ties, at said corner.
3. MNDOT T.H. R/W map indicated that said corner was assumed.
4. September 12, 1988, Paul E. Wellen & Associates Inc., searched at the location of MNDOT assumed section corner and found a large spike in place.
5. September 19, 1988, we set a cast iron monument over the large spike.

191326

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 20 8 45 AM '89

ALICE S. BRIDGEMAN  
COUNTY RECORDER

BY Ab DEPUTY