


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 29, Township 36, Range 28, 4th P.M.  
 STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On 10/01/1997 found a 3/4" iron pin  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 10/01/1997 placed a MHD cast iron monument  
DATE

### SKETCH OF REFERENCE TIES

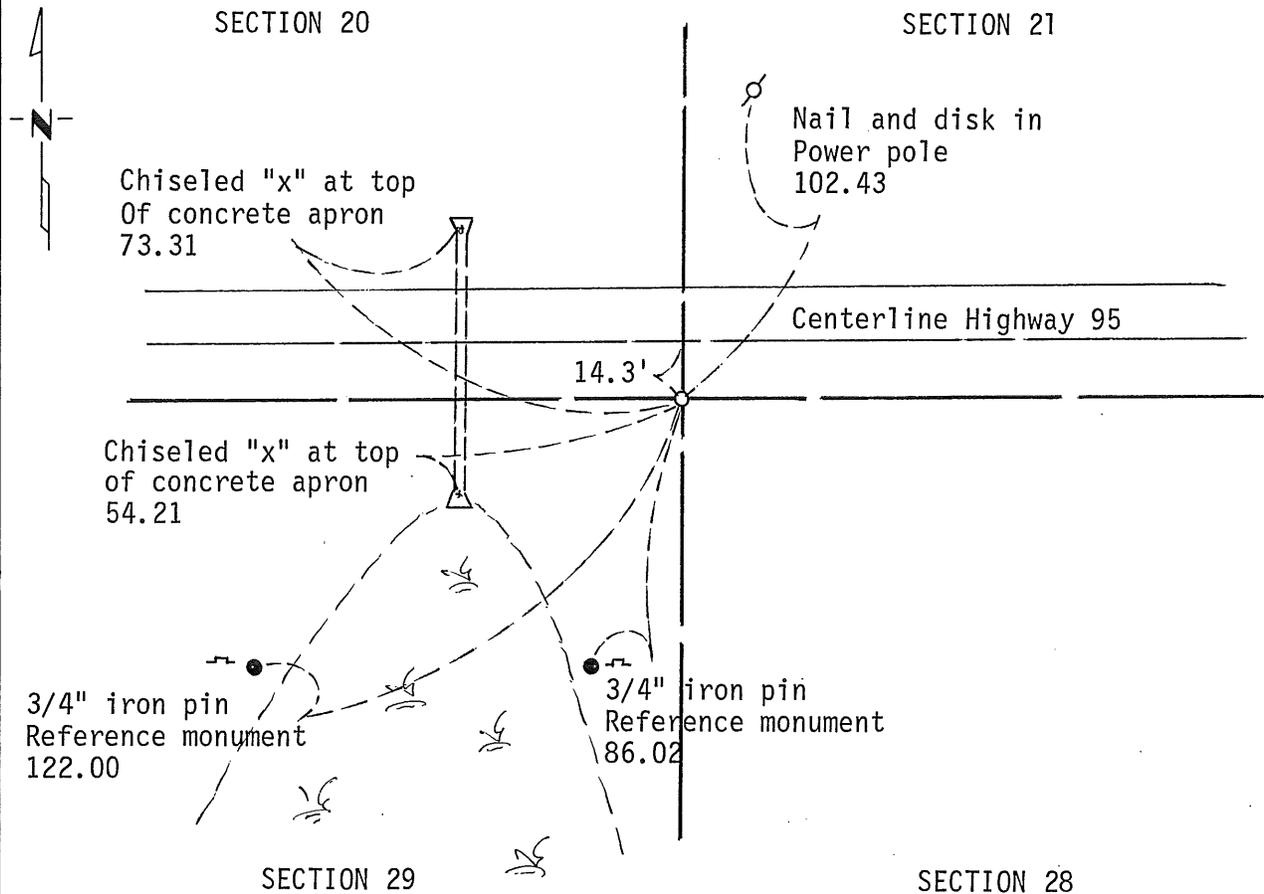

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielsen 4/12/99  
SIGNATURE DATE

Registration No. 11865

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

#### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

NORTHEAST CORNER OF SECTION 29, TOWNSHIP 36 NORTH,  
RANGE 28 WEST, BENTON COUNTY, MINNESOTA

The original public land survey was run in 1855 and a wood post was set to mark the corner.

In 1942, the Minnesota Highway Department notes (Book #89 pages 1-35) call for a field stone in place 4.0 feet below the surface at the intersection of the east-west road and fence lines north and south. Crews placed a lath and hub over the stone and made three reference ties to the fence posts.

In 1949, the Minnesota Highway Department recovered the hub and three reference ties (Book #91, pages 1-22).

In 1966, the Minnesota Highway Department notes call for a 1/2-inch iron pin six inches below the surface over a field stone 4.0 feet below the surface (Book #152).

In 1970, the Minnesota Highway Department notes call for an iron pin seven inches below the surface and three iron pin reference ties made prior to road construction (Book #93).

In 1972, the Minnesota Highway Department notes call for setting an iron pin for the corner from the 1970 reference ties and making four additional reference ties (Book #94).

In 1997, the Minnesota Department of Transportation recovered the iron pin at the corner, one 1970 reference tie and two 1972 reference ties. The iron pin was replaced with a MHD cast iron monument.

For details and survey analysis contact the Minnesota Department of Transportation Surveys Office in Baxter.

261578

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

OCT 6 8 37 AM '99

ALICE C. ENGELBAYER  
COUNTY RECORDER

BY BW DEPUTY