

Certified, Filed and or Recorded on
Sep. 23, 2008 AT 01:27PM


Signed: BW
MARILYN J NOVAK G V R
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 35, Township 36 N, Range 28 W
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 09-16-08 found a BROKEN CAST IRON MONUMENT
- left monument as found lowered monument removed monument (explain)
- On 9-16-08 placed an 1/2" x 14" I.P. CAPPED "RLS 45872" OVER BROKEN
C.I.M.

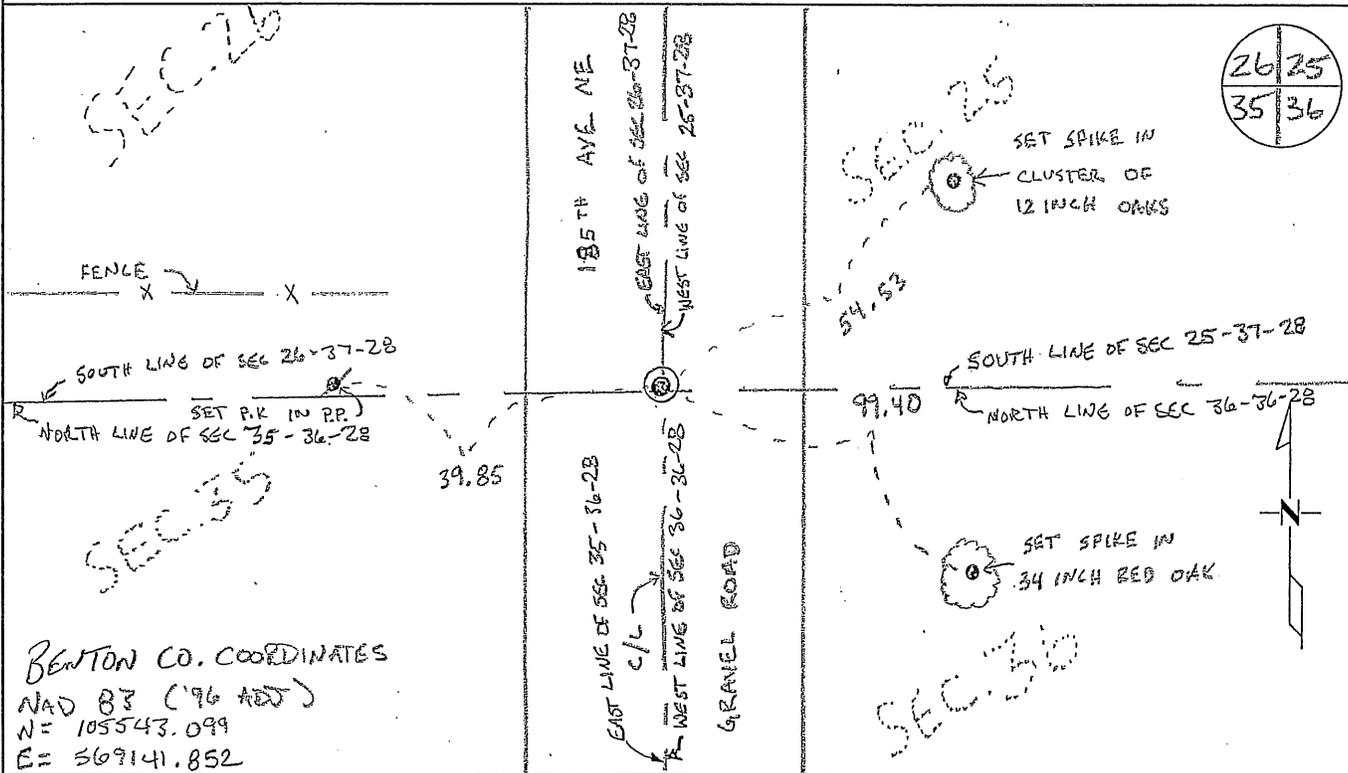

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oles
Deputy Benton County Surveyor
License No. 45872

Date: 9/22/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

J352

The Northeast Corner of Section 35, Township 36 North, Range 28 West, Glendorado Township, 4th Principal Meridian, Benton County, Minnesota.

1855 Original US General Land Office survey set a wood post with bearing trees noted as

24" W Oak	S 7 E	53 links
13" W Oak	N 84 W	25 links

1979 John Oliver, LS 8194, reestablished the corner at a fence line east and the centerline of a road north/south. This location was verified by testimony and comparison of old survey distances. He set a cast iron monument and filed a Certificate of Location (#155686).

2002 No resurvey information was found on this corner in the Benton County records.

2008 The Benton County Surveyor's Office searched and found John Oliver's cast iron monument broken off at the top in the centerline of the north-south gravel road (185th Ave N.E.). Location fits occupation lines running the east and west. Accepted Oliver's cast iron monument as the best evidence and set a 1/2" x 14" iron pipe capped "RLS 45872" over said monument and set new ties.

Benton County Coordinates obtained from GPS
 NAD 83 (1996 Adjustment)
 N-105543.099
 E-569141.852

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 35, Township 36, Range 28, _____ P.M.

STATE OF MINNESOTA, County of Benton
reestablished at the intersection of a
fence line East with the centerline of a North-South township road. Said
At the corner location shown on the sketch: location verified by area residents testi-
mony and comparison with old survey distances and other lines of occup-
ation. On 11-16-79 found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 11-16-79 placed a a Benton County cast iron monument
DATE

SKETCH OF REFERENCE TIES



REFER TO NEXT PAGE

Statement of evidence relative to this corner location is on back of page. #155685

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John O. Oliver April 9, 1980
SIGNATURE DATE

Registration No. 8194

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

County Recorder

OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 4 P: _____ .M. on the 14th day of April A.D., 19 80

County Recorder
Register of Deeds J.R. Johnson

By _____, Deputy

DOCUMENT NO. 155685

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

BENTON COUNTY

No. _____

I hereby certify that on the 16th day of November, 19 79, that I John O. Oliver

did restore the Northeast corner of Section 35, Township 36, Range 28

of Benton County, which was ~~Evidenced by~~ Reestablished by ~~_____~~ at the intersection of a fence line East with the centerline of a North-South township road. Said location verified by area residents testimony and comparison with old survey distances and other lines of occupation.

I further certify that to perpetuate the location of said corner I did at the exact location thereof place permanent marker consisting of _____ a Benton County cast iron monument

further certify that I did establish 3 references or witness monuments as shown below. Said references being marked as shown by the following abbreviations: (BP = Tree with I facing painted blaze with I nail in the lower blaze. I = Tree, pole, etc. not blazed but with I nail in face. CF = Corner of foundation of building. CS = Corner of siding of building.)

FIELD

Cluster of 10 inch Ash (BP)

90.40

Road
Centerline
Town

Cast iron monument - down 0.5 ft.

44.15

14 inch Red Oak (BP)


WOODS

Fence

YARD

100.00

26 inch Red Oak (BP)



155686

County Recorder

Office of the Register of Deeds for said County:

I hereby certify that the within instrument was filed for record on the 14 day of April 19 80 at 4 P.M.

dated this 9th day of April, 19 80

John O. Oliver
Registered Land Surveyor No. 8194

F. E. Johnson
Register of Deeds County Recorder

County Surveyor

Deputy Co. Surveyor

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

BENTON COUNTY


No. _____

I hereby certify that on the 16th day of November, 19 79, that I John O. Oliver and restore the Northeast corner of Section 35, Township 36, Range 28 said County, which was ~~Evidenced by~~ Reestablished by at the intersection of a fence line East with the centerline of a North-South township road. Said location verified by area residents testimony and comparison with old survey distances and other lines of occupation.

I further certify that to perpetuate the location of said corner I did at the exact location thereof place a permanent marker consisting of a Benton County cast iron monument

I further certify that I did establish 3 references or witness monuments as shown below. Said references being marked as shown by the following abbreviations: (BP = Tree with | facing painted blaze with | nail in the lower blaze. N = Tree, pole, etc. not blazed but with | nail in face. CF = Corner of foundation of building. CS = Corner of siding of building.)

FIELD

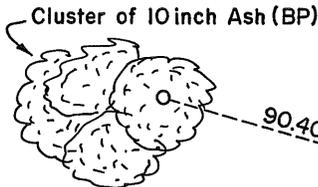

Road

Centerline

Town

Cast iron monument - down 0.5 ft.

44.15

14 inch Red Oak (BP)


WOODS

Fence

YARD

100.30

26 inch Red Oak (BP)



155686

County Recorder

Office of the ~~Register of Deeds~~ for said County:

I hereby certify that the within instrument was filed for record on the 14 day of April 19 80 at 4 P.M.

F. E. Johnson
Register of Deeds x County Recorder

By _____ Dept

Dated this 9th day of April, 19 80.

John O. Oliver
Registered Land Surveyor No. 8194

County Surveyor

Deputy Co. Surveyor