

Certified, Filed and or Recorded on  
Oct. 07, 2008 AT 02:43PM


Signed: BW  
MARILYN J NOVAK  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTH QUARTER Corner of Section 32, Township 36, Range 28  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 09/29/08 found a CAST IRON MONUMENT
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

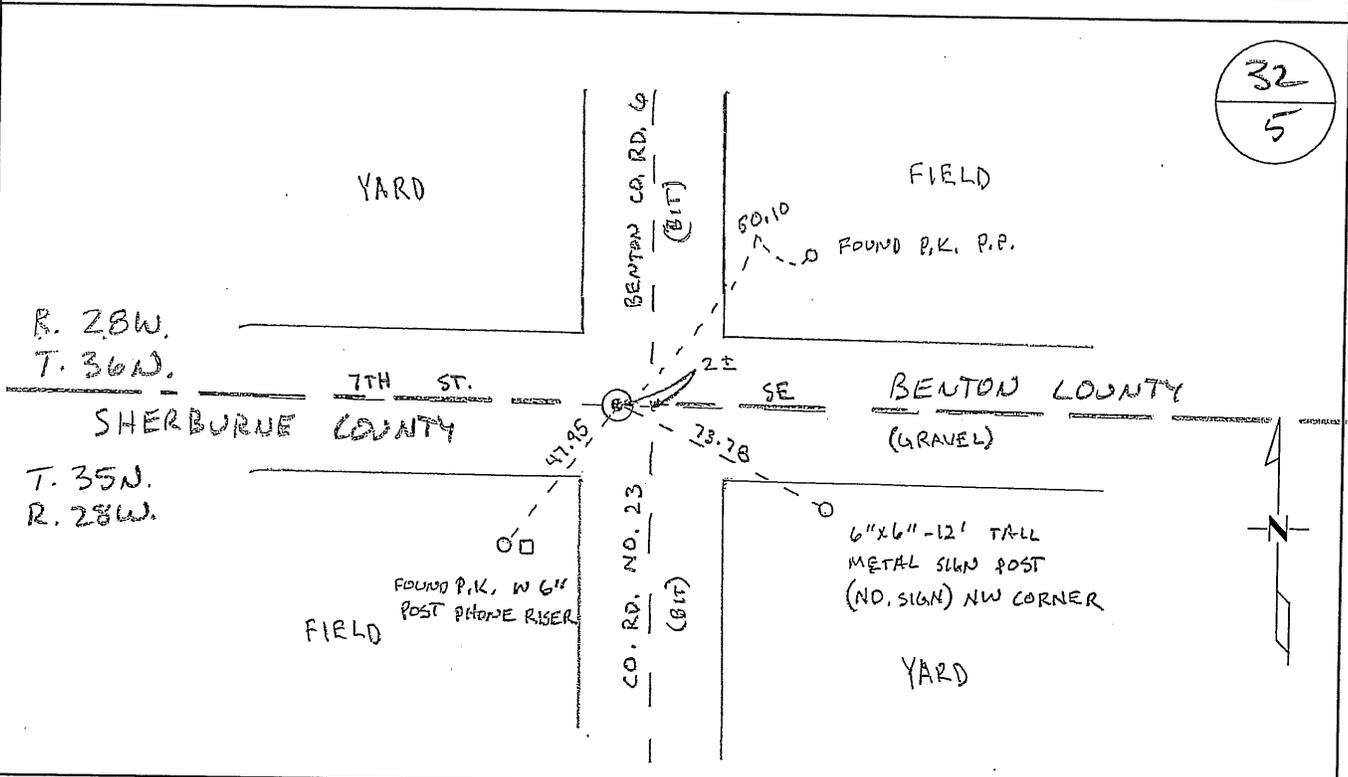

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Jan W. Oleg  
Deputy Benton County Surveyor  
License No 45872

Date: 10/06/08

Benton County Surveyor's Office  
 Jason W. Oberg, Deputy County Surveyor  
 Minnesota License No. 45872

**Statement of Evidence:**

J325

South Quarter Corner of Section 32, Township 36 North, Range 28 West, Glendorado Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a post in a mound to mark this corner location. He left a pit 6 links east.
- 1914 County Road Book, page 133 shows a survey for State Road No. 11 running north on  $\frac{1}{4}$  line from this corner.
- 1917 County Surveyor's Record Book 1, page 7, contains survey notes by N. Drolson of survey for judicial road between Sherburne and Benton Counties. He states that he set this corner equal distant between section corners, which fell in the center of north-south road. He set a stake with new ties: Br. Oak N 20 W 302 links and corner fence SE 76 links. Gives distance of 80.18 chains (5291.88 feet) for the section line.
- 1924 County Engineer's Notebook No. 37 shows survey of SR No. 6 running north from this corner. Ties:
- |            |    |       |
|------------|----|-------|
| Cor. F. P. | SE | 41.6' |
| Cor. F. P. | W  | 32.9' |
- Ties also listed in County Surveyor's Record Book 1, page 71.
- 1972 John Oliver, LS 8194, Sherburne County Surveyor, found a spike set by Benton County in road intersection and set a cast iron monument and filed Certificate of Location.
- 1992 Sherburne County Surveyor found a cast iron monument based on previous Certificate.
- 2000 Sherburne County Surveyor found CIM and updated Certificate.  
 County Coordinates converted from Sherburne County Coordinates:  
 NAD 83 (1986 Adjustment)  
 N- 100384.89  
 E- 550566.10

NOTE: Based on Sherburne County coordinates corner is 8 feet west of the lost position measuring 5297.7 feet for the line.

- 2008 The County Surveyor's Office searched the lost position referenced above and found no observable evidence. The cast iron monument, as set by John Oliver in 1972, was found and accepted as the best evidence. Ties were updated.

Benton County Coordinates obtained by GPS  
 NAD 83 (1996 Adjustment)  
 N-100385.201  
 E-550565.598