

Certified, Filed and or Recorded on  
Oct. 07, 2008 AT 02:52PM

Signed: BW  
MARILYN J NOVAK  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 33, Township 36, Range 2B  
4TH Principal Meridian, State of Minnesota, County of Benton


At the corner location shown on the sketch:

On 9-25-08 found a CAST IRON MON.

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

33  
4

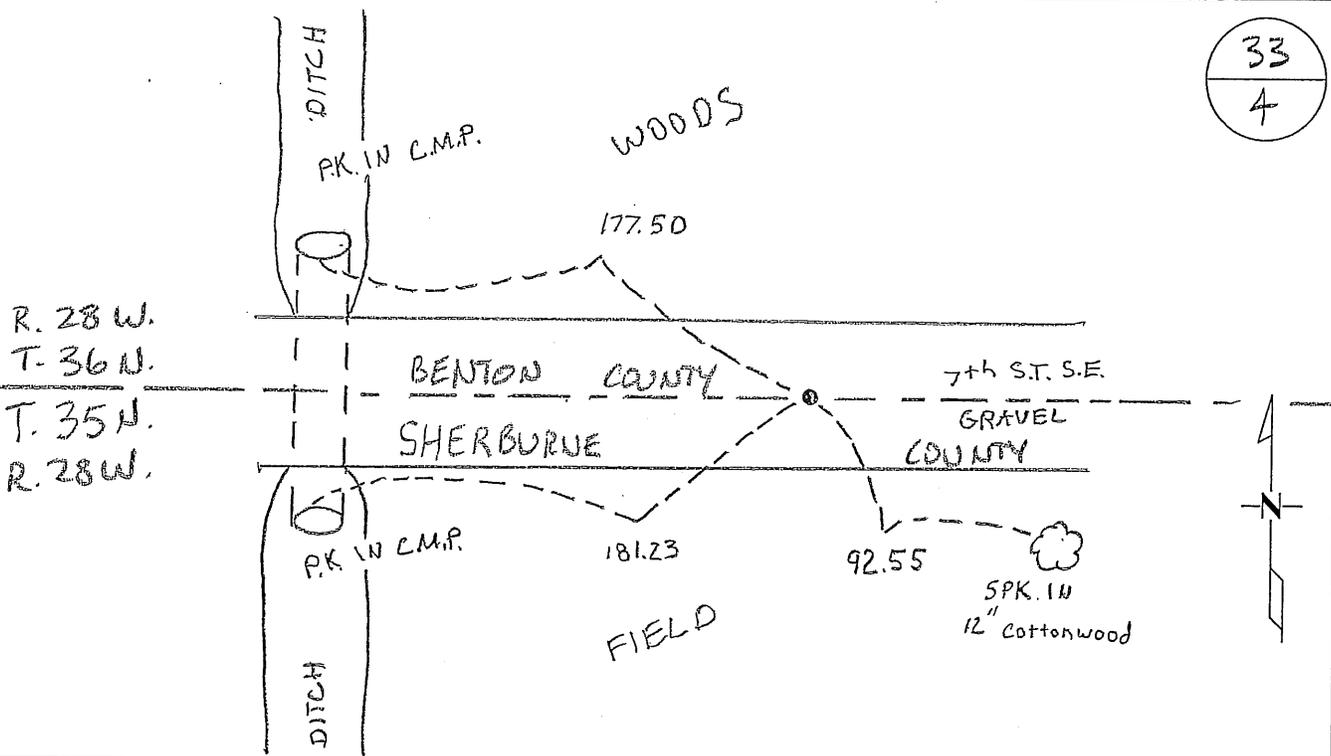

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature James W. O'Leary  
Deputy Benton County Surveyor  
License No. 45872

Date: 10/06/08

PAGE 1 OF 2

Benton County Surveyor's Office  
Jason W. Oberg, Deputy County Surveyor  
Minnesota License No. 45872

**Statement of Evidence:**

J335

South Quarter Corner of Section 33, Township 36 North, Range 28 West, Glendorado Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a post in a mound to mark this corner location with a pit 6 links east.  
A line tree was noted as an 12" W Oak East 20.08 chains.
- 1917 County Surveyor's Record Book 1, page 7, contains survey notes by N. Drolson of survey for judicial road between Sherburne and Benton Counties. He states that he set post for this corner lost between section corners with a distance of 40.25 chains (2656.5 feet) to section corners.
- 1976 John Oliver, LS 8194, Sherburne County Surveyor, found a 1-foot long rotted wood stake down 2 feet below road grade. Stake fit the lost position and he set a cast iron monument and filed Certificate of Location (Doc. No. 140247-Sherburne).
- 2000 Sherburne County Surveyor found CIM and updated Certificate.  
Benton County Coordinates converted from Sherburne County Coordinates:  
NAD 83 (1986 Adjustment)  
N- 100362.29  
E- 555874.48
- 2005 Sam DeLeo, LS , found CIM and obtained County Coordinates by GPS.  
NAD 83 (1996 Adjustment)  
N- 100362.550  
E- 555873.844
- 2008 The Benton County Surveyor's Office searched and found the cast iron monument as set over the wood stake in 1976 by John Oliver. The corner falls 2.48 ft. west of a lost position. The position gives distances to the SW and SE corners of 2651.25 ft. and 2656.05 ft., respectively. The Surveyor accepted the monument and updated ties.
- Benton County Coordinates obtained by GPS  
NAD 83 (1996 Adjustment)  
N- 100362.585  
E- 555873.924