

Certified, Filed and or Recorded on
Oct. 07, 2008 AT 02:52PM


Signed: BW
MARILYN J NOVAK 6 V 1
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 35, Township 36, Range 28
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 9-25-08 found a CAST IRON MON
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

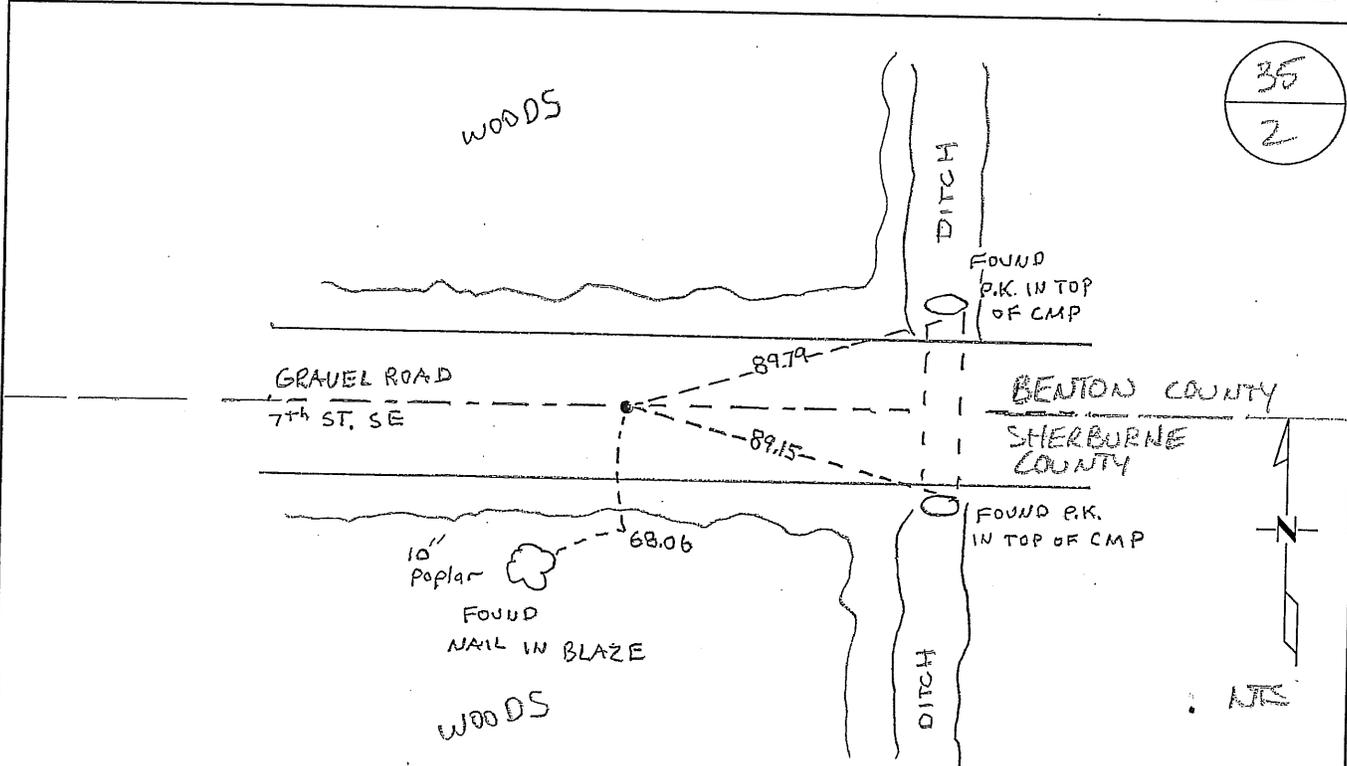

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Joe W. Oly
Deputy Benton County Surveyor
License No. 45872

Date: 10/06/08

Benton County Surveyor's Office
 Jason W. Oberg, Deputy County Surveyor
 Minnesota License No. 45872

Statement of Evidence:

J355

The South Quarter Corner of Section 35, Township 36 North, Range 28 West, Glendorado Township, 4th Principal Meridian, Benton County, Minnesota.

- 1849 Original US General Land Office survey set a post for this corner and bearing trees were recorded:
- | | | |
|------------|---------|-----------|
| 10" Elm | N 4 ¾ W | 121 links |
| 8" Blk Ash | N 62 E | 140 links |
- A line tree was noted as a 14" W Oak West 26.55 chains.
- 1917 County Surveyor's Record Book 1, page 7 contains survey notes by N. Drolson of survey for judicial road between Sherburne and Benton Counties.
- 1975 John Oliver, LS 8194, Sherburne County Surveyor, found a stone as mentioned in notes by S. L. Kennedy in 1917. Stone was found leaning. Stone was straightened and tied out. Iron pipes were set on the north and south sides flush with the stone.
- 2000 Sherburne County Surveyor placed a CIM over the granite monument and updated the Certificate of Location.
- 2004 Certificate of Survey by David Regan, LS 12236, shows CIM at corner 2669.36 feet east of the SW corner.
- 2008 The Benton County Surveyor's Office searched and found a Sherburne County cast iron monument, as set by the Sherburne County Surveyor in 2000. The Surveyor accepts the history of the position and updated ties from the Sherburne County Surveyor's certificate of location.

Benton County Coordinates obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 100267.414
 E-566509.815