

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST  $\frac{1}{4}$  Corner of Section 1, Township 38N, Range 30W, 4th P.M.

STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 8-11-88 placed a CAST IRON MONUMENT 6" BELOW THE GRAVEL  
DATE ROADWAY SURFACE

### SKETCH OF REFERENCE TIES

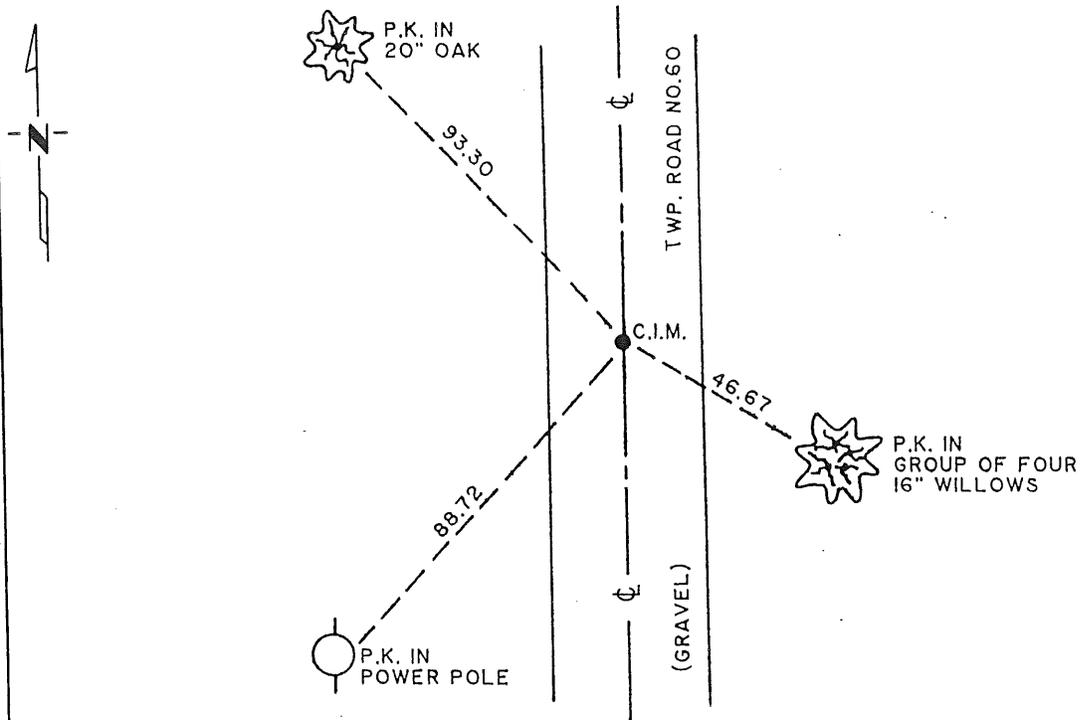

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Shapton SIGNATURE      12-14-88 DATE

Registration No. 17768

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

EAST QUARTER, SECTION 1, T38N, R30W, 4TH P.M.

1. The original survey was accomplished in August 1849 by Theodore Conkey, a U.S. Deputy Surveyor.
2. The old County surveyor's book provided no information for re-location of said corner.
3. On July 8, 1988, Paul E. Wellen and Associates Inc., dug with a backhoe and found nothing. I set said corner by the lost method of on line and perportional distance with the original survey between the northeast and southeast corners to said section.

191232

OFFICE OF  
BENTON COUNTY RECORDER  
BENTON COUNTY, MN  
CERTIFIED TO BE FILED  
AND/OR RECORDED ON

JAN 12 11 52 AM '89

ALICE G. BRIDGES  
COUNTY RECORDER

BY *[Signature]* DEPUTY