

Certified, Filed and or Recorded on
Dec. 24, 2008 AT 08:54AM

Signed: BW
MARILYN J NOVAK B V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 5, Township 38, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-13-08 found a CAST IRON MONUMENT BROKEN

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

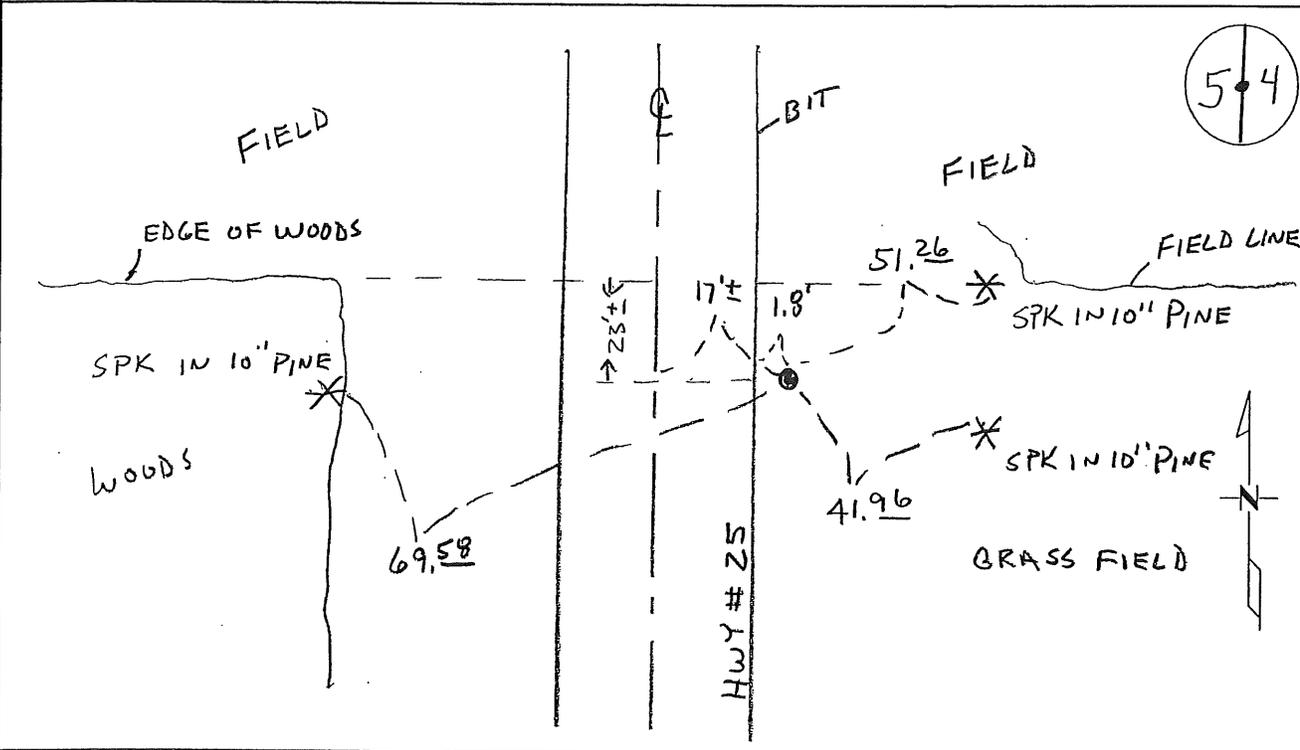

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 12/17/08

Statement of Evidence:

C053

East Quarter Corner of Section 5, Township 38 North, Range 30 West, Graham Township, 4th Principal Meridian, Benton County, Minnesota.

1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded:

8" Blk Oak	N 49 E	135 links
6" Blk Oak	S 58 1/2 W	163 links

1923 County Engineer's Notebook No. 40 contains a survey for CAR No. 1 running south to north. Notes do not show this corner with a distance of 5229.3 feet for the east line of Section 5.

1925 County Engineer's Notebook 44, page 10, notes line run north from the SE corner with a distance of 5228.6 feet to the NE corner Section 5.

1925 County Surveyor's Record Book 2, page 168, and Record Book A, Map No. 47, contains a survey of Sections 5 and 8 by Paul Zeese. Corner is shown marked by an iron and a stake. The following distances are shown 2645.6 feet to the SE corner and 2583 feet to the NE corner.

Undated County Surveyor's Record Book 2, page 166, notes the following reference ties to an iron:

TP	E	30.0
10" Poplar	SW	34.4

1952 MN/DOT alignment map for TH 25 shows assumed corner at center of north-south road and fence line west, which is 15.9 feet east of the new centerline. Stationing gives approximate distances of 2667.8 feet to the SE corner and 2563.1 feet to the NE corner.

1984 Paul Wellen, LS 10461, set a cast iron monument by proportionate measurement using the 1925 survey. Corner is 17 feet east of centerline of TH 25. He filed a Certificate of Location (#173409).

2008 Westwood Professional Services, Inc. found a CIM that fit 1984 Wellen. Measured 2645.98 feet to the SE corner and 2583.11 to the NE corner of Section 5 which is in substantial conformance with 1925 survey. CIM is accepted as marking the obliterated corner position.

Coordinates Obtained by GPS
NAD 83 (1996 Adjustment)
N-193841.549
E-488756.813

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 5, Township 38, Range 30, 4th P.M.

STATE OF MINNESOTA, County of BENTON


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 8-17-84 placed a CAST IRON MONUMENT
DATE

SKETCH OF REFERENCE TIES

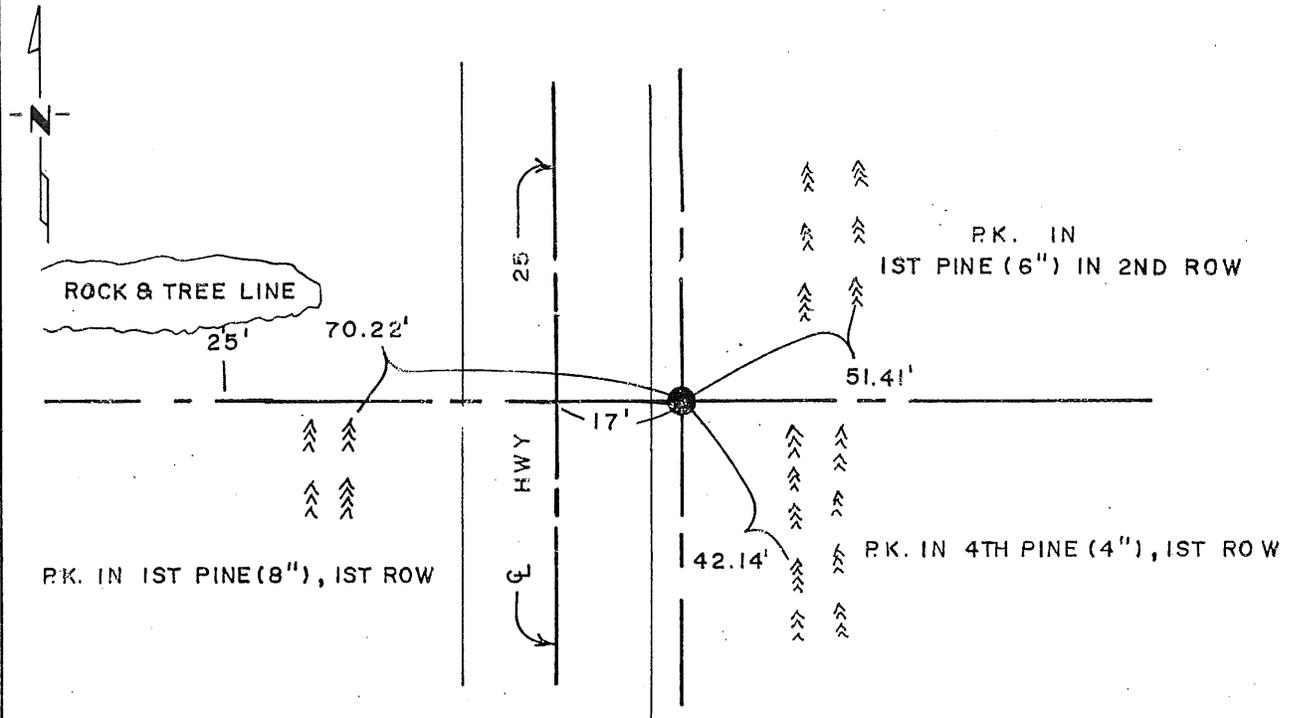

173409

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature]
SIGNATURE
1/7/35
DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Benton

I hereby certify that this document was filed in the Co. Recorders office at 11:00 A .M. on the 16 day of May A.D., 19

County Recorder Alice C. Engelmeier
By [Signature], Deputy

DOCUMENT NO. _____

Statement of Evidence:

East Quarter corner, Section 5, T38N, R30W, 4th P.M.

During th G.L.O. Survey of 1852, a wooden post was set to mark this corner.

In 1925, Paul Zeese, Benton County Surveyor, set an iron at this corner during his resurvey of Section 5, T38N, R30W

The Minnesota Highway Department, located this corner during its alignment survey of Minnesota Trunk Highway 25.

In 1984, Paul E. Wellen, L.L.S., St. Cloud, Minnesota, set a Cast Iron Monument at proportional measure of Paul Zeese's measurement between the northeast corner and the southeast corner of said Section 5.