


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 12, Township 38, Range 30
4TH Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found lowered monument removed monument (explain)
- On 8/26/03 placed a 1/2" iron pipe with cap No. 12684
DATE

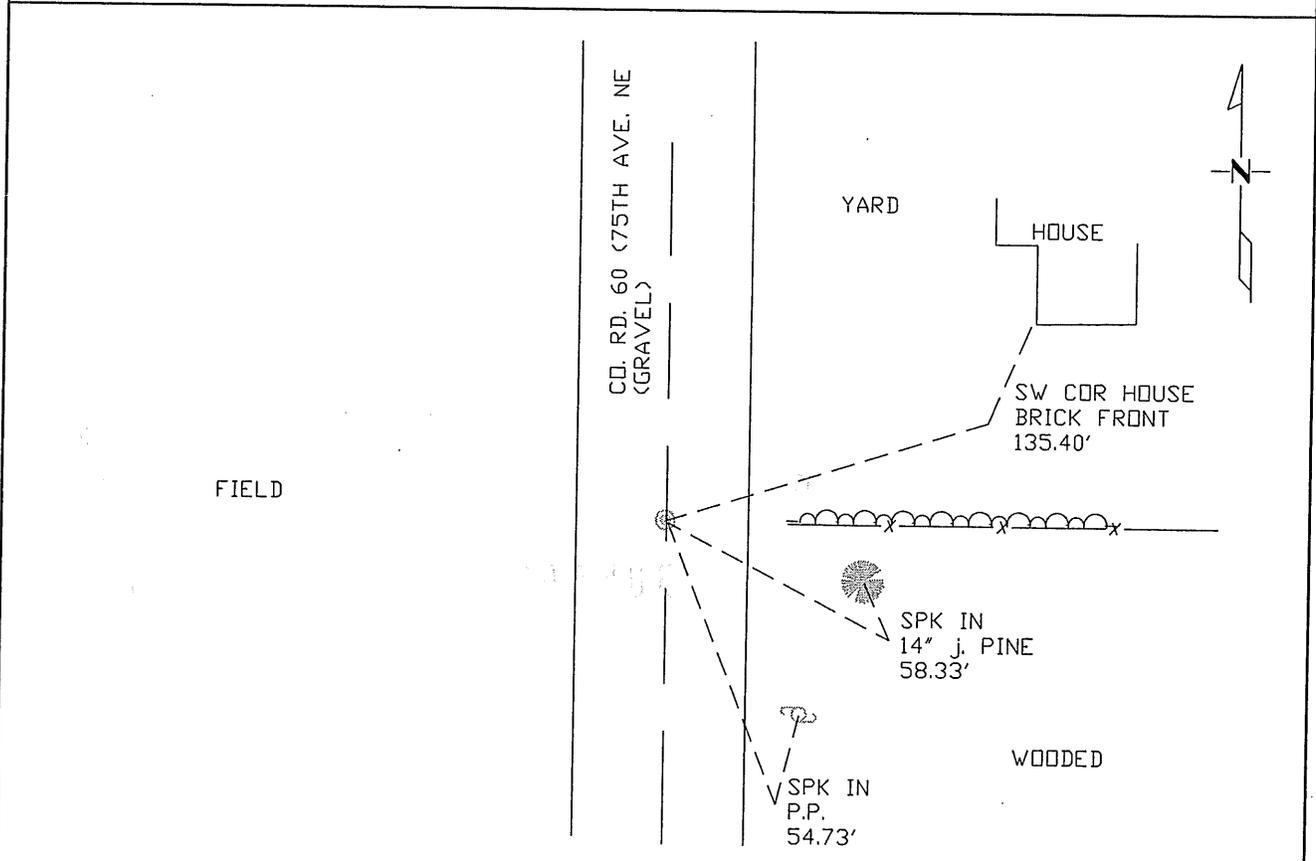

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature: *Gay A. Stern* Date: 9/9/03 License No. 12684
 Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence:

C123

The East Quarter Corner of Section 12, Township 38 North, Range 30 West, Graham Township, 4th Principal Meridian, Benton County, Minnesota.

1849 Original US General Land Office set a wood post at this location and bearing trees were recorded

6" Poplar	N 62 E	7 links
6" Blk Oak	N 45 W	18 links

2002 No resurvey information was found on this corner in the Benton County records.

2003 Westwood Professional Services, Inc. searched for corner marker in center of north-south road and in line with old fence line east. No monument was found. Measured 5415.98 feet between Northeast and Southeast corners of Section 12. Determined fence line and center of road was the best evidence of the obliterated corner position and set a ½ " iron pipe for the corner. Lost position of corner, midway and on line between section corners, fell 25.55 feet north and 0.18 feet east of the set pipe.

Coordinates Obtained by GPS to ½ " set iron pipe
NAD 83 (1996 Adjustment)
N- 188519.208
E- 510422.152

MARILYN J. NOVAK
COUNTY RECORDER
BY CK DEPUTY

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

305096

2003 SEP -9 A 11: 09