

Certified, Filed and or Recorded on
Nov. 04, 2008 AT 01:17PM

Signed: BW
MARILYN J NOVAK G V T
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 14, Township 38, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-21-08 found a CAST IRON MONUMENT

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

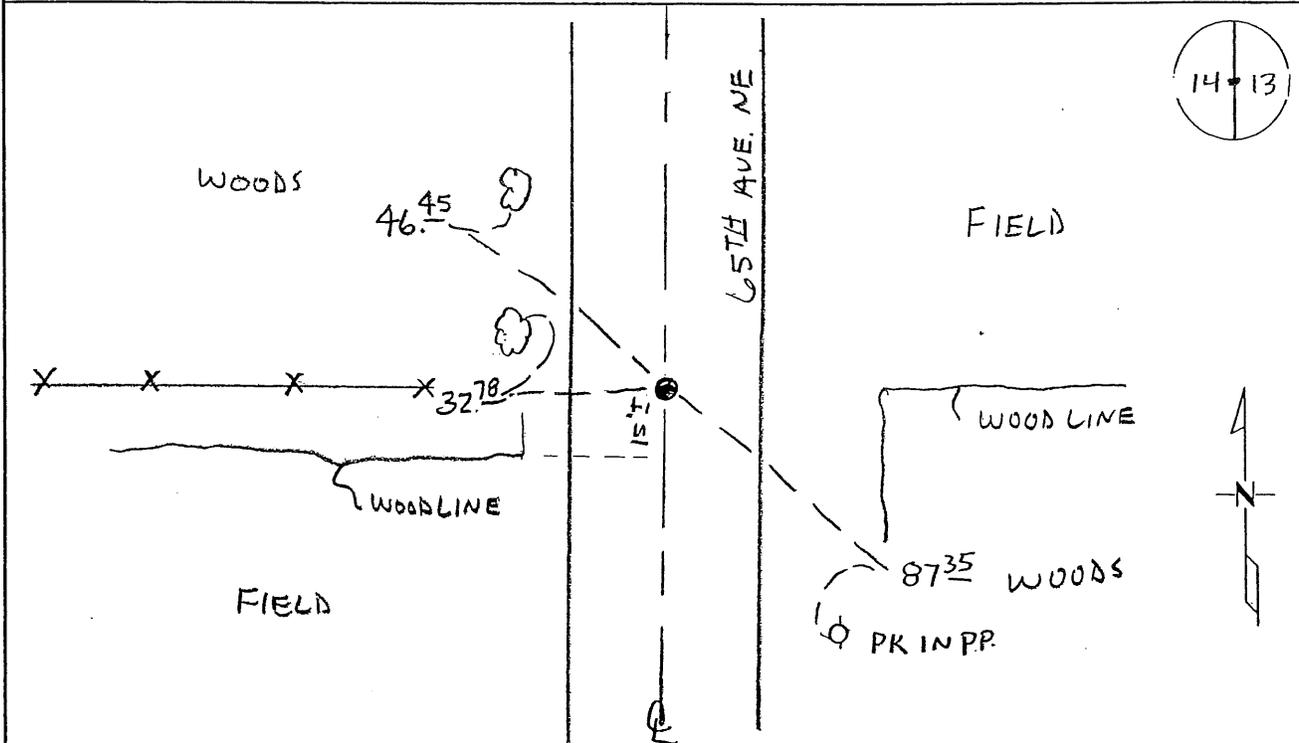

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:

C143

East Quarter Corner of Section 14, Township 38 North, Range 30 West, Graham Township, 4th Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|----------|--------|----------|
| 8" Aspen | N 25 E | 12 links |
| 8" Ash | N 64 W | 9 links |
- 1944 County Engineer's Notebook No. 164 contains a road survey for CAR 25 running south to north on section line. Corner is shown marked by a hub set in center of road with fence lines east and west. Ties:
- | | | |
|-------------|---|-------|
| Twin cherry | W | 47.0' |
| Burned FP | E | 52.5' |
- Stationing gives distances of 2657.8 feet to the SE corner and 2658.5 feet to the NE corner with a delta angle of 0-30' right.
- 1985 Ronald Engelmeyer, LS 13334, found no monument at this corner and set a cast iron monument at a fence line west, occupation line east, and the centerline of roads north/south. Verified location with measurements to the occupied center of section and sixteenth occupation line north. He filed a Certificate of Location (#173453).
- 2003 Found CIM and measured 2658.29 feet to the NE corner and 2659.52 feet to the SE corner with a deflection angle of 0-28'-23" right. Position agrees with 1944 assumed position and is accepted as marking the obliterated corner position. County Coordinates Obtained by GPS:
 NAD 83 (1996 Adjustment)
 N- 183081.800
 E- 505225.212
- 2008 Found CIM and measured 2658.29 feet to the NE corner and 2659.52 feet to the SE corner. CIM fits 1985 Engelmeyer ties. Position agrees with 1944 assumed position and is accepted as marking the obliterated corner position. Coordinates obtained by GPS coincide with 2003 position.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 14, Township 38, Range 30, 4 P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

On Nov. 11, 1984 found a fence line to the west, occupation line to the east
DATE and centerline of road to the north and south.


left monument as found, lowered monument, removed monument (explain)

On April 22, 1985 placed a Benton County Cast Iron Monument.
DATE

Located
 marked
 13
 24 NE
 13 NE
 14
 38 30

SKETCH OF REFERENCE TIES

RH: Redhead Spike

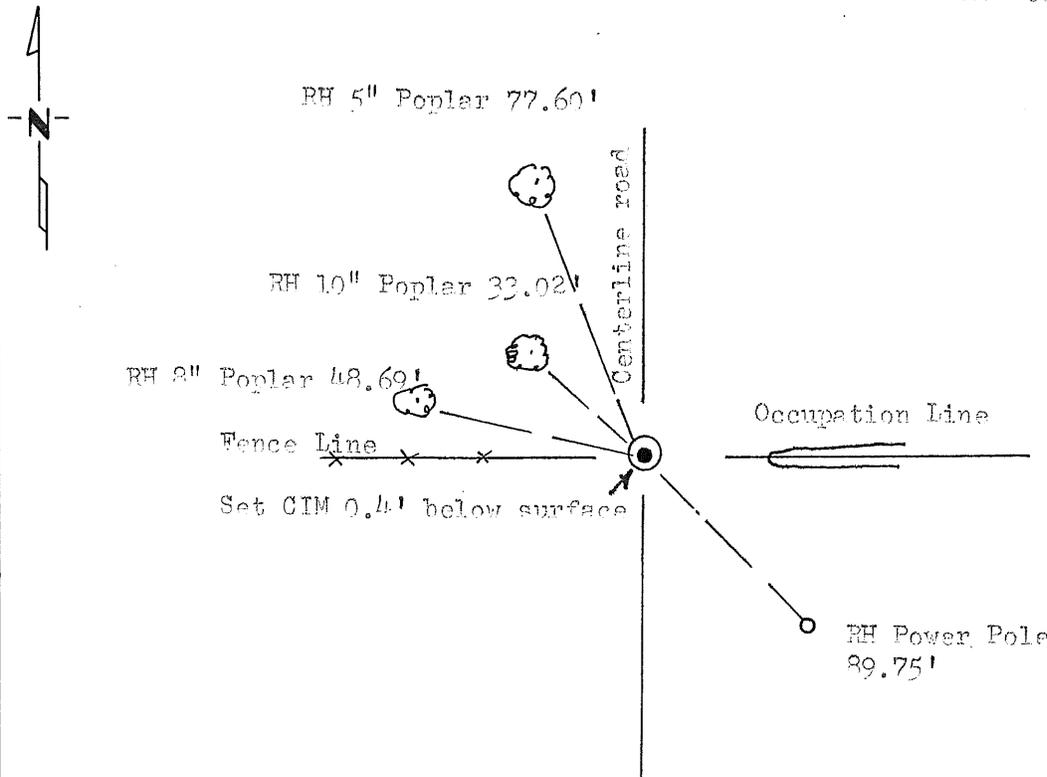

173453

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald Engelmeier 4-23-85
SIGNATURE DATE

Registration No. 13334

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
 County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 3 P. .M. on the 16th day of May A.D., 19 85

Register of Deeds Alice C. Engelmeier
 By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

East Quarter Corner Section 14-38-30.

The GLO survey shows a post set at this corner.

Benton County Highway Dept. shows no resurveys in this section.

Nov. 11, 1984 I found nothing at this corner. Accepted a fence line to the west, occupation line to the east and centerline of road to the north and south at this location and verified its location with measurements to the center of section and a 1/16 line to the north.

April 22, 1985 Set Benton County Cast Iron Monument.