

Certified, Filed and or Recorded on
Nov. 04, 2008 AT 01:15PM

Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 15, Township 38, Range 30


4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 10-14-08 found a CAST IRON MONUMENT

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

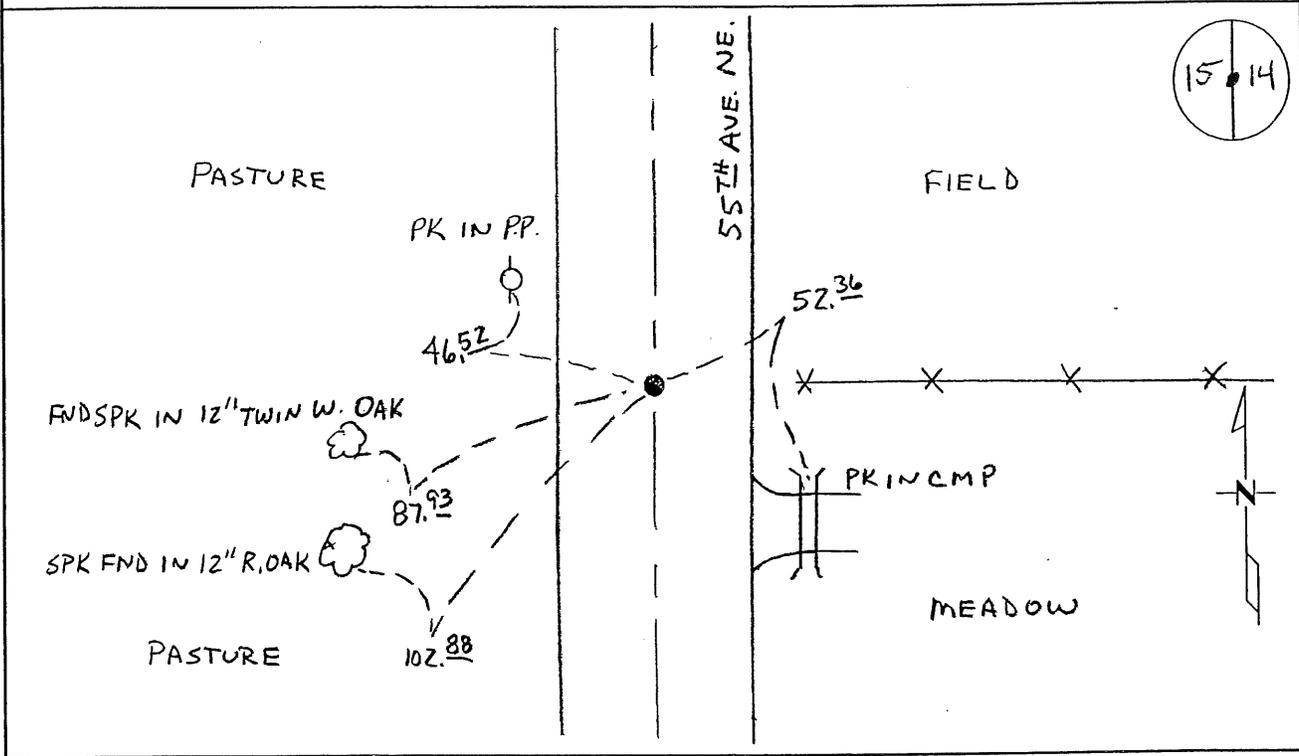

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 11/3/08

Statement of Evidence:

C153

East Quarter Corner of Section 15, Township 38 North, Range 30 West, Graham Township, 4th Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|-----------|------------|----------|
| 10" Aspen | S 74 1/2 E | 18 links |
| 10" Aspen | S 28 W | 21 links |
- 1931 County Engineer's Notebook No. 81 for survey of Graham aid road running south to north. Corner is not shown, but a 1/4 line fence is noted at 2615 feet north of the SE corner with the east line of the section being 5214.0 feet.
- 1963 County Engineer's Notebook No. 285 contains a road survey for CR 22 running south to north on section line. No corner is shown, but stationing notes a 1/4 line fence east with distances of 2618.5 feet to the SE corner and 2599.4 feet to the NE corner.
- 1985 Ronald Engelmeyer, LS 13334, found no monument at this corner and set a cast iron monument at the centerline of a road north/south and a fence line east. Verified position by measurements to occupied sixteenth line and center of section. He filed a Certificate of Location (#173451).
- 2002 No old resurvey information was found on this corner in the Benton County Surveyor's records.
- 2003 Found CIM and measured 2617.83 feet to the SE corner and 2598.94 feet to the NE corner. Position agrees with previously assumed positions and is accepted as marking the obliterated corner position.
 County Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N- 183070.705
 E- 499887.151
- 2008 Westwood Professional Services, Inc. found a CIM fitting 1985 Engelmeyer ties. CIM is accepted as marking the obliterated position for this corner. Coordinates obtained by GPS coincide with 2003 position

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 15, Township 38, Range 30, _____ P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:


On Nov. 11, 1984 found a fence line to the east and centerline of road
DATE to the north and south.

left monument as found, lowered monument, removed monument (explain)

On April 22, 1985 placed a Benton County Cast Iron Monument.
DATE

SKETCH OF REFERENCE TIES

RH: Redhead Spike

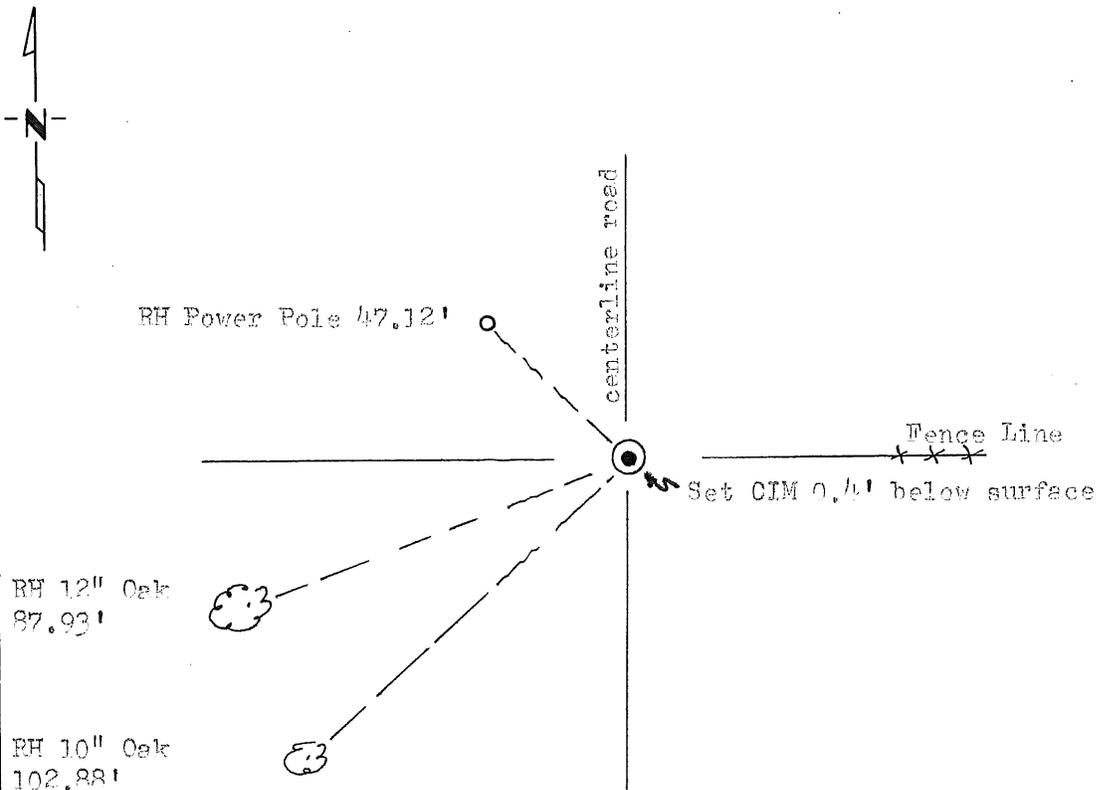

Handwritten notes:
NW 1/4
NW 1/4
SE 1/4
NE 1/4
15
38 30

173451

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald Engelmeier 4-23-85
SIGNATURE DATE

Registration No. 13334

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 3 P. .M. on the 16th day of May A.D., 19 85

Register of Deeds Alice C. Engelmeier

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

East Quarter Corner Section 15-28-20.

The GLO survey shows a post set at this corner.

Benton County Highway Dept. shows no resurveys in this section.

Nov. 11, 1984 I found nothing at this corner. Accepted a fence line to the east and centerline of road at this location and verified its location with measurements to occupation lines to 1/16 line and center of the section.

April 22, 1985 Set Benton County Cast Iron Monument.