

270205

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

Nov 17 10 47 AM '00

ALICE C. ENGELBERG
COUNTY RECORDER

BY CHC DEPUTY xm

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 16, Township 38 N, Range 30 W


4th Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

On 10/19/2000 found a Piece of charred wood (12" x 6" x 1.5') at the lost location.
DATE The lost location also fits occupation.

left monument as found lowered monument removed monument (explain)

On 10/27/2000 placed a Benton County Cast Iron Monument down 0.7'
DATE The charred wood was buried next to the CIM.

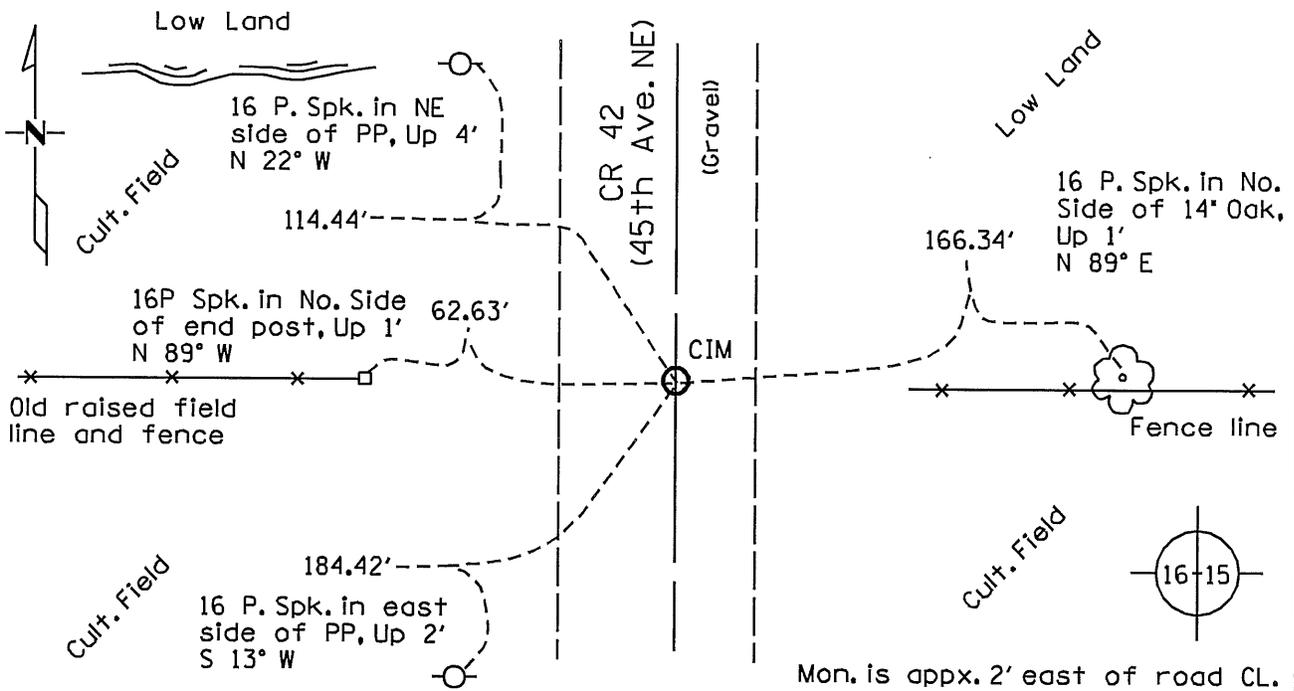

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature Samuel J. Daleo Date 11-2-00 License No. 40341

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence

East Quarter Corner of Section 16, Twp. 38 N, Rng. 30 W
4th P.M., Benton County, Minnesota

In 1852 the U.S GLO performed the original government land survey and marked the corner with a post. The post was witnessed by a 10" burr oak, S 48 degrees W, 790 links away.

No other information about this corner could be located at the time of this history search.

On October 19, 2000 Sam DeLeo, RLS #40341, supervised the excavation in search of a monument ar accessories used to mark the corner. The excavation was performed midway between found corners to the north and south, at the existing east-west fence line. A rectangular hole, approximately 12'x 16' was excavated to a depth of 2.5'. No remnants of the corner were found during the excavation.

The location for the corner was computed at its lost location, on line and midway between the found NE and SE corners of the section. This location fell within 1 foot of the east-west fence line and on the edge of the hole that was excavated. When setting the monument for the corner a 12" x 6" x 1.5" piece of charred wood was found lying on its side in the hole dug to set the monument. A Benton County Cast Iron Monument was set at the lost location and the charred wood buried next to it. Reference ties were recorded and a Certificate of Location of Government Corner was made.