

270207

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND RECORDED ON

Nov 17 10 47 AM '00

ALICE O. ENHART
COUNTY RECORDER


BY VAC DEPUTY

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 17, Township 38 N, Range 30 W
4th Principal Meridian, State of Minnesota, County of BENTON

At the corner location shown on the sketch:

- On 10/19/2000 found a Standard cast Iron monument, tipped and broken
DATE
- left monument as found lowered monument removed monument (explain)
- On 10/27/2000 placed a New Cast Iron Monument
DATE

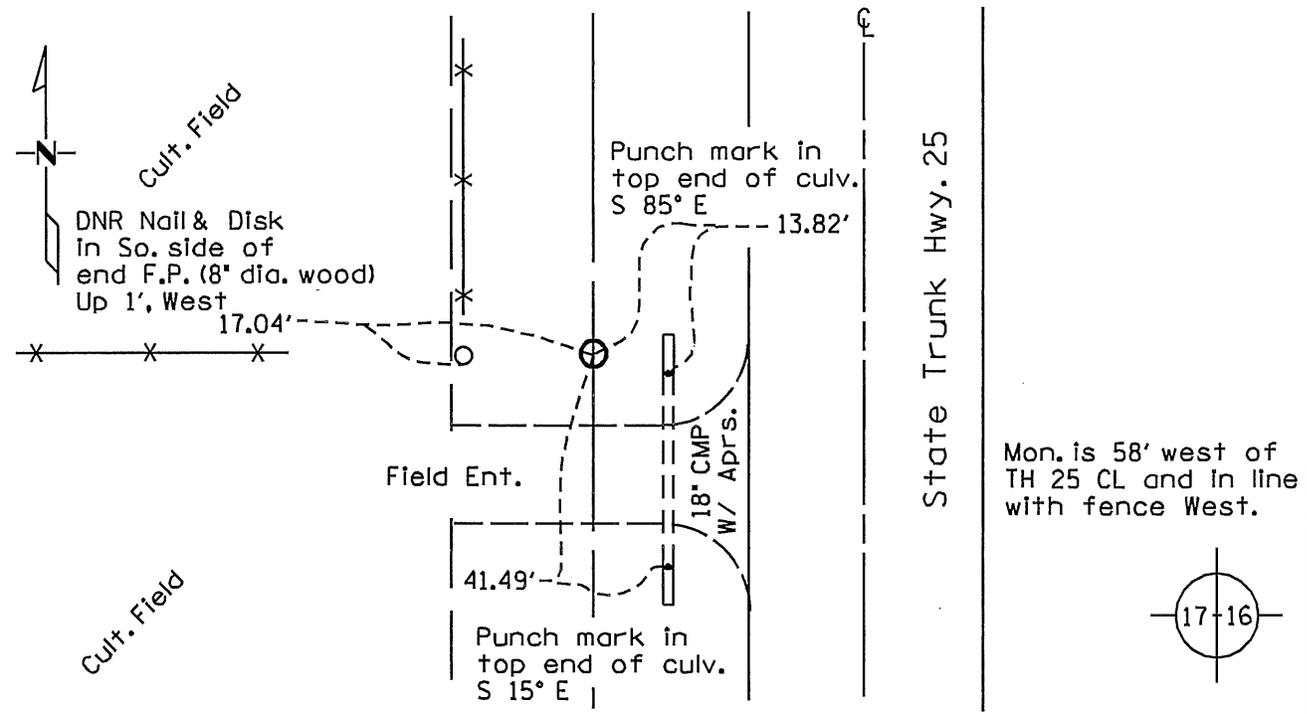

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature Sam J. Delec Date 11-02-00 License No. 40341
 Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Statement of Evidence

East Quarter Corner of Section 17, Twp. 38 N, Rng. 30 W
4th P.M., Benton County, Minnesota

Refer to the Certificate of Location of Government Corner; Index No. L-9, by Bruce W. Shepperd, RLS #17003, dtd. 2/3/93, Dept. of Natural Resources, on file at the Benton County Highway Department, for information on the history for this corner.

On October 19, 2000 Sam DeLeo RLS #40341 found a cast iron monument broken and tipped at the approximate location shown on Bruce Shepperd's 1993 Certificate. On October 27, 2000 the location for the corner was perpetuated using the coordinate values listed on Bruce Shepperd's 1993 Certificate and Mn/DOT's third order horizontal control stations "Norway" and "Leaner". The broken monument was removed and a new cast iron monument was set to replace it. Reference ties were updated and a new Certificate of Location of Government Corner was made.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 17, Township 38 N, Range 30 W, 4th P.M.


STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On 11-10-92 found a CAST IRON MONUMENT, UP 0.2'
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ Placed a _____
DATE

SKETCH OF REFERENCE TIES

NOTE:
 MONUMENT IS
 58.0' WEST OF CL N-S ROAD
 IN LINE WITH FENCE WEST
 SET STEEL WITNESS POST 1'
 NORTH OF MONUMENT

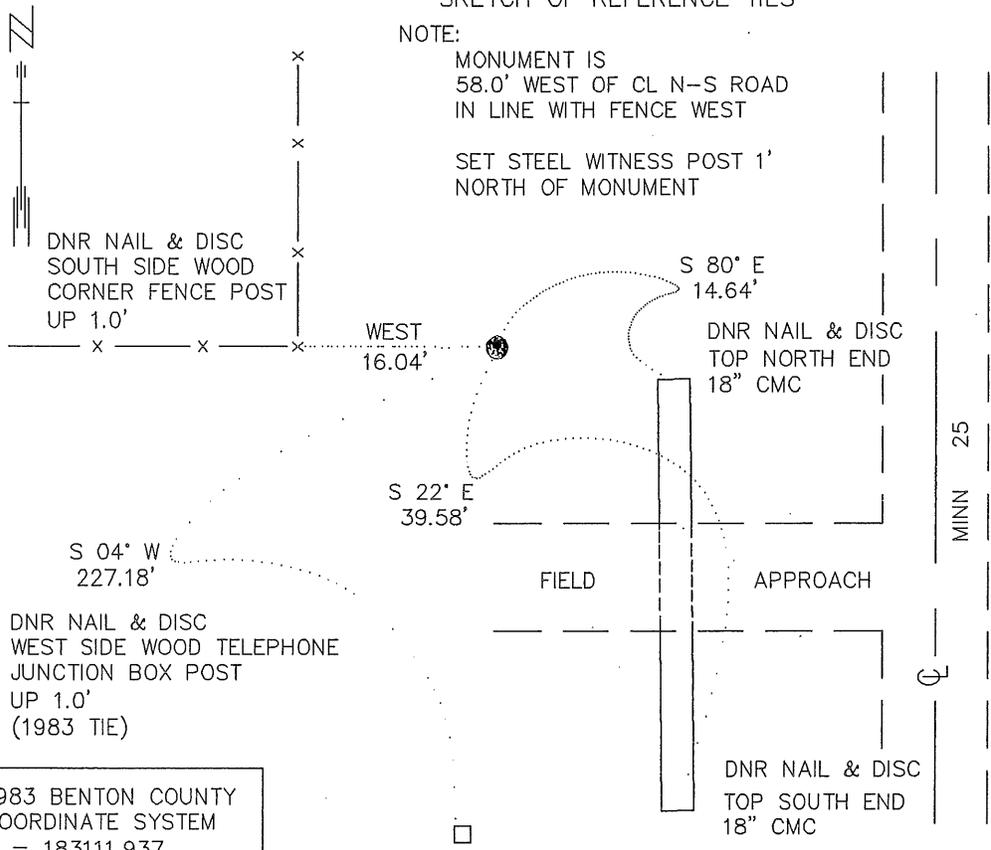

1983 BENTON COUNTY
 COORDINATE SYSTEM
 N = 183111.937
 E = 489130.495

BEARINGS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

J.B.M. JAN. 1993
WMA01555.00.00.01

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Sheppard 2-3-93
 SIGNATURE DATE

- Registration No. 17003
- Land Surveyor, Professional Engineer
 - County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER **212979**
 County of Benton

I hereby certify that this document was filed in the Co. recorders office at 8:15 A.M. on the 8 day of February A.D., 1993
 County Recorder Alice C. Longelmejer
 By Jw, Deputy
 DOCUMENT NO. 212979

East Quarter Corner Section 17, Township 38 North, Range 30 West

The DNR Bureau of Engineering contacted the following for survey information:
Minnesota Secretary of State's Office
MN/DOT Office in St. Paul
MN/DOT Office in Brainerd
Benton County Recorder's Office
Benton County Highway Engineer's Office
Paul E. Wellen and Associates of St. Cloud
David Regan, RLS #12236, of St. Cloud
Rieke Carroll Muller and Associates of St. Cloud
William F. Lunser, RLS #9394, of St. Cloud
Comstock and Davis Inc., of Little Falls

1852 U. S. General Land Office notes obtained from the Secretary of State's Office show the corner marked with a wood post with the following bearing tree marked:

10" Burr Oak, North 54 1/2° West, 245 links (161.70 feet)
no other near

1951 A page in a field notebook obtained from the MN/DOT Office in Brainerd shows that the location of the corner was assumed at the intersection of a north-south road and the westerly projection of an east-west fence. A description of what was set to mark corner is not given. The corner is shown:

2730.2 feet from the northeast corner of Section 17
2713.4 feet from the northeast corner of Section 20
58.3 feet west of center line Station 143+34.9

No Date A right-of-way map for State Highway 25 obtained from the MN/DOT Office in St. Paul shows that the location of the corner was assumed at the intersection of a north-south road and the westerly projection of an east-west fence. A description of what was set to mark corner is not given. The corner is shown:

2730.2 feet from the northeast corner of Section 17
2713.4 feet from the northeast corner of Section 20
58.3 feet west of new center line Station 143+34.9

1983 June, a Certificate of Location of Government Corner signed by Paul E. Wellen and obtained from Paul E. Wellen and Associates states that a Benton County Cast Iron Monument was set at corner using MN/DOT ties. The following ties are shown to corner:

58.3 feet west of center line State Highway 25
10" Oak, northeast, 157.07 feet
24" Elm, southeast, 163.67 feet
post next to pedestal, southwest, 227.35 feet

1992 November 10, DNR Bureau of Engineering found a cast iron monument at corner. Searched for and found one record tie as shown on the sketch of reference ties. The cast iron monument was found to be:

2730.70 feet from the northeast corner of Section 17
2713.43 feet from the northeast corner of Section 20
58.0 feet of the center line of State Highway 25
9.92 feet south and 29.19 feet west of the computed lost position for corner


Analysis of the above information led the DNR Bureau of Engineering to conclude that the found cast iron monument marks the obliterated location of the corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that on the 6th day of June, 1983
 I did locate the EAST QUARTER corner of Section 17,
 Twp. 38, Rg. 30, BENTON County, Minnesota, which
 was evidenced by State Highway records

I further certify that in order to perpetuate said corner I did
 at the exact location thereof place a permanent marker consisting
 of a BENTON COUNTY CAST IRON MONUMENT and that
 I did establish witness or reference monuments as shown below:

1811E
 1711E
 17
 16
 15
 14
 13
 12
 11
 10
 9
 8
 7
 6
 5
 4
 3
 2
 1

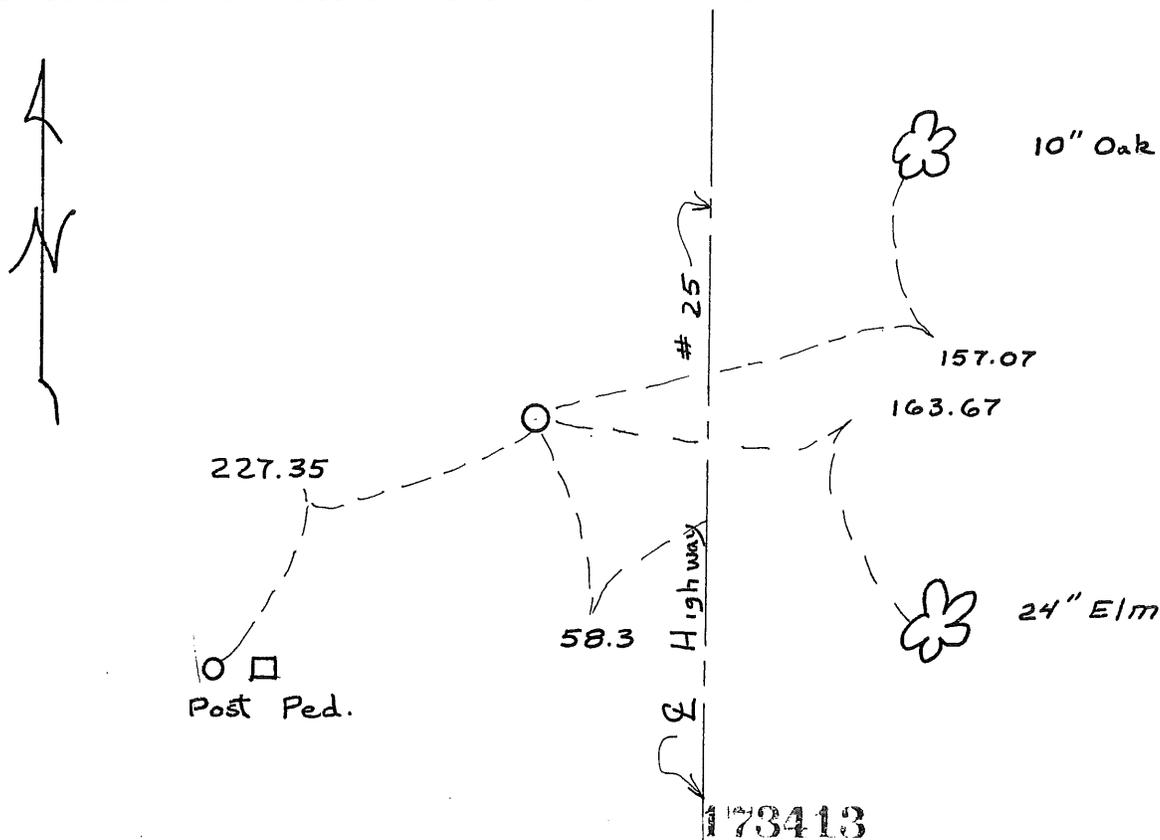

I hereby certify that the above
 is true and correct and that I am
 a registered Land Surveyor under
 the laws of the State of Minnesota.

Gary J. Miller

Minn. Registration No. 10461

Office of the County Recorder,
Benton County, Minn.

I hereby certify that the within instrument
 was filed for record in this office on the
16 day of May, 1985.
 At 11:00 A.M.

Alice C. Engelmeier
 County Recorder

By *RL* Deputy.