


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 18, Township 38 N, Range 30 W, 4th P.M.

STATE OF MINNESOTA, County of BENTON

At the corner location shown on the sketch:

- On 11-10-92 found a CAST IRON MONUMENT, DOWN 0.5'
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ Placed a _____
DATE

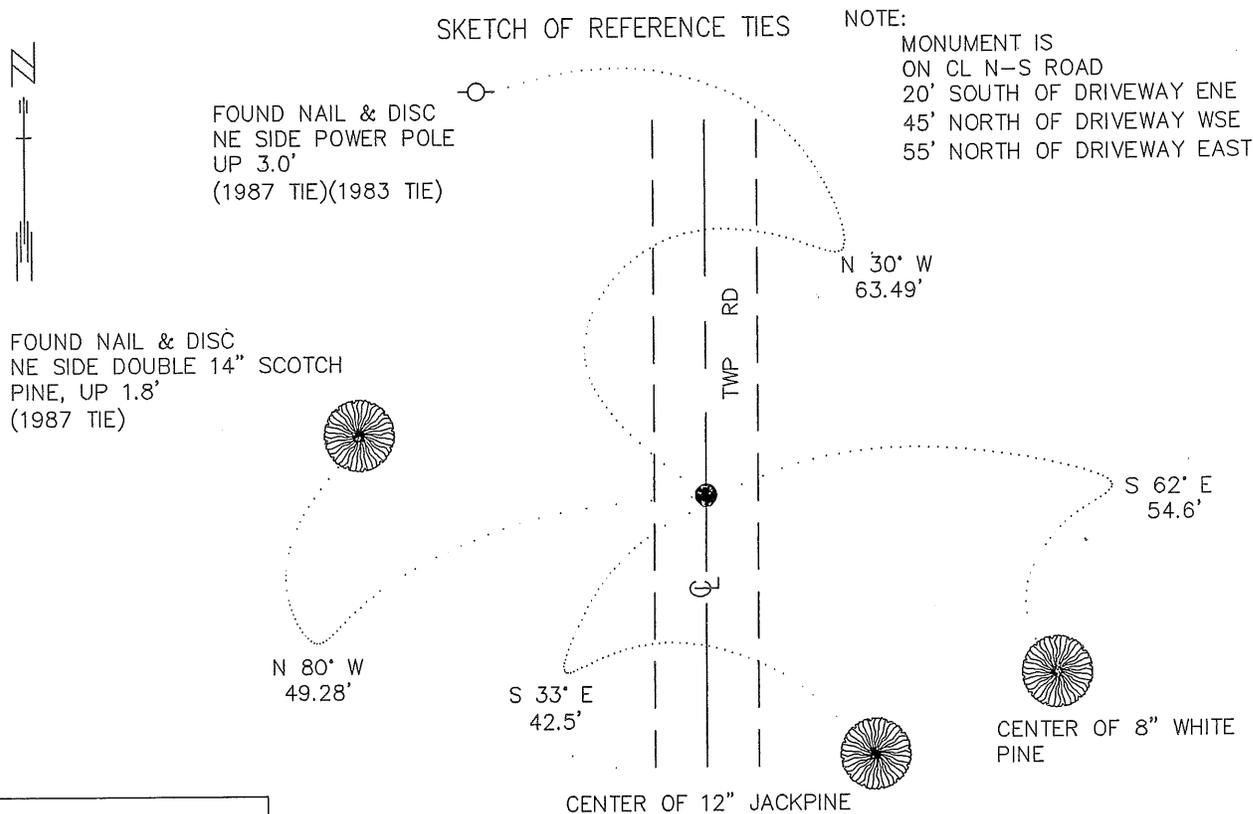

1983 BENTON COUNTY
 COORDINATE SYSTEM
 N = 183177.769
 E = 483824.647

BEARINGS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

J.B.M. JAN. 1993
 WMA01555.00.00.01

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce W. Sheppard 2-3-93
SIGNATURE DATE

Registration No. 17003
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER **212980**
 County of Benton

I hereby certify that this document was filed in the Co. recorders office at 8:15 A.M. on the 8 day of February A.D., 1993

County Recorder Alice C. Engelmeier
 By JW, Deputy
 DOCUMENT NO. 212980

East Quarter Corner Section 18, Township 38 North, Range 30 West

The DNR Bureau of Engineering contacted the following for survey information:

Minnesota Secretary of State's Office
MN/DOT Office in St. Paul
MN/DOT Office in Brainerd
Benton County Recorder's Office
Benton County Highway Engineer's Office
Paul E. Wellen and Associates of St. Cloud
David Regan, RLS #12236, of St. Cloud
Rieke Carroll Muller and Associates of St. Cloud
William F. Lunser, RLS #9394, of St. Cloud
Comstock and Davis Inc., of Little Falls

1852 U. S. General Land Office notes obtained from the Secretary of State's Office show the corner marked with a wood post with the following bearing trees marked:

3" Black Oak, South 68° East, 55 links (36.30 feet)
4" Black Oak, South 15° West, 300 links (198.00 feet)

1983 Pages from a field notebook obtained from Paul E. Wellen and Associates show that a 1" solid iron pin was found at corner. The iron pin was replaced with a cast iron monument and was found to be:

2765.63 feet from the northeast corner of Section 19
2658.76 feet from the northeast corner of Section 18

The following ties are shown to corner:

in line with tree line west
on the center line of a north-south road
southwest corner of chicken barn, northeast, 152.71 feet
northeast corner of mobile home, southwest, 51.45 feet
power pole, northwest, 63.51 feet

1987 April, a Certificate of Location of Government Corner signed by Paul E. Wellen and obtained from Paul E. Wellen and Associates states that a cast iron monument was set at corner. The following ties are shown to corner:

on center line north-south gravel road
6" Norway Pine, northeast, 39.52 feet
8" Jack Pine, northeast, 42.13 feet
double 10" White Pine, northwest, 49.38 feet
nail and disk in power pole, northwest, 63.53 feet

1992 November 10, DNR Bureau of Engineering found a cast iron monument at corner. Searched for and found record ties as shown on the sketch of reference ties. The cast iron monument was found to be:

on the center line of a north-south road
2764.14 feet from the northeast corner of Section 19
2658.63 feet from the northeast corner of Section 18
52.71 feet north and 2.07 feet west of the computed lost
position for corner

Analysis of the above information led the DNR Bureau of Engineering to conclude that the found cast iron monument marks the obliterated location of the corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter _____ Corner of Section 18, Township 38, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 4/13/87 placed a Cast Iron Monument
DATE

SKETCH OF REFERENCE TIES

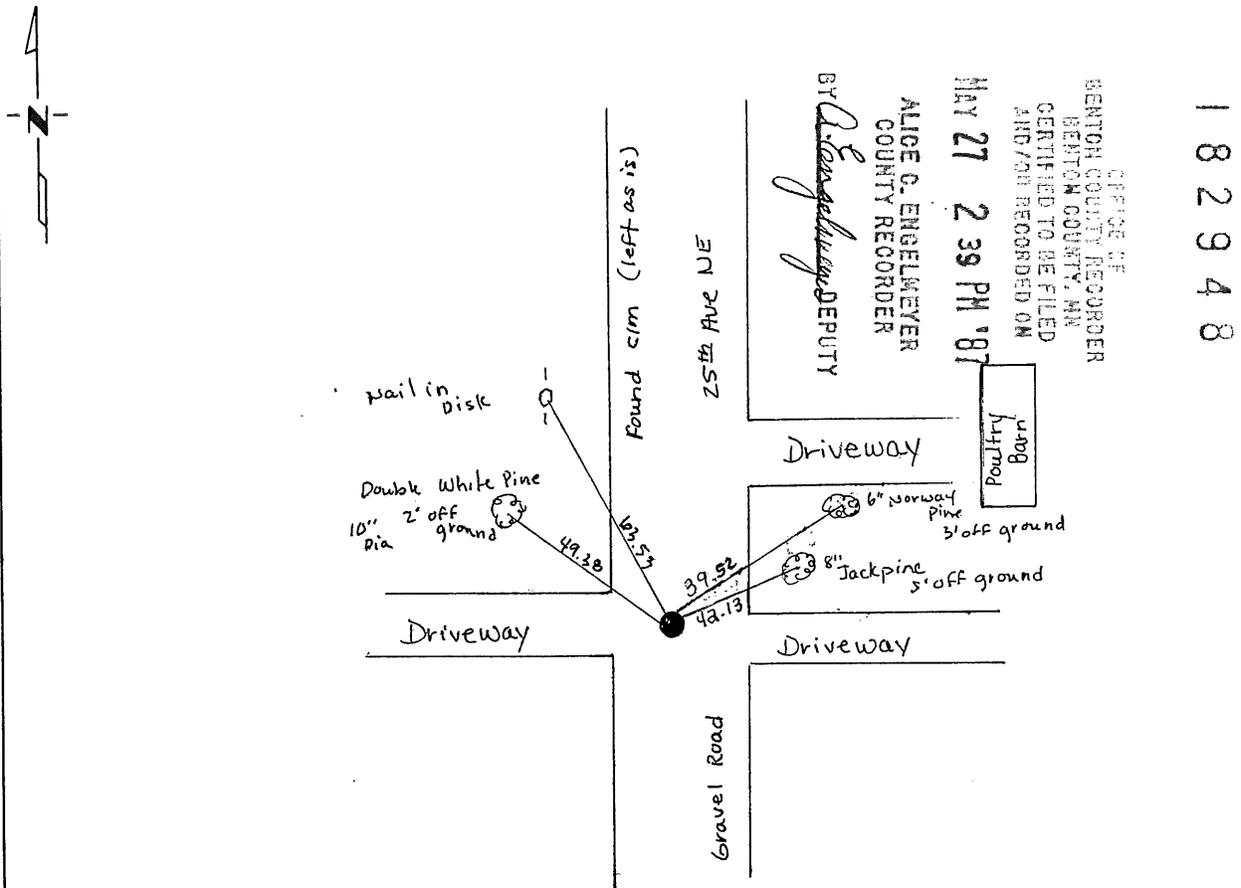

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
MAY 27 2 39 PM '87
CERTIFIED TO BE FILED
AND/OR RECORDED ON

BY Alice G. Engelmeier DEPUTY
ALICE G. ENGELMEIER
COUNTY RECORDER

182948

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 5/5/87
SIGNATURE DATE

Registration No. 10461
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____
 By _____, Deputy
 DOCUMENT NO. _____