

Certified, Filed and or Recorded on
July 06, 2010 AT 03:14PM


Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 22, Township 38 North, Range 30 West, Fourth Principal Meridian, Benton County, Minnesota.

At this corner location shown on the sketch:

- On 10/15/2008 found a Cast Iron Monument
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

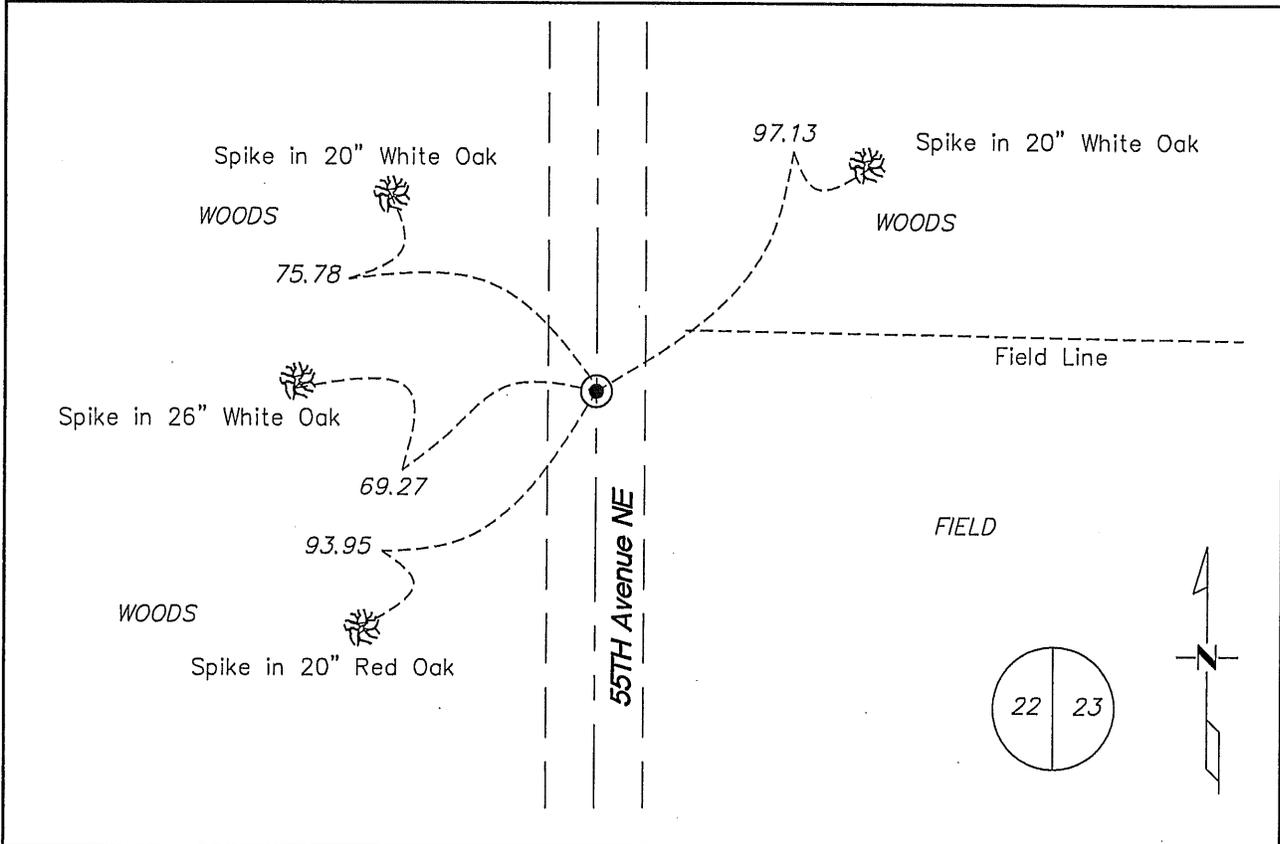

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a Licensed Land Surveyor under the laws of the State of Minnesota.

Signature: Jerome C. Wittstock
Benton County Surveyor
License No. 19552

Date: 7/2/2010

Benton County Surveyor's Office
 Jerome C. Wittstock, County Surveyor
 Minnesota License No. 19552

Statement of Evidence:

C223

East Quarter Corner of Section 22, Township 38 North, Range 30 West, Graham Township, 4th Principal Meridian, Benton County, Minnesota.

1852 Original US General Land Office survey established this corner and set a wood and bearing trees were recorded.

| | | |
|----------|------------|----------|
| 8" Aspen | N 29 1/2 E | 13 links |
| 8" Aspen | S 70 W | 12 links |

1931 County Engineer's Notebook No. 81 for survey of Graham aid road running north to south. Corner is not shown with a distance of 5374.3 feet for the east line of Section 22.

1983 David Regan, LS 12236, set a cast iron monument at the centerline of roads north/south. He filed a Certificate of Location (#166045).

2008 Westwood Professional Services found the CIM set by Regan in 1983. Position falls approximately 15 feet north of a midpoint between section corners with no defined occupation lines east or west. According to Regan ties page 104 from 4/29/1983, he set the CIM on occupation. The northeast corner measures 2672.20 feet from the CIM and the southeast corner measures 2702.63. The CIM is accepted as marking the obliterated corner position.

Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-177785.547
 E-500113.512

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter _____ Corner of Section 22, Township 38, Range 30, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 4/29/83 placed a Benton County cast iron monument in center
line of north-south road
DATE

SKETCH OF REFERENCE TIES

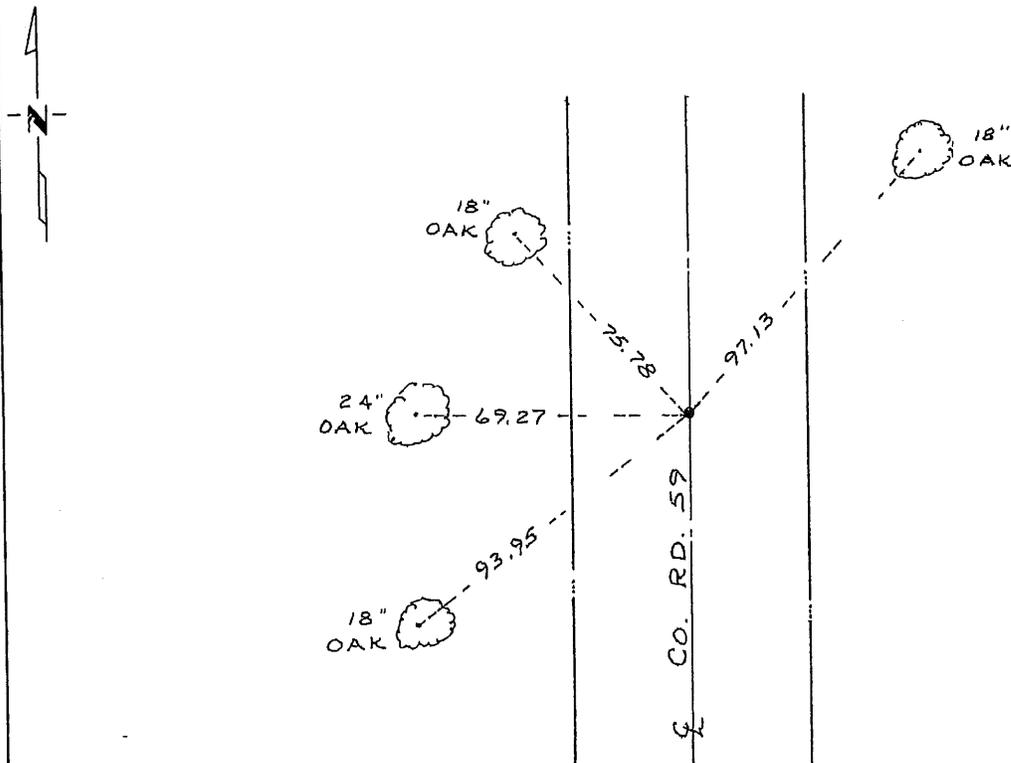

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David G. Ryan 7/14/83
SIGNATURE DATE

Registration No. 122766

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

County Recorder
OFFICE OF THE REGISTER OF DEEDS
County of Benton

I hereby certify that this document was filed in the Reg. of Deeds office at 11 A.M. on the 25 day of July A.D., 1983
Co. Recorder
Register of Deeds Ed. Johnson

By _____, Deputy
DOCUMENT NO. 166045