

A 372584

Certified, Filed and or Recorded on
Mar. 02, 2010 AT 03:33PM


Signed: BW
MARILYN J NOVAK G V I
BENTON COUNTY MINNESOTA
MARILYN J NOVAK
COUNTY RECORDER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 26, Township 38, Range 30
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 10-22-08 found a 3/8" OPEN IRON PIPE
- left monument as found lowered monument removed monument (explain)
- On _____ placed an _____

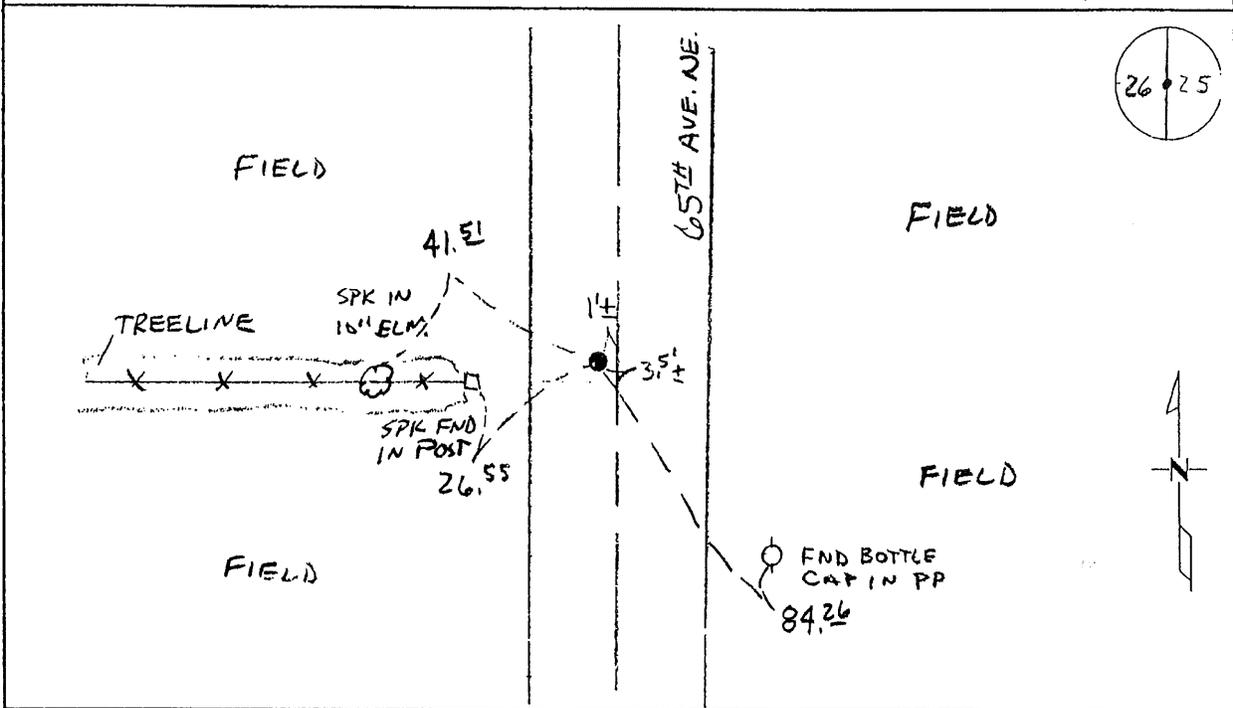

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature [Handwritten Signature]
Deputy County Surveyor
License No. 43932

Date: 11/20/09

Benton County Surveyor's Office
 Chris Hoglund, Deputy County Surveyor
 Minnesota License No. 43932

Statement of Evidence:

C263

East Quarter Corner of Section 26, Township 38 North, Range 30 West, Graham Township, 4th Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- | | | |
|-----------|-----------|----------|
| 14" Maple | N 6 1/2 E | 24 links |
| 6" Aspen | S 39 E | 12 links |
- 1944 County Engineer's Notebook No. 164 contains a road survey for CAR 25 running south to north on section line. Corner is shown marked by a hub set in center of road. Stationing gives distances of 2669.5 feet to the SE corner and 2658.0 feet to the NE corner with a delta angle of 0-44' left.
- Newer Tie: PP SE 81.3'
- 1952 MN/DOT alignment map for TH 25 shows corner assumed in center of north-south road in line with fences east-west. Distance of 2668.1 feet is given to the SE corner.
- 2009 Westwood Professional Services, Inc. found 3/8" iron pipe ~1' west of the centerline of 65th Ave. NE. We measured 2671.22 feet to the SE corner and 2656.34 feet to the NE corner which fits relatively well with 1944 County Engineer's distances. 3/8" iron pipe is accepted as marking the obliterated position for this corner.
- Coordinates Obtained by GPS
 NAD 83 (1996 Adjustment)
 N-172409.861
 E-505679.927