

A 362870

Certified, Filed and or Recorded on  
JAN. 06, 2009 AT 03:06PM


Signed: CK  
MARILYN J NOVAK ~~6 V 1~~  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 29, Township 38 N, Range 30 W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

- On 8-14-2008 found a 1/2" Iron Pipe flush, 10.4 feet west of TH25 C/L.  
DATE
- left monument as found     lowered monument     removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

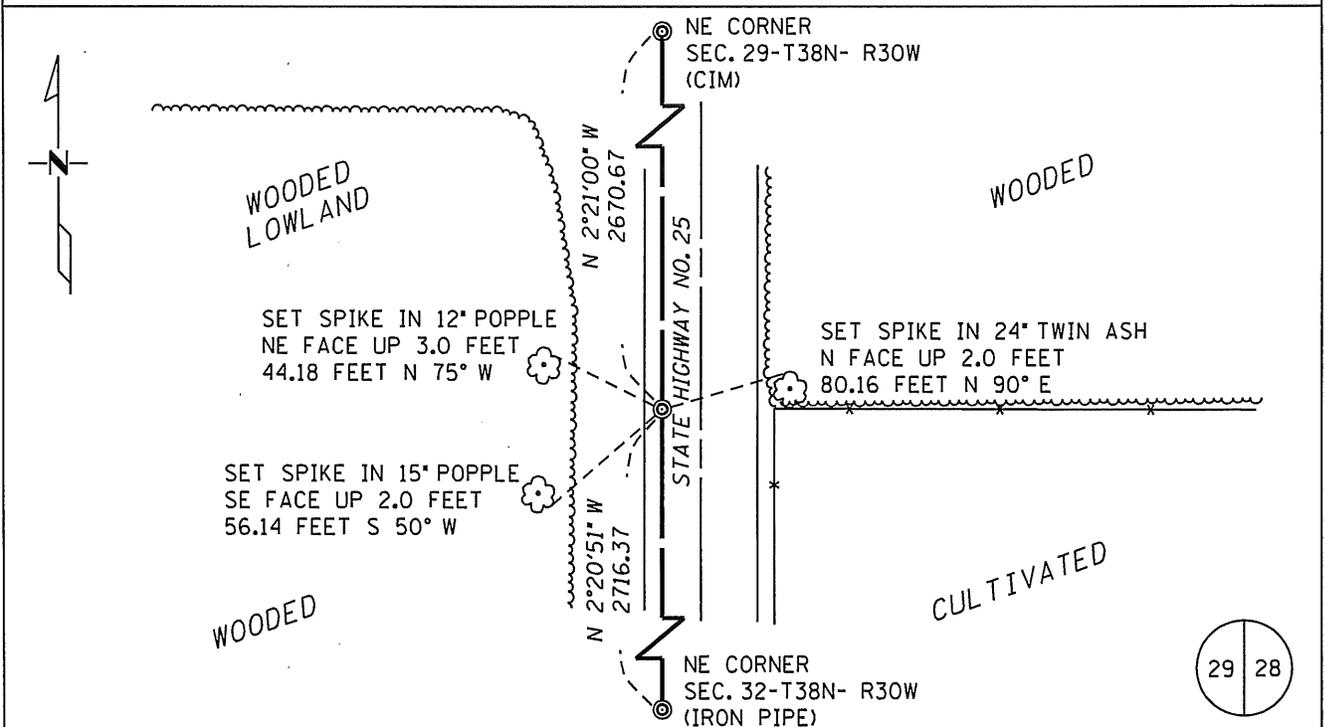

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature S. J. DeLo Date 10-3-2008 License No. 40341

Title:  Land Surveyor     Professional Engineer     County Surveyor     County Engineer

**Statement of Evidence:**

C293

East Quarter Corner of Section 29, Township 38 North, Range 30 West, Graham Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post at this location and bearing trees were recorded.
- |           |            |          |
|-----------|------------|----------|
| 8" Aspen  | S 55 W     | 17 links |
| 10" Aspen | S 62 3/4 E | 13 links |
- 1923 County Engineer's Notebook No. 40 contains a survey for CAR No. 1 running south to north. Notes do not show this corner with a distance of 5386.2 feet for the east line of Section 29.
- 1952 MN/DOT alignment map (File No. 12-79) for TH 218 (25) notes the assumed corner is at a fence line east and a road north/south. Corner is 10.4 feet west of new C/L of TH 25.
- 1963 The Minnesota Dept. of Natural Resources (fka MN Conservation Dept.) performed a survey in Sections 29 and 30 for the Wisneski WMA (File No. G892-X). They make no reference to a monument, or measurements to the E Qtr. Corner of Sec. 29.
- 2002 Sidney Williamson, LS 10918, (BWK) established this corner based on MN/DOT alignment map. Gives distances of 2716.37 feet to the SE corner and 2670.67 feet to the NE corner making the corner 22.85 feet north of the lost position.
- County Coordinates Obtained from BWK  
 NAD 83 (1996 Adjustment)  
 N- 172444.280  
 E- 489591.500
- 2005 Sam DeLeo, LS 40341, found nothing in place. A 1/2" diameter iron pipe with cap "DELEO 40341" was set using Williamson's 2002 coordinate values. The distances from the set pipe to the SE corner (2716.37 feet ) and to the NE corner (2670.67 feet ) were verified.
- 2008 Sam DeLeo, LS 40341, found the pipe that he set in 2005 in tact. The 2002 coordinate values and the distances of 2716.37 feet to the SE corner and 2670.67 feet to the NE corner were verified. Reference ties were made.