

A 362863

Certified, Filed and or Recorded on  
JAN. 06, 2009 AT 02:56PM

Signed: OK  
MARILYN J NOVAK B V I  
BENTON COUNTY MINNESOTA  
MARILYN J NOVAK  
COUNTY RECORDER

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter Corner of Section 30, Township 38 N, Range 30 W  
4TH Principal Meridian, State of Minnesota, County of Benton

At the corner location shown on the sketch:

On 8-14-2008 found a Aluminum capped DNR Conservation Marker, 10.5 feet  
DATE west of a fence line going north.

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

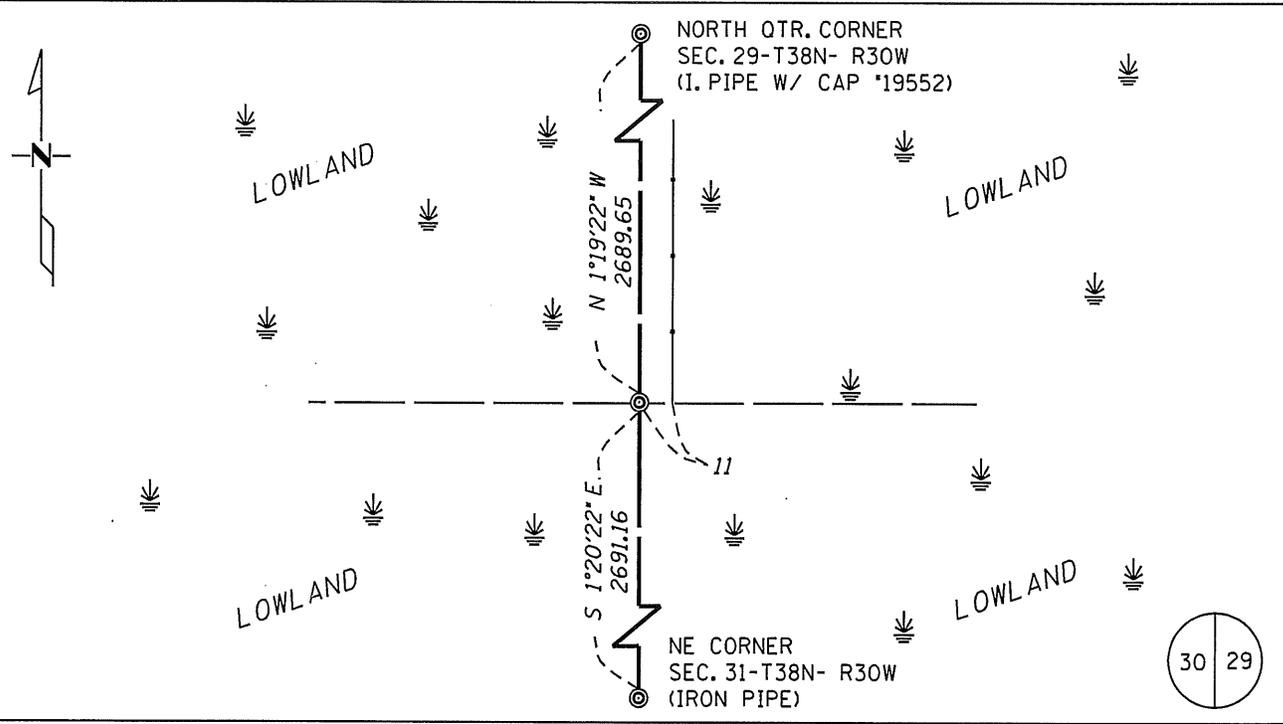

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

Signature Earl J. Dekeo Date 10-3-2008 License No. 40341  
Title:  Land Surveyor     Professional Engineer     County Surveyor     County Engineer

**Statement of Evidence:**

C303

East Quarter Corner of Section 30, Township 38 North, Range 30 West, Graham Township, 4<sup>th</sup> Principal Meridian, Benton County, Minnesota.

- 1852 Original US General Land Office survey set a wood post was set at this location and bearing trees were recorded.  
10" Aspen                      N 43 E                      1282 links
- 1963 The Minnesota Dept. of Natural Resources (fka MN Conservation Dept.) performed a survey in Sections 29 and 30 for the Wisneski WMA (File No. G892-X). They reference the NE of Sec. 30 as being a spike set an the assumed location of the PI of the Co Rd and Twp. Rd. and the NE of Sec. 31 as being a spike at the assumed corner. They set a conservation monument at the assumed position for the E1/4 corner of Sec. 30 and at the corners of the WMA tracts.
- 2002 No resurvey information was found on this corner in the Benton County records.
- 2008 Sam DeLeo, LS 40341, (KLD) found a Minnesota Conservation Department monument approximately midway between the opposing section corners N-S, and 11 feet west of a fence line north. The location fit within reason to other conservation department monuments set in 1963 for Tract 1 of the Wisneski WMA. The monument also fit well with occupation lines to the west in Sec. 30. Coordinates were established on the monument.

Coordinates Obtained by GPS  
NAD 83 (1996 Adjustment)  
N- 172381.158  
E- 484274.628