

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North 1/4 _____ Corner of Section 1, Township 38N, Range 30W, 4th P.M.

STATE OF MINNESOTA, County of Benton

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 6/7/90 placed a cast iron monument
DATE

SKETCH OF REFERENCE TIES

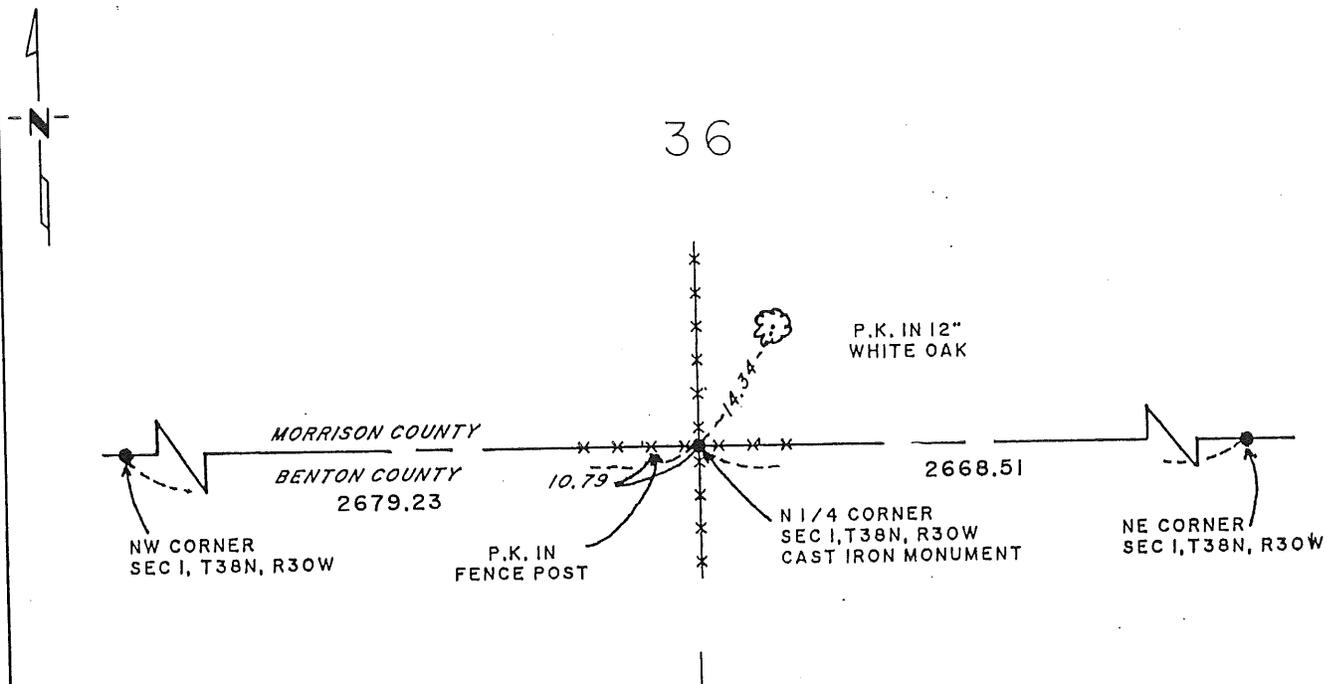

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David E. Miller 7/30/90
SIGNATURE DATE

Registration No. 10461

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

North quarter corner, Section 1,
Township 38 North, Range 30 West, 4th Principal Meridian.

1. During the G.L.O. Survey of 1849, Mr. Theodore Conkey, a U.S. Deputy Surveyor set a wood post to mark this corner.
2. A search of the Benton County Surveyor's records provided no information to the location of this corner.
3. On January 20, 1914, Phil S. Randall, Morrison County Surveyor placed a stake at this corner.
4. On June 7, 1990, Paul E. Wellen & Associates, Inc. dug at the existing fence corner for Mr. Randall's stake and found nothing. We accepted the fence corner as the best location of this corner and set a cast iron monument. We also made new reference ties as indicated.

199553

OFFICE OF
BENTON COUNTY RECORDER
BENTON COUNTY, MN
CERTIFIED TO BE FILED
AND/OR RECORDED ON

SEP 27 11 31 AM '90

ALICE C. ENGELMEYER
COUNTY RECORDER

Alice C. Engelmeier